

ATTENUATORS, DC-40 GHz, 2.92mm (Male to Female)

Model: LF-AXX-2.92MF-40G

ELECTRICAL SPECIFICATIONS:


Frequency Range (GHz)	DC-40GHz
Attenuation (dB):	1~7 ... -0.6 / +0.6 dB
	7~10 ... -0.5 / +0.5 dB
	20 ... -0.6 / +0.6 dB
	30 ... -0.8 / +0.8 dB
	40 ... -1.0/+1.0 dB
VSWR (MAX)	DC- 40GHz 1.3:1
Impedance	50 Ohms
RF Power Rating	2 Watts Average at 25°C
PEAK: 125 Watts	5 Sec Pulse Width ,1% Duty Cycle

B

MECHANICAL SPECIFICATIONS:

Operation Temperature	-55°C +125°C
Connectors	Passivated Stainless Steel
Connector Pins	Beryllium Copper, Gold Plated
Body	Passivated Stainless Steel
Insulators	PTFE, Virgin Electrical Grade

OUTLINE DRAWING: Unit: mm (inches)

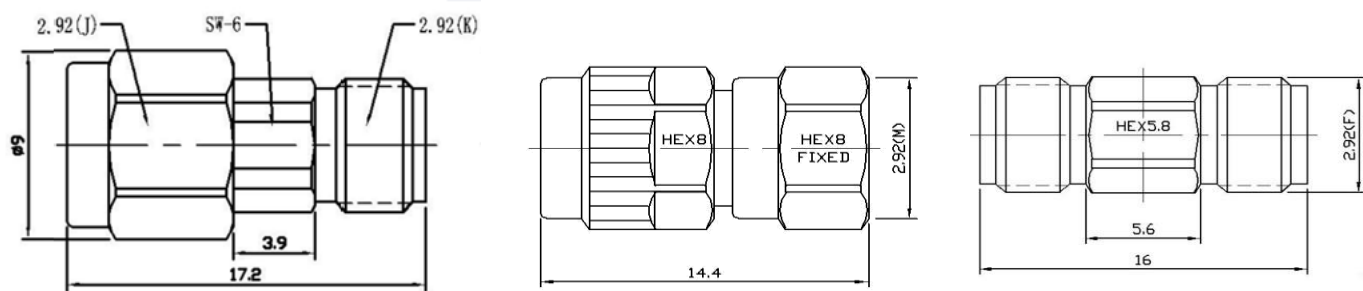

ORDERING INFORMATON:

MODEL NUMBER LF-AXX-2.92MF-40G

dB Value