

# РУКОВОДСТВО ПО НАСТРОЙКЕ ПРОГРАММНОГО ОБЕСПЕЧЕНИЯ HOG4PC

ДЛЯ РАБОТЫ С HOG USB-DMX

Hog USB-DMX - аналог контроллера Hog Widget 512 от компании High End Systems.

Устройство предназначено для работы с ПО Hog4PC, через USB порт компьютера.

## УСТАНОВКА ПРОГРАММНОГО ОБЕСПЕЧЕНИЯ

Скачайте и установите Hog4PC (ключ работает со всеми версиями):

[https://support.etccconnect.com/HES/Consoles/Hog\\_4/Software\\_and\\_Programming/All\\_Hog\\_4\\_OS\\_Software\\_Versions](https://support.etccconnect.com/HES/Consoles/Hog_4/Software_and_Programming/All_Hog_4_OS_Software_Versions)

Home » High End Systems » Consoles » Hog 4 » Software and Programming » All Hog 4 OS Software Versions

## All Hog 4 OS Software Versions

Last updated: Jan 31, 2024

The most recent release can be found on the [Hog 4 product page](#).

The table below lists every version of Hog 4 OS since v2.0.0 and its corresponding release date.


You can click the software version to download the release notes for that version

Software does not have to be installed in order, software versions can be skipped if you are updating software on a desk.

Version (click for release notes)	Release Date	Key Enhancements	Reverse Show File Compatibility	Software Download	Upgrade or Full Install?
<a href="#">3.20.0 b3569</a>	January 15th, 2024	<ul style="list-style-type: none"><li>Support for HPU Motherboard Revision</li><li>Linux Kernel upgrade to Bullseye</li><li>Space added between masters in Virtual Wing Window</li><li>OSC Bundle changes</li></ul>	Compatible with Hog 4 OS v3.14.0 and greater	<ul style="list-style-type: none"><li>Console Full Install</li><li><b>Hog 4 PC</b></li><li>Visualizer Connectivity Driver</li><li>DP8000 Restore</li></ul>	Full Install Required
<a href="#">3.19.1 b3500</a>	April 18th, 2023	<ul style="list-style-type: none"><li>User Scalable Virtual Front Panel</li><li>Encoder Wheel Buttons added to the Virtual Front Panel</li><li>"Panel Always on Top" option added to Hog 4 PC Virtual Front Panel</li><li>Virtual Wing Window Overhaul</li><li>Gadget II v2 Support</li></ul>	Compatible with Hog 4 OS v3.14.0 and greater	<ul style="list-style-type: none"><li>Console Upgrade</li><li>Console Full Install</li><li>Hog 4 PC</li><li>Visualizer Connectivity Driver</li><li>DP8000 Restore</li></ul>	Upgrade only available if currently running 3.16.0, 3.17.0, 3.17.1, or 3.19.0 All other versions require a full install

## УСТАНОВКА ДРАЙВЕРА

Подключите Hog USB-DMX к USB порту компьютера. При первом подключении автоматически инициализируется установка драйвера. Проверить корректность установки можно в диспетчере устройств Windows

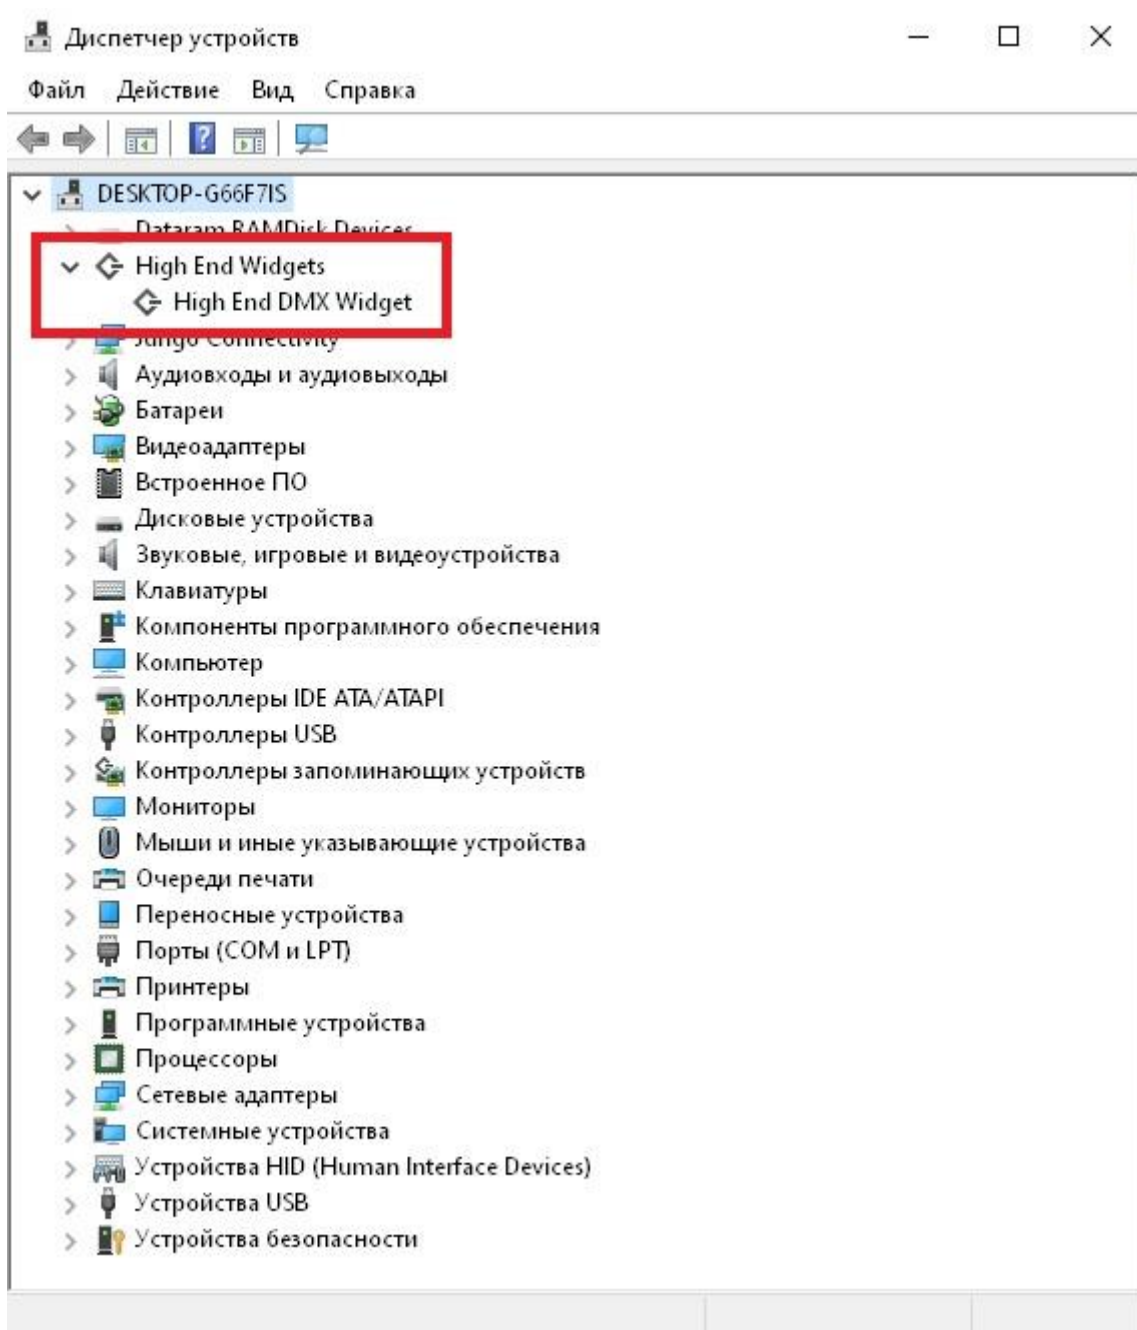

## НАСТРОЙКА HOG4PC

Запустите созданное шоу




В окне Full Panel, нажмите кнопку "Setup"




В нижней части правого окна нажмите "Network".




В окне “Network Console”, курсором мыши укажите на строку “Processor” (нажмите ЛКМ), затем нажмите “Settings”

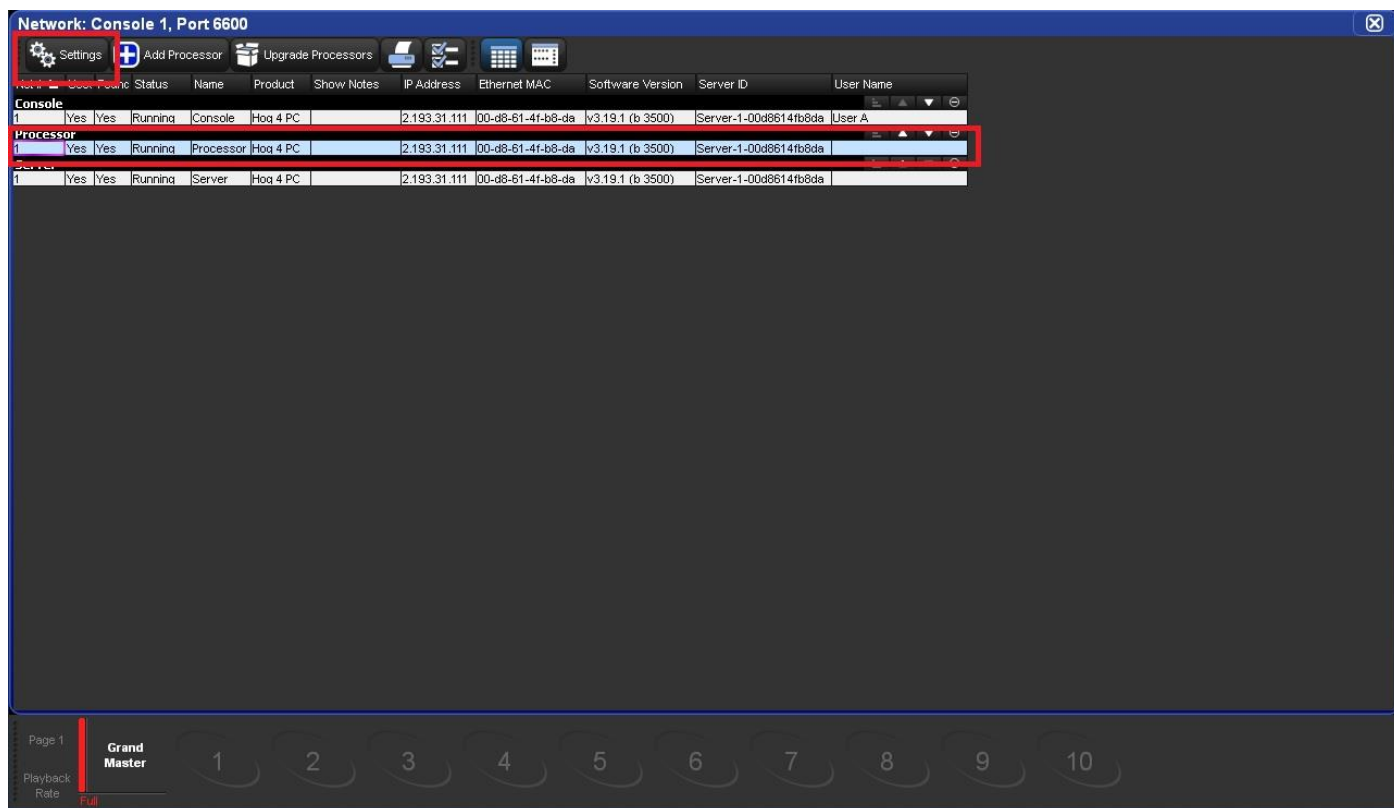


Нажмите “Output” в открывшемся окне

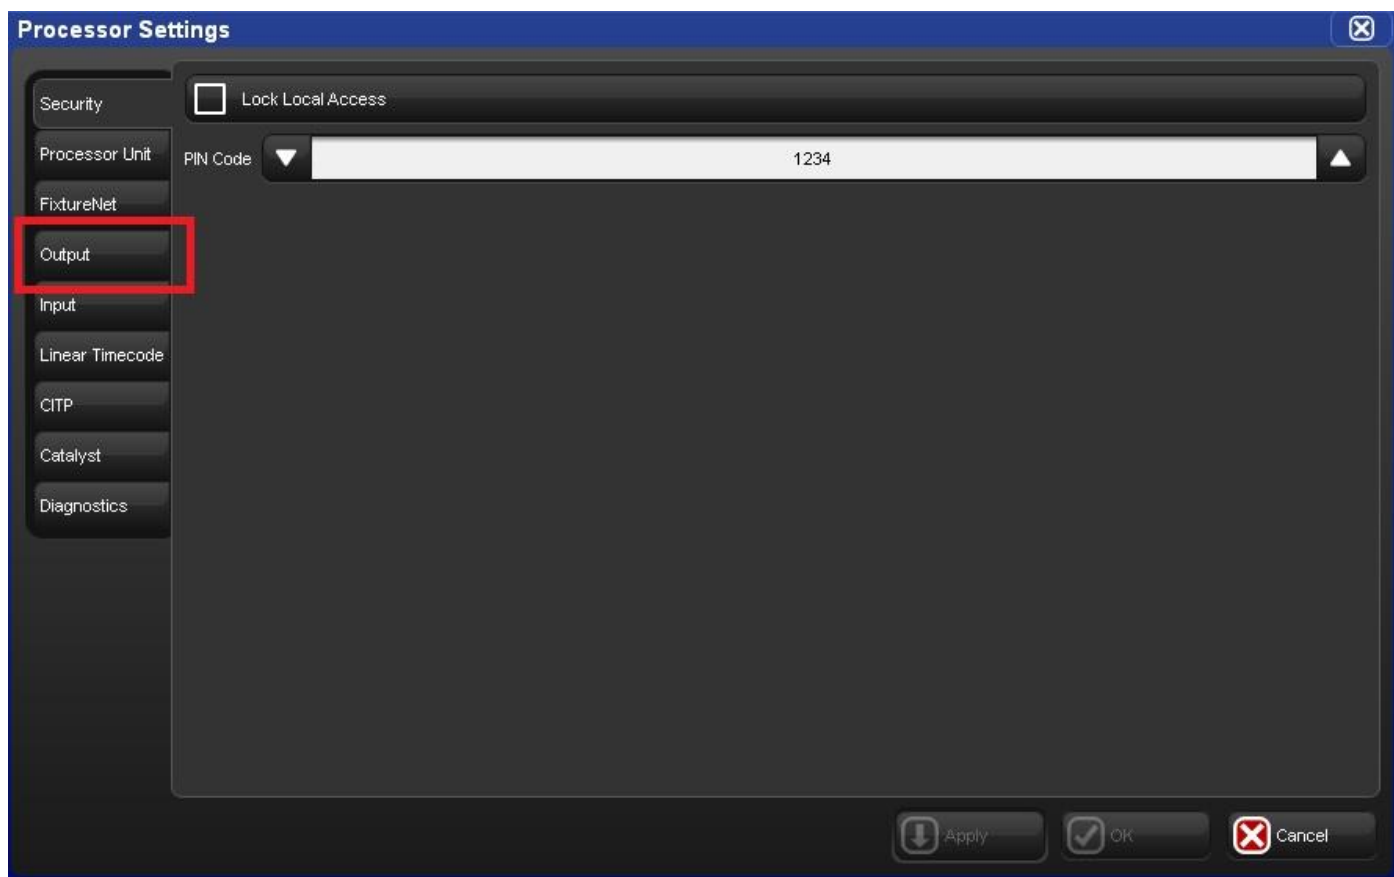


..."Add Mapping"

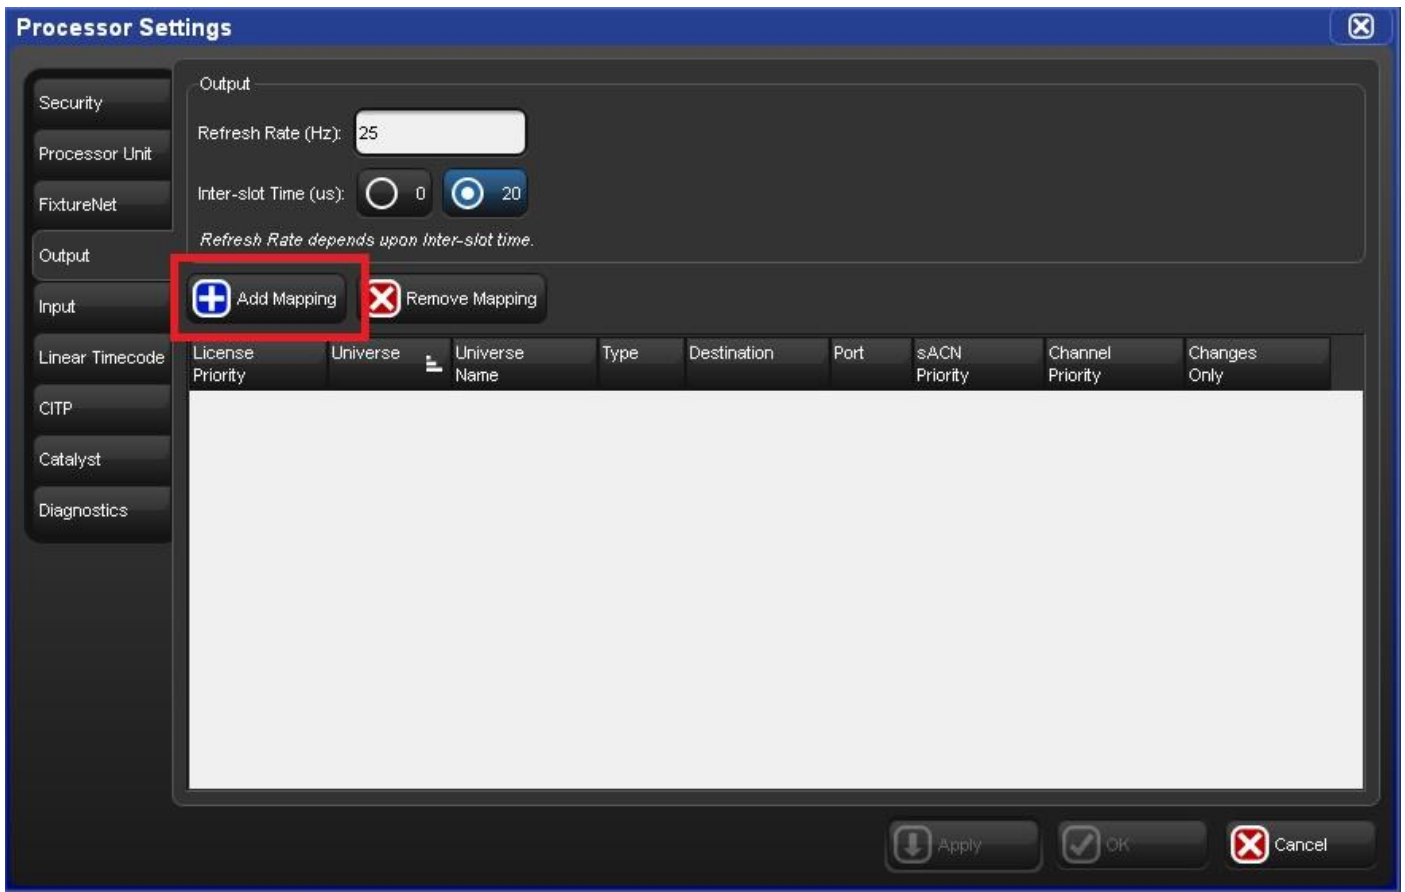

Добавьте Widget, с выбранным номером юниверса DMX

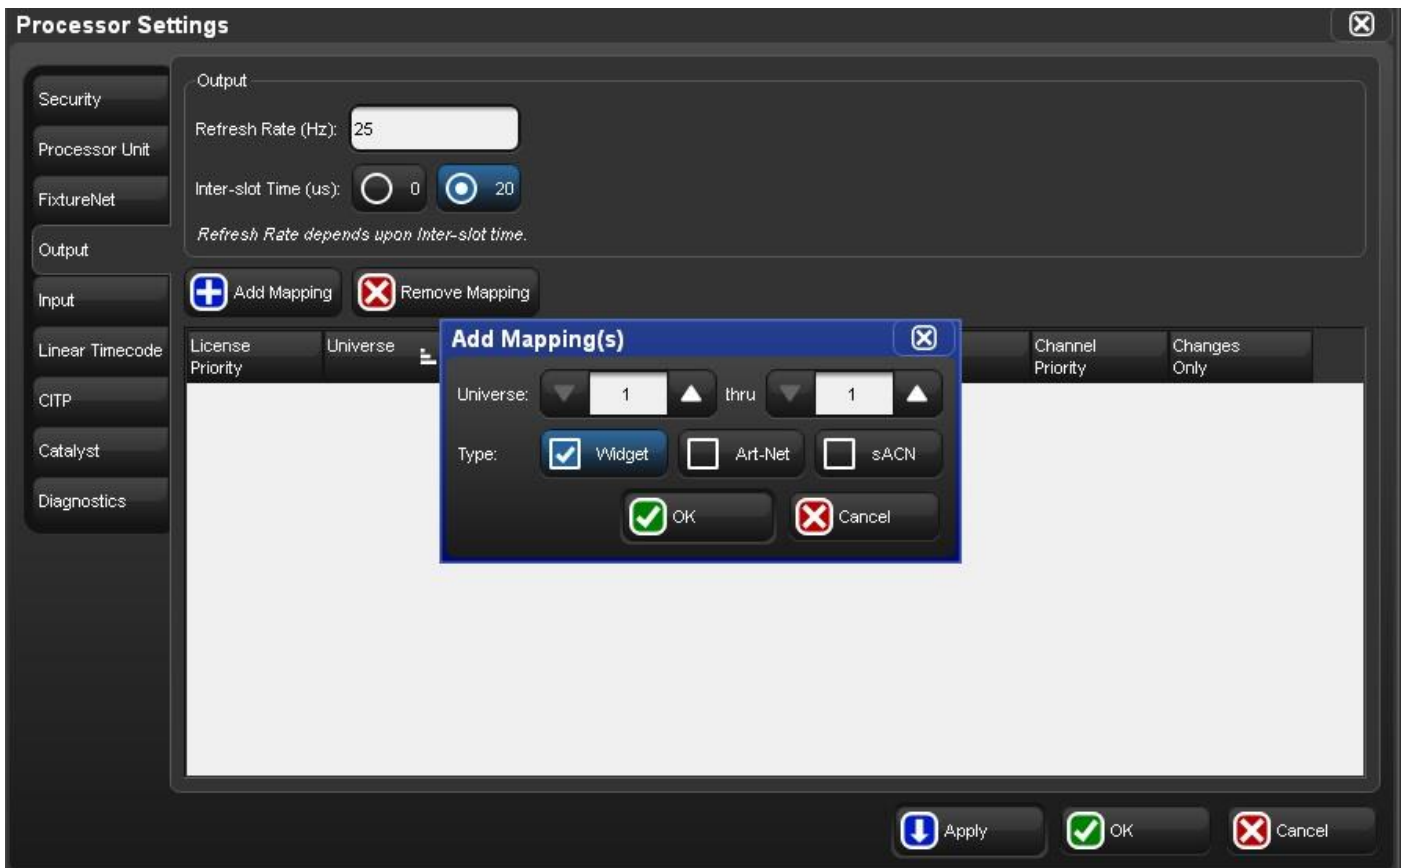

Готовая настройка выглядит следующим образом

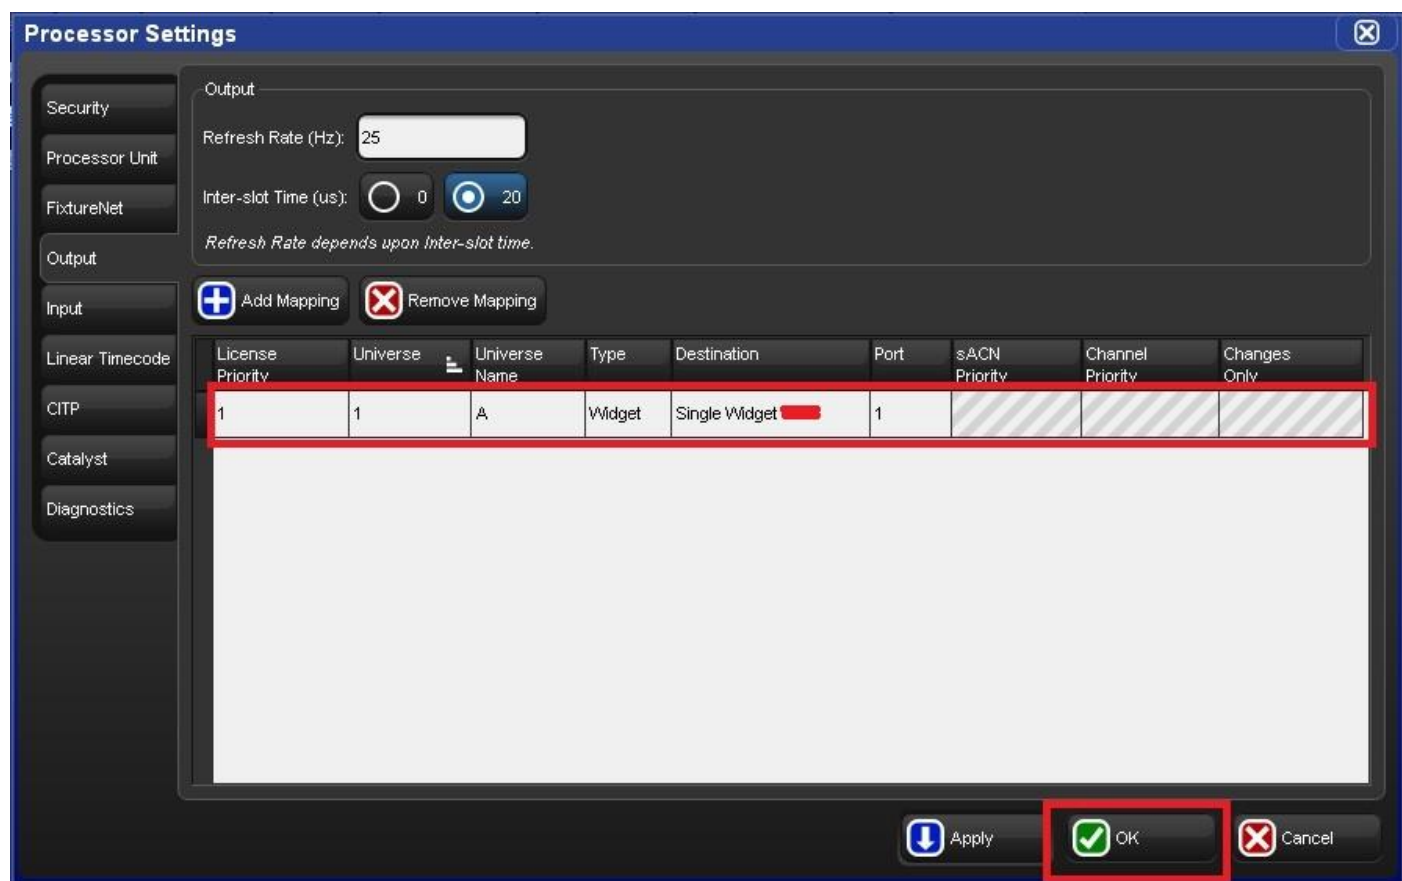

Приобрести данный товар, можно

в интернет-магазине компании ParLed.ru

<https://parled.ru/product/kontroller-usb-dmx-hog>

