

# High-voltage audio head selection switch

## BA7755A / BA7755AF

The standard audio circuits of video cassette recorders and the recording circuits of tape decks use AC bias recording to record the audio signal onto the tape. This bias voltage is some tens of volts, and a high-capacity bias-side switch is required to electronically switch the head when in playback or record mode.

The BA7755A and BA7755AF are high-voltage switching ICs designed to switch voltages as high as  $\pm 65V_{DC}$  or  $AC120V_{P-P}$  ( $f = 70Hz$ ).

Two control systems, one for current control, and one for voltage control are provided, so the ICs can be used in circuits that employ either method.

By combining the BA7755A or BA7755AF with the BA7751ALS recording / playback amplifier, it is possible to construct a compact recording / playback audio circuit. In addition, the BA7755A and BA7755AF are an excellent choice for a wide variety of other high-voltage switching applications.


### ●Applications

Video cassette recorders and tape decks

### ●Features

- 1) High withstanding voltage ( $\pm 65V_{DC}$  (Min.),  $AC120V_{P-P}$  (Min.),  $f = 70Hz$ ).
- 2) Circuits for either current control or voltage control are provided on the chip.
- 3) Compact SIP 5pin or SOP 8pin package.

### ●Block diagram

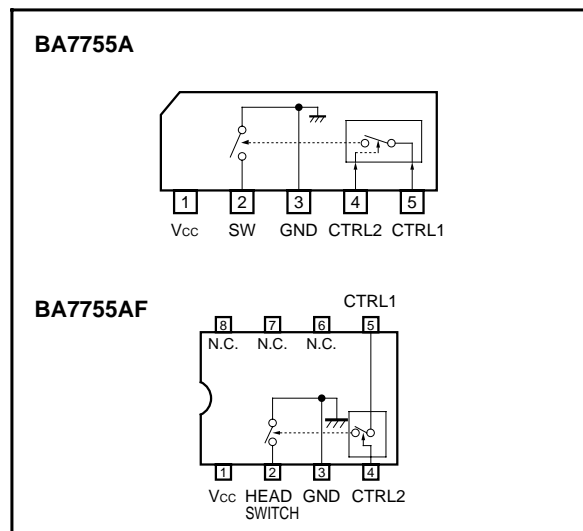

● Absolute maximum ratings (Ta = 25°C)

| Parameter                           | Symbol            | Limits       | Unit |
|-------------------------------------|-------------------|--------------|------|
| Power supply voltage                | V <sub>CC</sub>   | 15           | V    |
| Power dissipation                   | P <sub>d</sub>    | 400*1        | mW   |
| Operating temperature               | T <sub>opr</sub>  | - 10 ~ + 65  | °C   |
| Storage temperature                 | T <sub>stg</sub>  | - 55 ~ + 125 | °C   |
| Breakdown voltage of switch (pin 2) | BV <sub>CC2</sub> | ± 65         | V    |

\* Reduced by 4mW for each increase in Ta of 1°C over 25°C.

● Recommended operating conditions (Ta = 25°C)

| Parameter         | Symbol          | Min. | Typ. | Max. | Unit |
|-------------------|-----------------|------|------|------|------|
| Operating voltage | V <sub>CC</sub> | 4    | 9    | 13   | V    |

● Electrical characteristics (unless otherwise noted, Ta = 25°C and V<sub>CC</sub> = 9V)

| Parameter                    | Symbol                   | Min. | Typ. | Max. | Unit             | Conditions  |
|------------------------------|--------------------------|------|------|------|------------------|---|
| Supply current               | I <sub>CC1</sub>         | —    | 0    | 10   | μA               | Pin4 "L" or "OPEN"<br>Pin5 "OPEN"   |
| Supply current               | I <sub>CC2</sub>         | 2.4  | 3.9  | 5.6  | mA               | Pin 4 "L" or "OPEN"<br>Pin 5 control current: 200μA                       |
| Switch-on resistance         | R <sub>ON</sub>          | —    | 8.0  | 15.0 | Ω                | Pin 4 "L" or "OPEN"<br>Pin 5 control current: 200μA                       |
| Switch leakage current       | I <sub>LOFF</sub>        | —    | 0    | 10   | μA               | Pin 4 "H", or "OPEN", or "L"<br>Pin 5 "OPEN", pin 2 applied voltage ± 65V |
| Switch AC breakdown voltage  | BV <sub>AC</sub>         | 120  | 160  | —    | V <sub>P-P</sub> | f = 70kHz   |
| Switch offset voltage        | V <sub>OS</sub>          | —    | 4.3  | 15.0 | mV               | Pin 4 "L" or "OPEN"<br>Pin 5 control current: 200μA                       |
| CTRL1 SW ON control current  | I <sub>CTRL1 (ON)</sub>  | 50   | —    | —    | μA               | —   |
| CTRL1 SW OFF control current | I <sub>CTRL1 (OFF)</sub> | —    | —    | 1    | μA               | —   |
| CTRL2 threshold voltage      | V <sub>TH1</sub>         | 1.70 | 2.15 | 2.60 | V                | —   |
| CTRL2 input resistance       | R <sub>CTRL2</sub>       | 21.0 | 31.0 | 42.0 | kΩ               | —   |

● Switch control methods

(1) Control with pins 4 and 5

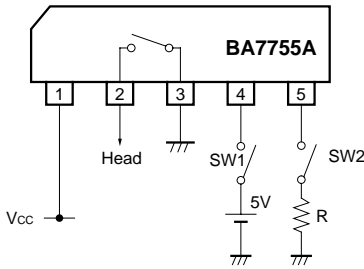


Fig. 1

| SW1 | SW2 | Between pins 2 and 3 |
|-----|-----|----------------------|
| OFF | OFF | High impedance       |
|     | ON  | Low impedance        |
| ON  | OFF | High impedance       |
|     | ON  | High impedance       |

$$R \approx \frac{V_{cc} - 1.4 [V]}{200 [\mu A]} - 10 [k\Omega]$$

When  $V_{cc} = 9V$  (approx)  $R \approx 28k\Omega$

(2) Control with pin 4 only




Fig. 2

| SW1 | Between pins 2 and 3 |
|-----|----------------------|
| OFF | Low impedance        |
| ON  | High impedance       |

(3) When used with the BA7751ALS

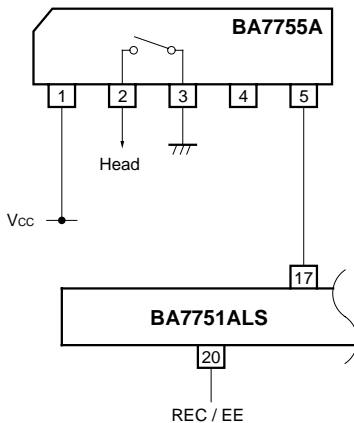


Fig. 3

| REC / EEE | Between pins 2 and 3 |
|-----------|----------------------|
| EE (L)    | Low impedance        |
| REC (H)   | High impedance       |

●Application example


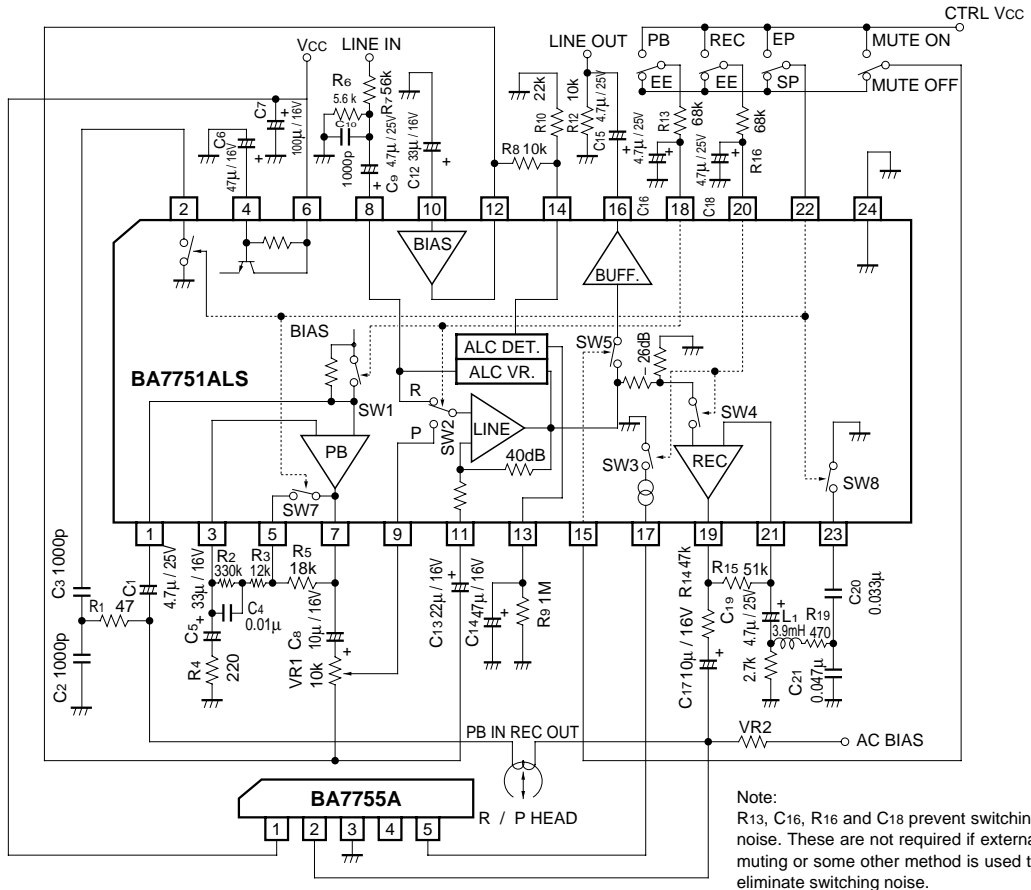


Fig.4

●External dimensions (Units: mm)

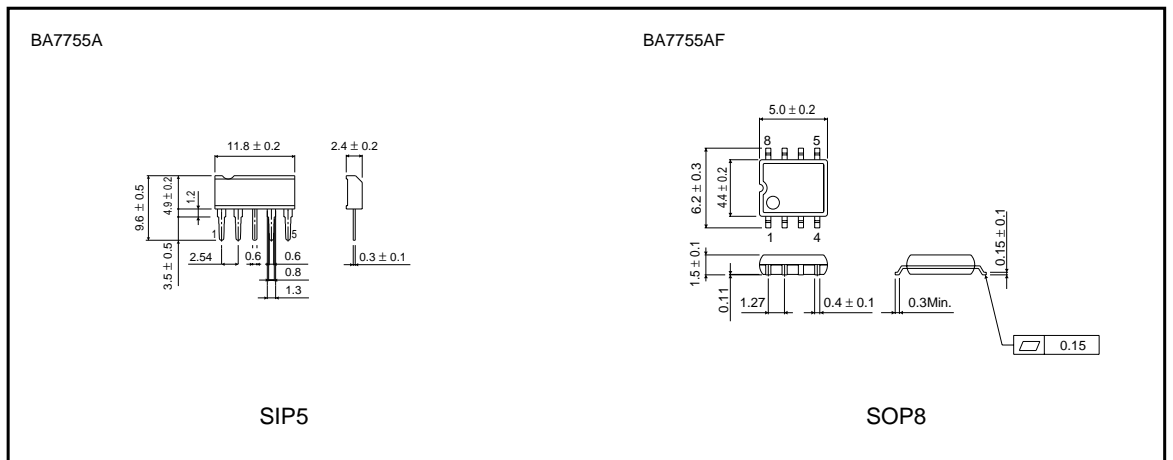

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.