

## ATTENUATORS, DC–26.5GHz, SMA (Male to Female)

Model: LF-AXX-SMA-26.5G


### ELECTRICAL SPECIFICATIONS:

Frequency Range (GHz)	DC – 26.5 GHz
Attenuation (dB):	1 through 6 ± 0.5 dB
	7 through 10 ± 0.5 dB
	20 ± 0.5 dB
	30 ± 0.6 dB
VSWR (MAX)	DC – 26.5 GHz.....1.2 : 1
Impedance	50 Ohms
RF Power Rating	2 Watts Average at 25°C
PEAK: 200 Watts	(5 µSec Pulse Width , 0.05% Duty Cycle)

### MECHANICAL SPECIFICATIONS:

Operation Temperature	-55°C +125°C
Connectors	Passivated Stainless Steel
Connector Pins	Beryllium Copper, Gold Plated
Body	Passivated Stainless Steel
Insulators	PTFE, Virgin Electrical Grade

### OUTLINE DRAWING: Unit: mm

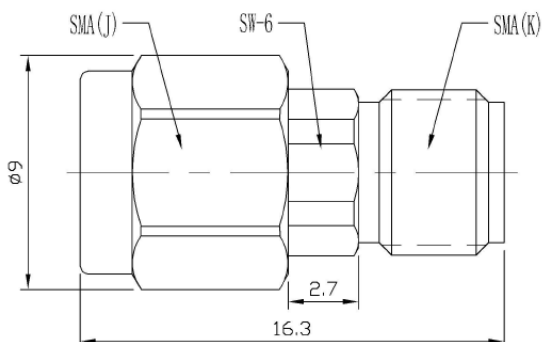

### ORDERING INFORMATION:

MODEL NUMBER LF-AXX-SMA-26.5G

