




NO. 4D350S-2021-A0

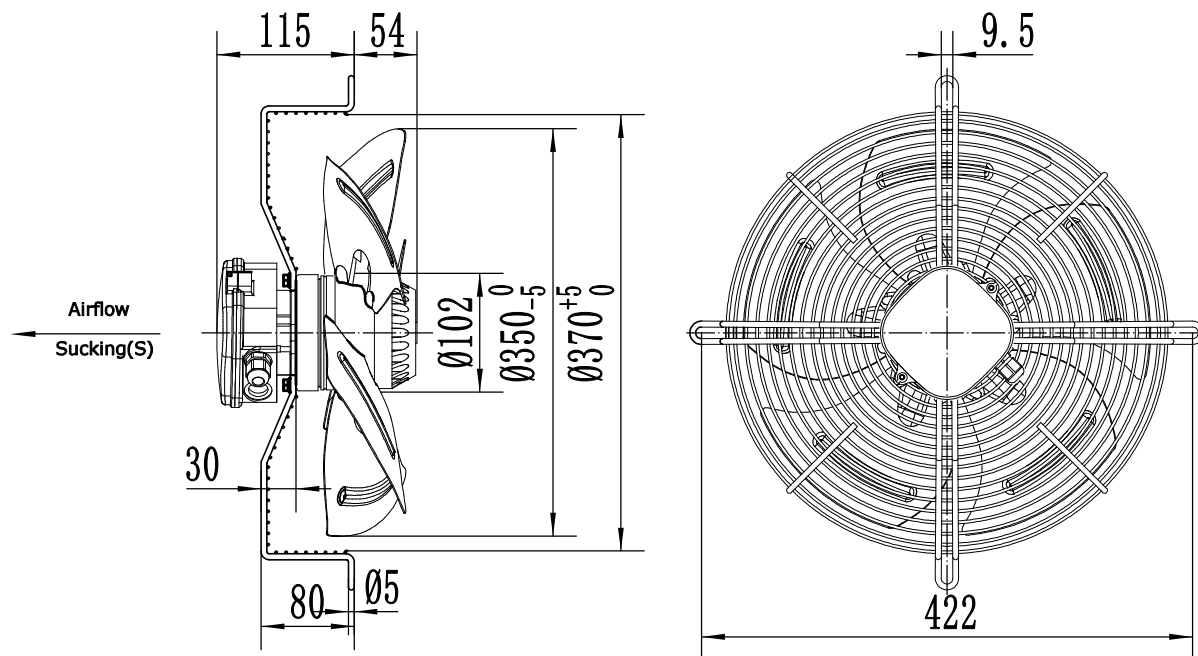


LABEL (铭牌):

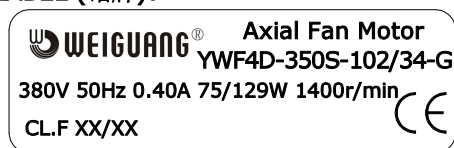

WIRING DIAGRAM (接线图):

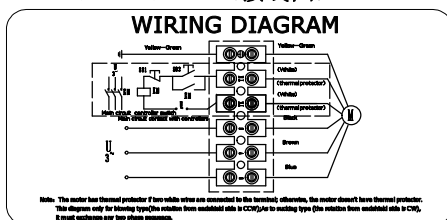

FLOW RATE CURVE (风量曲线):

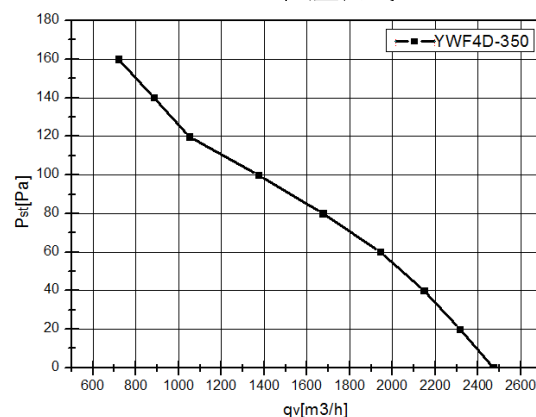

WEIGUANG®

SPECIFICATION 规格说明
HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Three phases motor
MOTOR TYPE 电机型号	YWF4D-350S-102/34-G
VOLTAGE 额定电压 (V)	380
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	129
CURRENT 电流 (A)	0.40
SPEED 转速 (r/min)	1400
AIR FLOW 风量 (m³/h)	2305
NOISE 噪音 (dBA)	64
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
PROTECTION CLASS 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire RV-90 4G 0.50mm²+2G 0.30mm², Length 100mm in terminal box connected 接线盒 (4芯0.5mm²+2芯0.3mm²线长100mm)
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT净重/毛重	5.0/6.0kg
PACKING 包装	38.5*38.5*19cm

					SIGN		DATE	TITLE	
					DRN. BY			YWF4D-350S-102/34-G	
					CHD. BY			PROJECTION	A4
					ENG. BY				SCALE
					APP. BY				SHEET: of
REV.	DESCRIPTION	APPROVED	DATE						