


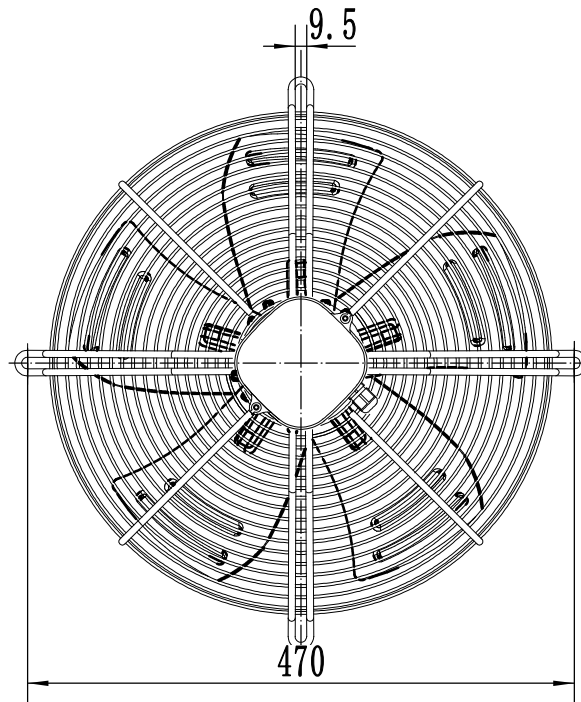


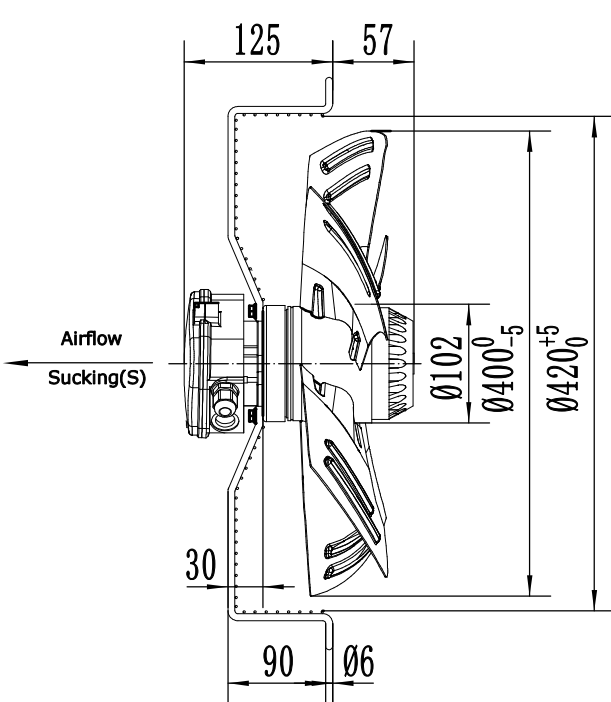


LABEL (铭牌):

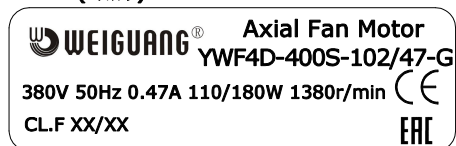

WIRING DIAGRAM (接线图) :

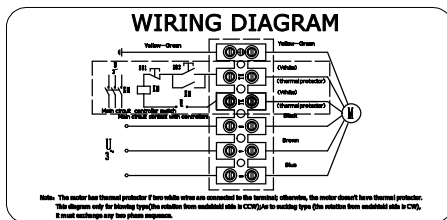

FLOW RATE CURVE (风量曲线) :

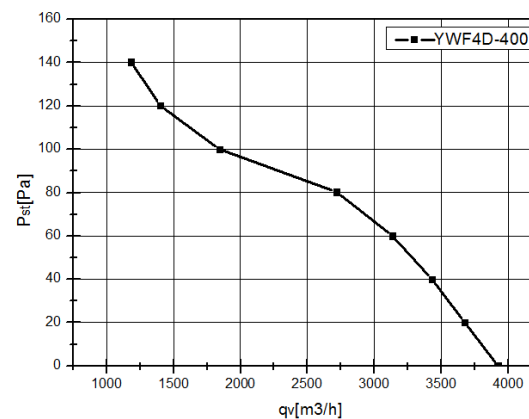

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Three phases motor
MOTOR TYPE 电机型号	YWF4D-400S-102/47-G
VOLTAGE 额定电压 (V)	380
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	180
CURRENT 电流 (A)	0.47
SPEED 转速 (r/min)	1380
AIR FLOW 风量20Pa (m³/h)	3675
NOISE 噪音 (dBA)	67
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针，从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
PROTECTION CLASS 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire RV-90 4G 0.50mm²+2G 0.30mm², Length 100mm in terminal box connected 接线盒（4芯0.5mm²+2芯0.3mm²线长100mm）
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT净重/毛重	6.0/7.0kg
PACKING 包装	43.5*43.5*20cm

						SIGN	DATE	TITLE	
						DRN. BY		YWF4D-400S-102/47-G	
						CHD. BY		PROJECTION  A4 SCALE SHEET: of	
						ENG. BY			
REV.	DESCRIPTION	APPROVED	DATE			APP. BY			