






LABEL (铭牌):

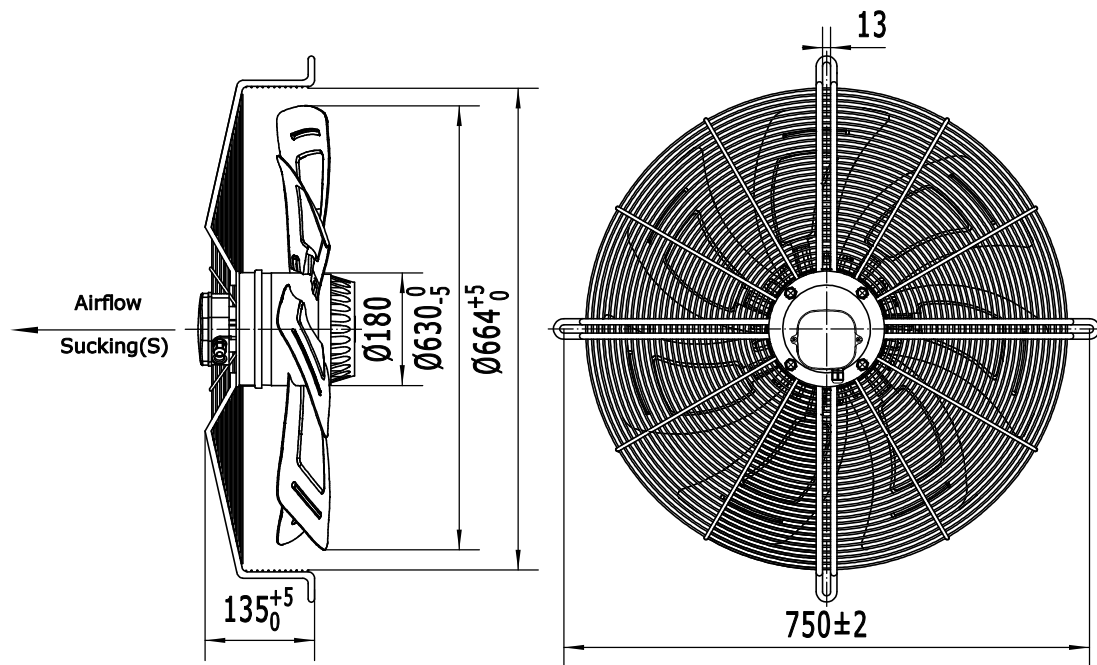

WIRING DIAGRAM (接线图):

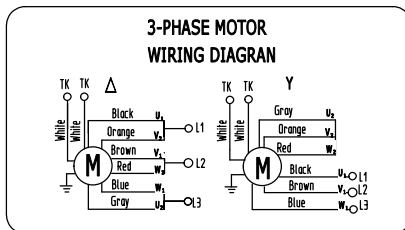

FLOW RATE CURVE (风量曲线):

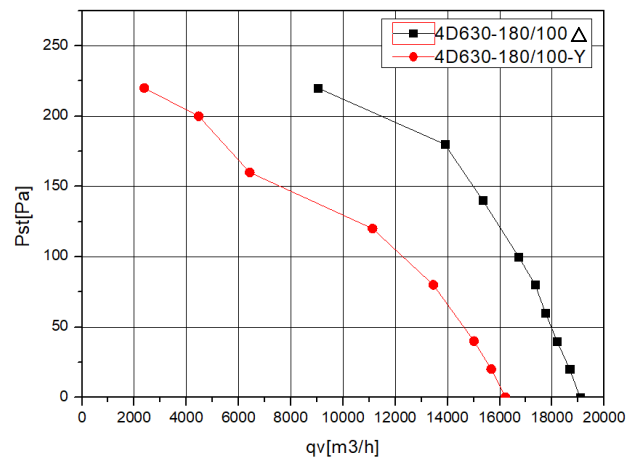

UNIT 类型	Axial fan motor 外转子轴流风机	
MOTOR 电机型式	Three phases motor	
MOTOR TYPE 电机型号	YWF4D-630S-180/100-G	
VOLTAGE 额定电压 (V)	△400	Y400
FREQUENCY 频率 (Hz)	50	50
INPUT POWER 输入功率 (W)	2600	1900
CURRENT 电流 (A)	4.80	3.00
SPEED 转速 (r/min)	1370	1100
AIR FLOW 风量20Pa (m³/h)	18674	15672
NOISE 噪音 (dBA)	82	78
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看	
INSULATION CLASS 绝缘等级	F	
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器	
TEMPERATURE RISE 温升	75K max 运行温升不超过75K	
PROTECTION CLASS 防护等级	IP54	
OPERATING TYPE 工作定额	S1 连续工作制	
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃	
BEARINGS 轴承型式	Ball bearings 滚珠轴承	
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装	
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 7G 1.31mm²+ 2G 0.35mm², Length 100mm in terminal box connected 接线盒 (7芯1.31mm²+2芯0.35mm²线长100mm)	
APPROVALS 认证标记	CE	
NET WEIGHT/GROSS WEIGHT净重/毛重	35/40kg	
PACKING 包装	68*68*30.5cm	

							SIGN	DATE	TITLE YWF4D-630S-180/100-G	
						DRN.BY				
						CHD.BY				
						ENG.BY			PROJECTION  A4 SCALE SHEET: of	
REV.	DESCRIPTION	APPROVED	DATE			APP.BY				