

# NON-SPRING RETURN PLANT VALVE ACTUATORS

## ACTUATORS

### BAD / BMD

4 Nm, ON/OFF, FLOATING AND PROPORTIONAL CONTROL ROTARY ACTUATORS FOR BALL VALVES


The Electric Actuator Series have been developed for operation of ball valves.

These synchronous, motor driven actuators are used to provide accurate positioning on Joventa JV Series DN15, DN20 and DN25 ball valves.

### FEATURES

- ON/OFF, Floating with timeout and Proportional control
- Load-independent running time
- Up to 5 actuators in parallel operation possible
- Manual release button
- 1.2 m PVC cable
- Selectable direction of rotation
- Automatic shut-off at end position

### DIMENSIONS (in mm)

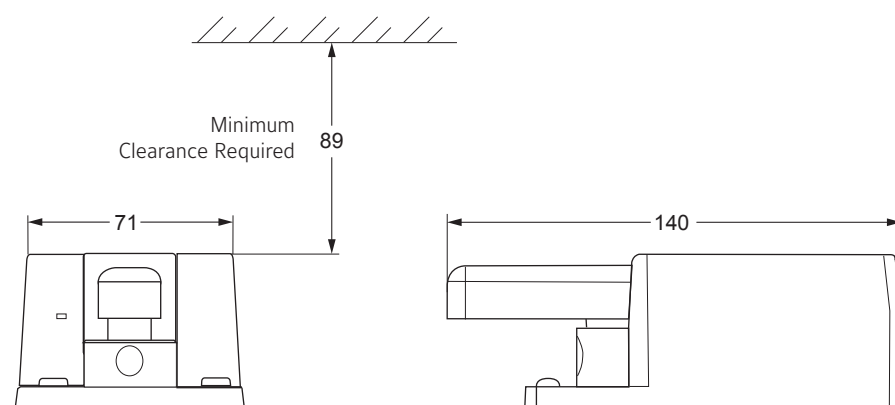

# NON-SPRING RETURN PLANT VALVE ACTUATORS



BAD / BMD

## ORDERING INFORMATION

CODES	RUNNING TIME (s/mm)	CONTROL SIGNALS	SUPPLY VOLTAGE (50/60 Hz)
BAD1.4	72	Floating without timeout	24 VAC
BAD1		ON/OFF and Floating with timeout	
BAD2			100 to 240 VAC
BMD1.2			Proportional 0(2)...10 VDC 0(4)...20 mA