

ATTENUATORS, DC-34GHz, 3.5mm (Male to Female), 25W

Model: LF-A25-XX-3.5MF-34G-B


ELECTRICAL SPECIFICATIONS:

Frequency Range (GHz)	DC – 34 GHz
Attenuation (dB):	41~50.....1.5/+2.0 dB
	60.....1.2/+1.8 dB
	70.....1.5/+1.8 dB
	80.....1.5/+1.8 dB
VSWR (MAX)	DC – 34GHz. 1.45:.....1
Impedance	50 Ohms
RF Power Rating	25Watts Average at 25°C
PEAK: 200 Watts	(5 μSec Pulse Width ,6% Duty Cycle)

MECHANICAL SPECIFICATIONS:

Operation Temperature	-55°C - +100°C
Connectors	Passivated Stainless Steel or Brass, Gold Plated
Connector Pins	Beryllium Copper, Gold Plated
Body	Black, Finned Aluminum

OUTLINE DRAWING: Unit: mm

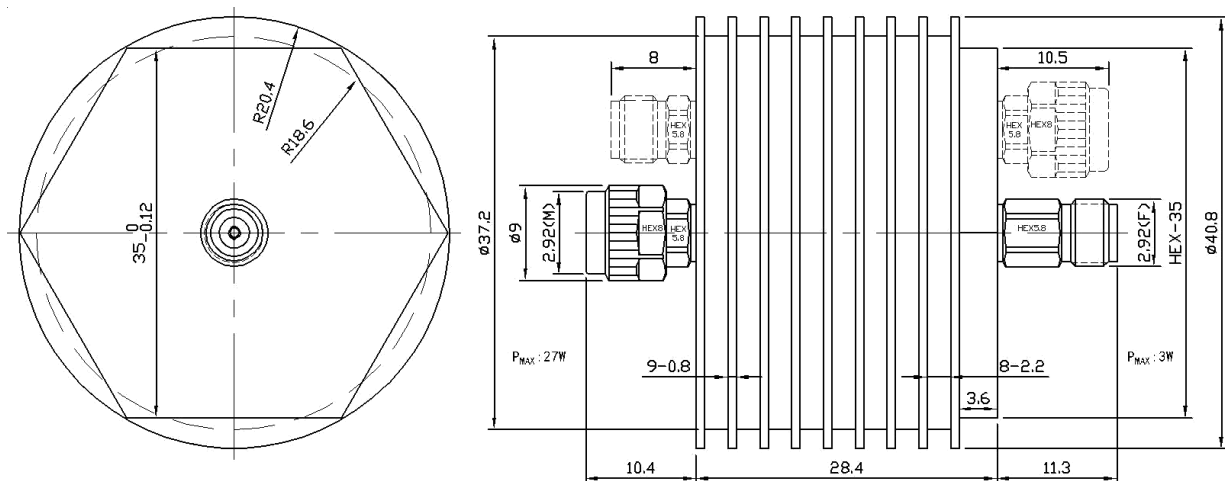

ORDERING INFORMATION:

MODEL NUMBER LF-A25-XX-3.5MF-34G-B

↓
dB value