

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

**Nominal data**

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G355-RG56-01    |            |
| Motor                    | M3G112-EA         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 2240       |
| Power consumption        | W                 | 930        |
| Current draw             | A                 | 1.7        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

**Data according to ErP Directive**

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 66.9   | 51.1      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 77.8   | 62        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_{ed}$ | kW                | 0.92 |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 3205 |
| 09 Pressure increase $p_{fs}$ | Pa                | 640  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 2240 |
| 11 Specific ratio*            |                   | 1.01 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 


LU-140167



## Technical description


|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 8.4 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Fan size                                                                   | 355 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Number of blades                                                           | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Degree of protection                                                       | IP54                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Insulation class                                                           | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Moisture (F) / Environmental (H) protection class                          | F4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Installation position                                                      | See product drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> <li>- Output for slave 0-10 V</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- External 24 V input (parameter setting)</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| EMC circuit feedback                                                       | According to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Electrical hookup                                                          | Via terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Conformity with standards                                                  | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Approval                                                                   | CCC; EAC; UL 1004-7 + 60730                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## Product drawing

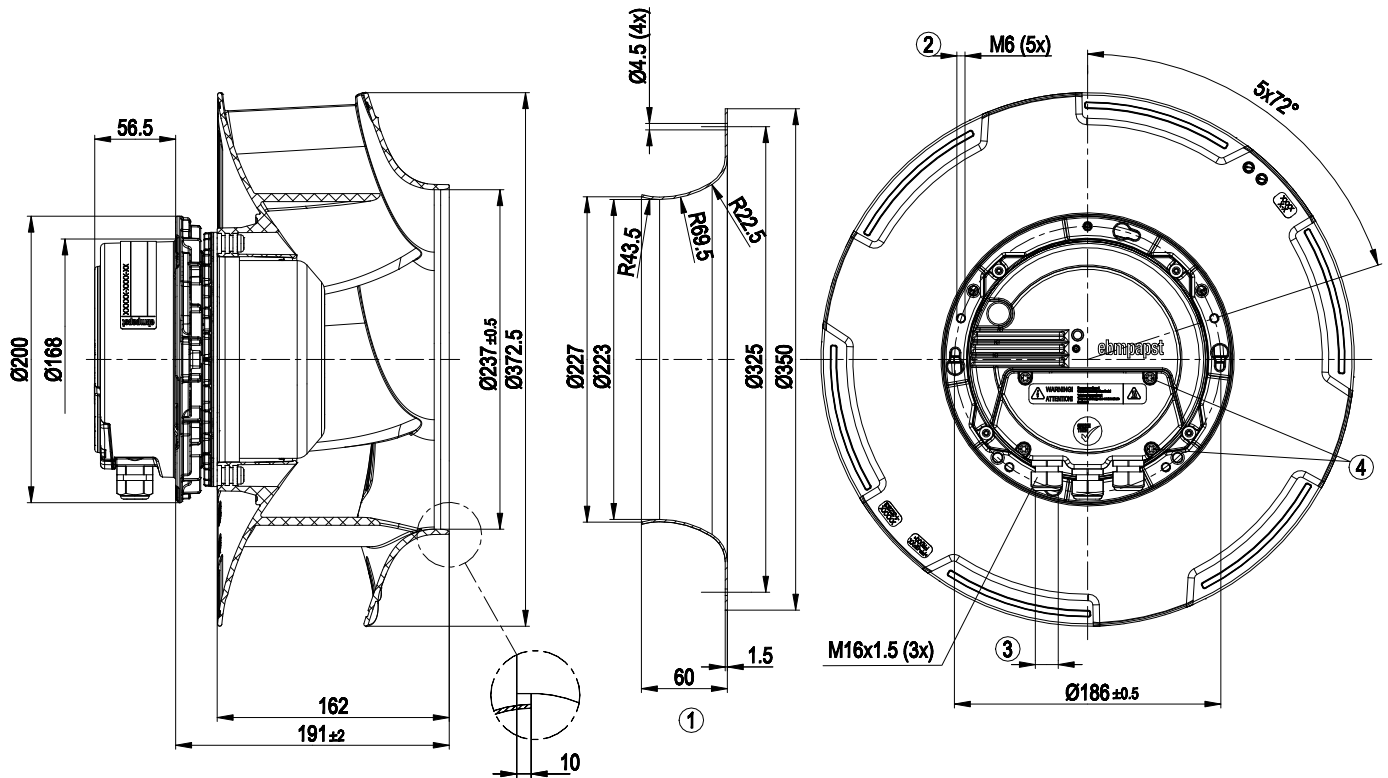


|   |                                                                           |
|---|---------------------------------------------------------------------------|
| 1 | Accessory part: inlet ring 35500-2-4013 not included in scope of delivery |
| 2 | Max. clearance for screw 16 mm                                            |
| 3 | Cable diameter min. 4 mm, max. 10 mm; tightening torque $4 \pm 0.6$ Nm    |
| 4 | Tightening torque $3.5 \pm 0.5$ Nm                                        |

## Connection diagram

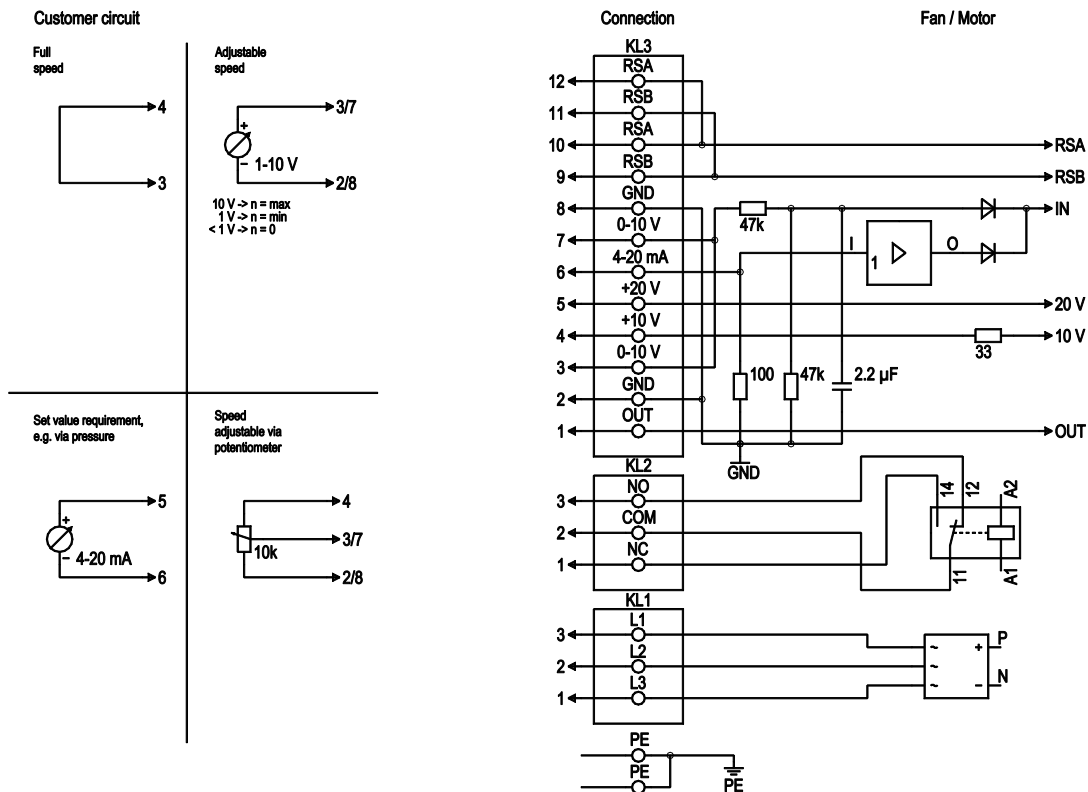

| No. | Conn.   | Designation | Function/assignment                                                                                                                                                           |
|-----|---------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PE  |         | PE          | Protective earth terminal                                                                                                                                                     |
| KL1 | 1, 2, 3 | L1, L2, L3  | Power supply, voltage range (see nameplate), 50/60 Hz                                                                                                                         |
| KL2 | 1       | NC          | Floating status contact, break for failure                                                                                                                                    |
| KL2 | 2       | COM         | floating status contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)                                                                           |
| KL2 | 3       | NO          | Floating status contact, make for failure                                                                                                                                     |
| KL3 | 1       | OUT         | Analog output, 0-10 VDC, max. 3 mA, SELV, output of current motor modulation level:<br>1 V corresponds to 10% modulation level.<br>10 V corresponds to 100% modulation level. |
| KL3 | 2, 8    | GND         | Reference ground for control interface, SELV                                                                                                                                  |
| KL3 | 3, 7    | 0-10 V      | Use control / current sensor value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV                                                                |
| KL3 | 4       | +10 V       | Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV                                                                         |
| KL3 | 5       | +20 V       | Voltage output 20 VDC (+25%/-10%), max. 50 mA, power supply for external devices (e.g. sensors), SELV                                                                         |
| KL3 | 6       | 4-20 mA     | Use control / current sensor value input 4-20 mA, impedance 100 Ω only as alternative to 0-10 V input, SELV                                                                   |
| KL3 | 9, 11   | RSB         | RS485 interface for MODBUS, RSB                                                                                                                                               |
| KL3 | 10, 12  | RSA         | RS485 interface for MODBUS, RSA                                                                                                                                               |

## Curves: Air performance 50 Hz

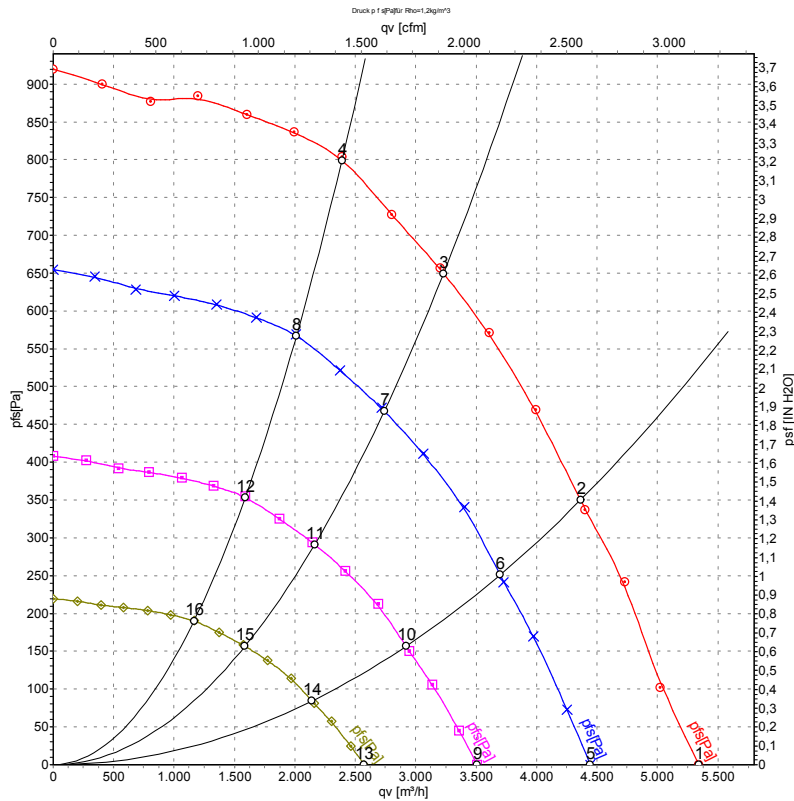

Measurement: LU-140167-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | CFM            | inH2O           |
| 1  | 400 | 50 | 2280              | 670             | 1.30 | 83                | 90                | 5340           | 0               | 3145           | 0.00            |
| 2  | 400 | 50 | 2240              | 810             | 1.60 | 75                | 82                | 4365           | 350             | 2570           | 1.41            |
| 3  | 400 | 50 | 2240              | 930             | 1.70 | 67                | 75                | 3230           | 650             | 1900           | 2.61            |
| 4  | 400 | 50 | 2255              | 890             | 1.70 | 68                | 76                | 2390           | 800             | 1405           | 3.21            |
| 5  | 400 | 50 | 1900              | 387             | 0.77 | 78                | 85                | 4445           | 0               | 2615           | 0.00            |
| 6  | 400 | 50 | 1900              | 495             | 0.96 | 71                | 78                | 3700           | 251             | 2175           | 1.01            |
| 7  | 400 | 50 | 1900              | 566             | 1.08 | 63                | 71                | 2740           | 468             | 1610           | 1.88            |
| 8  | 400 | 50 | 1900              | 530             | 1.02 | 64                | 72                | 2010           | 570             | 1185           | 2.29            |
| 9  | 400 | 50 | 1500              | 190             | 0.38 | 72                | 79                | 3510           | 0               | 2065           | 0.00            |
| 10 | 400 | 50 | 1500              | 244             | 0.47 | 65                | 72                | 2920           | 156             | 1720           | 0.63            |
| 11 | 400 | 50 | 1500              | 278             | 0.53 | 57                | 65                | 2165           | 292             | 1275           | 1.17            |
| 12 | 400 | 50 | 1500              | 261             | 0.50 | 58                | 66                | 1590           | 355             | 935            | 1.43            |
| 13 | 400 | 50 | 1100              | 75              | 0.15 | 64                | 71                | 2575           | 0               | 1515           | 0.00            |
| 14 | 400 | 50 | 1100              | 96              | 0.19 | 57                | 64                | 2140           | 84              | 1260           | 0.34            |
| 15 | 400 | 50 | 1100              | 110             | 0.21 | 50                | 57                | 1585           | 157             | 935            | 0.63            |
| 16 | 400 | 50 | 1100              | 103             | 0.20 | 50                | 58                | 1165           | 191             | 685            | 0.77            |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

