


V Series Cartridge Kits

型号说明 Model Code

(F3-)	PC-	25V	-19	L
	泵芯标记 Cartridge Kits Mark	系列号 Series designation	排量代号 Displacement	旋转方向 Rotation
无要求可省略 Omit if not required F3- 氟橡胶密封 F3-Viton seals	PC—单泵泵芯或双联泵轴端泵芯 PC—Single pump cartridge kits or double pump shaft end pump cartridge kits PCT—双联泵盖端泵芯 PCT—Double pump cover end pump cartridge kits	20V	2,3,4,5,6,7,8, 9,10,11,12,14	(从泵的轴端看) (Viewed from shaft end of pump) R- 顺时针旋转 (无标记) R-Clockwise (Omit)
		25V	10,12,14,15,17, 19,21,25	
		35V	21,25,30,32,35,338,45	L- 逆时针旋转 L-Counter clockwise
		45V	42,45,50,57,60,666,75	

外型尺寸 Installation Dimensions

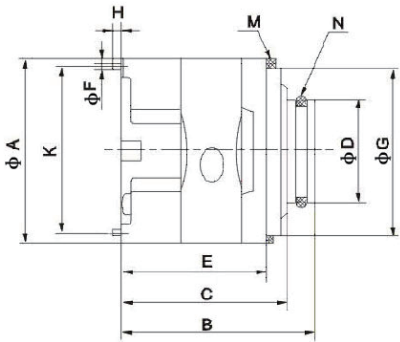

系列号 Series	A	B	C	D	E	F	G	H	K	M (档圈 Gasket)	N (O 形圈 O-Ring)
20V	82.5	82	70.8	47.2	61.8	4.75	76.2	6	73.8	82.76×76.26×3.5	40×3.55
25V	96.8	98.5	87.2	52.2	71.6	4.75	90.5	5	88.19	97×91×3.5	43.7×3.55
35V	114.3	117.7	105	72.2	90.3	6.35	108	6.3	103.94	144.5×108.5×3.5	63.09×3.53
45V	133.3	141	129.6	80.2	106.1	6.35	127	10	124	133.6×127.6×3.5	73×3.55

系列号 Series	转子内花键参数 Internal spline parameter of rotor				
	齿节 Spline Pitch	齿数 Number of teech	压力角 Pressure angle	大径 Major diameter	小径 Minor diameter
20V	48/96	30	45°	16.617	15.56
25V	48/96	40	45°	21.9	20.86
35V	40/80	37	45°	24.38	23.10
45V	12/24	14	30°	32.59	27.60