


型号说明 Model Code

(F3-)	PC-	25VQ	-19	L
	泵芯标记 Cartridge Kits Mark	系列号 Series designation	排量代号 Displacement	旋转方向 Rotation
无要求可省略 Omit if not required F3- 氟橡胶密封 F3-Viton seals	PC—单泵泵芯或双联泵轴端泵芯 PC—Single pump cartridge kits or double pump shaft end pump cartridge kits PCT—双联泵盖端泵芯 PCT—Double pump cover end pump cartridge kits	20VQ	2,3,4,5,6,7,8, 9,10,11,12,14	(从泵的轴端看) (Viewed from shaft end of pump) R- 顺时针旋转 (无标记) R-Clockwise (Omit) L- 逆时针旋转 L-Counter clockwise
		25VQ	10,12,14,15,17, 19,21,25	
		35VQ	21,25,30,32,35,38,45	
		45VQ	42,45,50,57,60,66,75	

外型尺寸 Installation Dimensions

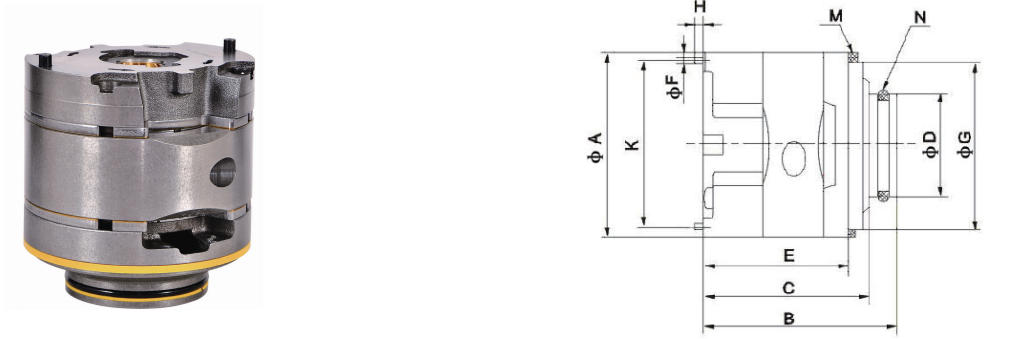

系列号 Series	A	B	C	D	E	F	G	H	K	M (档圈 Gasket)	N (O 形圈 O-Ring)
20VQ	82.5	82.2	71	47.2	62	4.75	76.2	6	73.8	82.76×76.26×3.5	40×3.55
25VQ	96.8	99.2	87.2	52.2	72.2	4.75	90.5	6	88.19	97×91×3.5	43.7×3.55
35VQ	114.3	117.7	104.7	72.2	90.3	6.35	108	6	103.94	144.5×108.5×3.5	63.09×3.53
45VQ	133.3	141	129.4	80.2	105.4	6.35	127	11	124	133.6×127.6×3.5	73×3.55

系列号 Series	转子内花键参数 Internal spline parameter of rotor				
	齿节 Spline Pitch	齿数 Number of teech	压力角 Pressure angle	大径 Major diameter	小径 Minor diameter
20VQ	48/96	30	45°	16.617	15.56
25VQ	48/96	40	45°	21.9	20.86
35VQ	40/80	37	45°	24.38	23.10
45VQ	12/24	14	30°	32.59	27.60