
# SELECTION GUIDE FOR EMERGENCY LIGHTS ACCORDING TO INSTALLATION HEIGHT


#### 24-230 V CENTRALLY SUPPLIED EMERGENCY LIGHTS

Emerg	ency lig	hts for	open a	reas:											
Installat	ion heigh	t													
2 m	3 m	4 m	5 m	6 m	7 m	8 m	10 m	12 m	14 m	16 m	18 m	20 m		26 m	30 m
			NESPOT ess mount	II LOWB ing	AY, TWT0	471W									
			NESPOT ace moun	II LOWBA	AY, TWT9	271W									
					<b>ISPOT, T</b> ss mountin	<b>NT9771N</b> 9	/								
					ID ZONE ce mounti		r, TWT327	71W							
							ONESPO urface mou		AY, TWT	9371W					
							<b>AFE 6, TV</b> eiling, wall			separate l	ens)				
											OLID ZO urface mod	NE MIDB unting	AY, TWT3	3671W	

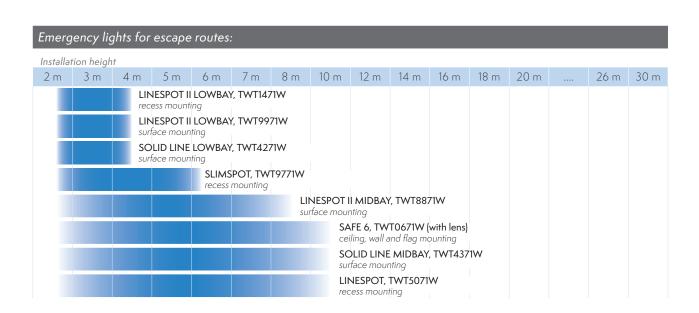

### ADDRESSABLE 230 V CENTRALLY SUPPLIED EMERGENCY LIGHTS


	ency lig tion heigh		орен с												
2 m	3 m	4 m	5 m	6 m	7 m	8 m	10 m	12 m	14 m	16 m	18 m	20 m		26 m	30 m
			NESPOT ess mount	II LOWB ing	AY, TWTC	451WK									
			NESPOT face mour	II LOWB	AY, TWT9	9251WK									
					ASPOT, T ss mountir	<b>WT9751W</b> ng	/K								
					ID ZONE	E <b>LOWBA</b> ' ing	r, TWT32.	51WK							
							NESPOT face mour	II MIDBA nting	Y, TWT9.	351WK					
							ISPOT, T\	<b>NT7651W</b> ting	'K						
								T0651WK and flag mo		separate	lens)				
								SPOT, TV ess mounti		K					
									NESPOT ace mount		Y, TWT93	56WK			
											OLID ZON face mour	NE MIDBA nting	Y, TWT36	51WK	
													E 82, TW ing mount	<b>T8251Wk</b> ing	ΚH
												NESPOT II		Y TWT84	56WK

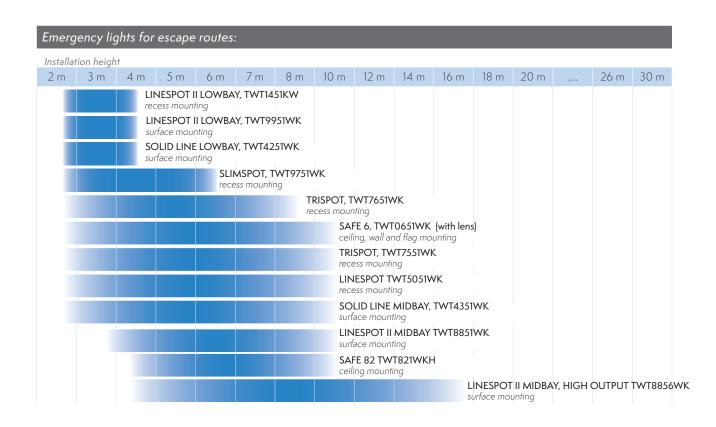

# SELECTION GUIDE FOR EMERGENCY LIGHTS ACCORDING TO INSTALLATION HEIGHT

SELF-CONTAINED EMERGENCY LIGHTS WITH 1 H OR 3 H BATTERY, SELF-TESTING AND WIRELESS CENTRAL MONITORING

Emerg	ency lig	hts for	open a	reas:											
Installat	ion heigh	t													
2 m	3 m	4 m	5 m	6 m	7 m	8 m	10 m	12 m	14 m	16 m	18 m	20 m		26 m	30 m
			NESPOT ess mount		AY, TWTC	)452WA/	M, TWT0	453WA/1	М						
	ZONESPOT II LOWBAY, TWT9252WA/M, TWT9253WA/M surface mounting														
	SAFE 6, TWT0652WA/M (without separate lens) ceiling, wall and flag mounting														
					LID ZON		Y, TWT32	252WA/N	1, TWT32	53WA/M					
					MSPOT, T ess mounti		WA/M, T	WT9753V	VA/M						
							ONESPOT		AY, TWT9	352WA/N	и, TWT93	353WA/N	1		
											DLID ZON face mou	NE MIDBA nting	Y, TWT3	652WA/N	1

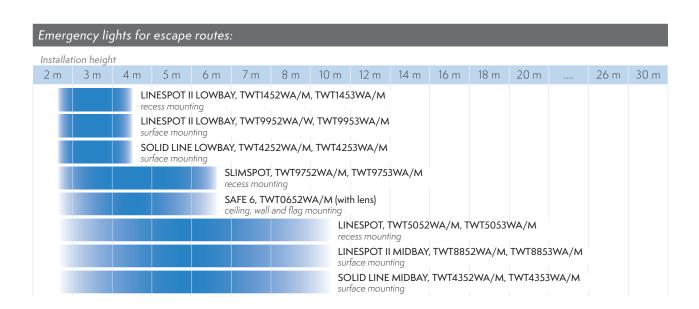

### SELF-CONTAINED EMERGENCY LIGHTS WITH SUPER CAPACITOR, SELF-TESTING AND WIRELESS CENTRAL MONITORING

Emergency lights for open areas:															
Installation height															
2 m	3 m	4 m	5 m	6 m	7 m	8 m	10 m	12 m	14 m	16 m	18 m	20 m		26 m	30 m
		SPOT, TV	9		(60.400)										
	ZONESPOT II LOWBAY, TWS0492WA/M recess mounting														
		ZONESP surface m	OT II LOV	WBAY, TV	VS9292W	/A/M									
		SOLID Z	ONE LOV	WBAY, TV	VS3292W	/A/M									
			ONESPO cess moun		BAY, TWS	0492WA	C, TWS04	192WMC							
			ONESPO		BAY, TWS	9292WA0	CM TWS9	292WM0							
	ZONESPOT II MIDBAY, TWS9392WA/M surface mounting														
	ZONESPOT II MIDBAY, TWS9392WAC, TWS9392WMC surface mounting														
	SOLID ZONE MIDBAY, TWS3692WA surface mounting														

Emerg	ency lig	ghts for	escape	routes	:										
Installat	Installation height														
2 m	3 m	4 m	5 m	6 m	7 m	8 m	10 m	12 m	14 m	16 m	18 m	20 m		26 m	30 m
		MSPOT, 1 ess mounti	<b>ΓWS9792</b> ing	WA/M											
	SOLID LINE LOWBAY, TWS4292WA/M surface mounting														
	LINESPOT II LOWBAY, TWS9992WA/M surface mounting														
		LINESPC recess mc	OT II LOW ounting	BAY, TWS	1492WA	/M									
			LINESPOT TWS5092WA/M recess mounting												
	SOLID LINE MIDBAY, TWS4392WA/M surface mounting														
							INESPOT urface mou		Y, TWS88	92WA/M	l				