


# P6187W

18.5" TFT Widescreen Industrial LCD Monitor

**NEW**

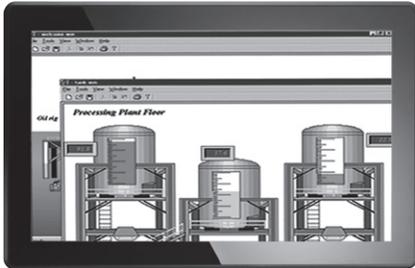

- |                 |                   |
|-----------------|-------------------|
| 1. Exit         | 7. DC power input |
| 2. Menu         | 8. T/S port       |
| 3. SEL-         | 9. DVI-D          |
| 4. SEL+         | 10. VGA           |
| 5. Power LED    | 11. Video(AV)     |
| 6. Power switch | 12. S-video       |



▲ Modularized design

## Features

- 18.5" TFT 300 nits WXGA LCD
- NEMA 4/12 (IP65)- compliant panel mounting flat panel monitor
- Supports panel mount, wall mount and VESA mount
- Multi touch 18.5" projective capacitive
- Supports full range screw-type (locked) AC-in or 24V DC-in (option)
- Supports multi-signal inputs: VGA, S-video, video and DVI

## Introduction

The P6187W is an ultra slim with flat front bezel design industrial LCD monitor, which adopts 18.5-inch 300 nits WXGA LCD display and supports multi-signal interfaces including DVI, VGA, S-Video, Video. Featuring NEMA4/IP65 compliant front bezel, screw-type adaptor plug design, and 12/24V DC-In means it is fit for all kinds of industrial environments. Moreover, the P6187W supports panel, wall or VESA FPMPMI (Video Electronics Standards Association Flat Panel Monitor Physical Mounting Interface) mounting. With the compact mechanism design, users can enjoy free from space constraint. It is especially suitable for POI/POS, excellent HMI and all kinds of heavy-duty industrial fields.

## Specifications

Front Bezel	NEMA 4/12 (IP65)-compliant, flat front bezel	
Mounting	Panel mounting, wall mounting, VESA FPMPMI mounting (video electronics standards association Flat Panel monitor physical mounting interface)	
LCD Panel	Display	18.5" TFT LCD
	Max. Resolution	1366 x 768
	Max. Colors	16.7M
	Active Area (mm)	409.8 x 230.4
	Pixel Pitch (mm)	0.3 x 0.3
	Response Time	5ms
	Backlight	LED
	Backlight MTBF	50,000 hrs
	Viewing Angle (H/V)	170°/160°
	Contrast Ratio	1000 (TYP.)
	Brightness (cd/m <sup>2</sup> )	300 nits
Display Control	OSD (on screen display)	
Display Mode	VGA 640 x 350 (70Hz), VGA 720 x 400 (70Hz), VGA 640 x 480 (60/72/75Hz), SXGA 800 x 600 (60/72/75Hz), XGA 1024 x 768 (60/72/75Hz) WXGA 1366 x 768 (60Hz)	

\* All specifications and photos are subject to change without notice.

## Specifications

Input Signal	VGA Video: R.G.B Analog 0.7v Peak-to-Peak Video S-Video DVI Touchscreen: USB interface
I/O Connectors	1 x USB for touchscreen version 1 x VGA input 1 x RCA for video 1 x S-Video for video 1 x DVI 1 x Screw-type DC power input
Power Adapter	Screw-type external AC / DC power adapter
Touchscreen	Multi touch 18.5" projective capacitive
Dimensions	460 mm (18.11") (W) x 57 mm (2.44") (D) x 285 mm (11.22") (H)
Packing Dimensions	595 mm (24.43") (W) x 190 mm (7.48") (D) x 490 mm (19.29") (H)
Weight (net/gross)	TBD
Environment	Operating temperature: 0° ~ +55°C (+32°F ~ +131°F) Storage temperature: -20°C ~ +60°C (-4°F ~ +140°F) Relative humidity: 20% ~ 90%, non-condensing
Certification	CE

## Ordering Information

P6187W		
AC Power	Panel Mount Monitor	
	Capacitive (USB)	P6187W-AC-U
	Glass	P6187W-AC
24VDC Power	Panel Mount Monitor	
	Capacitive (USB)	P6187W-24VDC-U
	Glass	P6187W-24VDC

Overview

Industrial Panel Computers & Monitors

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories

## Dimensions

