


W4S-3 Inox Hygiene – highest reliability, maximum resistance and endless possibilities



Stainless Steel



Additional information

Detailed technical data. 37
 Ordering information. 38
 Dimensional drawings 40
 Connection type and diagram 44
 Sensing distance. 46
 Sensing range 48
 Operating reserve 49
 Accessories 58
 Special reflectors. 62

Product description

The W4S-3 Inox Hygiene product family of photoelectric sensors combines hygienic requirements with best-in-class performance. These sensors are completely enclosed in a stainless steel housing and can be taught via a stainless steel teach-in button with a stainless steel membrane, an external

teach wire or IO-Link. With built-in protection for the sensor cable, no additional mounting brackets or mounting holes are required for in-process machine integration. These sensors are designed for a completely hygienic sensor solution that is a necessity for the most hygienic machines.

At a glance

- Smooth stainless steel housing (316L/1.4404)
- Hygienic mounting using M12-adapt-er thread or D12-adapt-er shaft
- IP 66, IP 67, IP 68 and IP 69K enclosure rating and Ecolab certified

- Resistant to a variety of common cleaning and disinfection agents
- PinPoint LED technology provides a highly visible laser-like light spot
- Teach-in via stainless steel pushbutton with a metal membrane

Your benefits

- Smooth hygienic housing and accessories with no grooves or crevices eliminates the potential for bacteria to grow, providing a more hygienic solution.
- Long service life in harsh conditions ensures less downtime and fewer replacement costs
- Easy adjustment via a stainless steel metal membrane teach-in pushbutton
- Quick and easy alignment due to highly visible PinPoint emitter LED
- Remote monitoring and quick diagnostics via IO-Link (optional)

Detailed technical data

	WTB4S-3H	WTF4S-3H	WL4S-3H	WSE4S-3H
Light spot (distance)	Ø 6.5 mm (150 mm) ¹⁾ Ø 2.5 mm (100 mm) ²⁾ Ø 2.5 mm (50 mm) ³⁾	Ø 6.5 mm (150 mm)	Ø 45 mm (1.5 m)	Ø 130 mm (2 m)
Housing design (light emission)	Cuboid, slim			
Light source ⁴⁾	PinPoint LED			
Type of light	Visible red light			
Wavelength	650 nm			
Teach-in	Single teach-in button and/or teach-in via cable ⁵⁾			-

¹⁾ At sensing distance max. ≤ 500 mm.
²⁾ At sensing distance max. ≤ 280 mm.
³⁾ At sensing distance max. ≤ 120 mm.
⁴⁾ Average service life 100,000 h at T_A = +25 °C.
⁵⁾ setting via cable (ET): connect white cable or PIN to L+ (PNP) or to M (NPN) in line with the desired sensitivity > 2 ... < 8 s or > 8 s.

Mechanics/electronics

	WTB4S-3H	WTF4S-3H	WL4S-3H	WSE4S-3H
Supply voltage	10 V DC ... 30 V DC ¹⁾			
Residual ripple ²⁾	< 5 V _{pp}			
Power consumption	≤ 30 mA ³⁾			≤ 20 mA ⁴⁾
Output current I _{max}	≤ 100 mA			
Response time ⁵⁾	< 0.5 ms			
Switching frequency ⁶⁾	1,000 Hz			
Connection type ⁷⁾	Connector Cable with plug, 150 mm, PVC Cable, 2 m, PVC, 0.14 mm ² (depending on type)	Cable with plug, 150 mm, PVC	Connector Cable with plug, 150 mm, PVC Cable, 2 m, PVC, 0.14 mm ² (depending on type)	
Circuit protection	A ⁸⁾ B ⁹⁾ C ¹⁰⁾			
Protection class	III			
Weight	Cable with plug, M8 Connector M8 Cable	50 g - -	50 g - -	50 g 140 g ¹¹⁾ 80 g / 125 g ¹²⁾
Polarisation filter	-		I	-
IO-Link	COM2			
Housing material	Stainless steel 316L/V4A			
Enclosure rating	IP 66 / IP 67 / IP 68 / IP 69K ¹³⁾ (depending on type)	IP 66 / IP 67 / IP 68 / IP 69K ¹³⁾	IP 66 / IP 67 / IP 68 / IP 69K ¹³⁾ (depending on type)	IP 66 / IP 67 / IP 68 / IP 69K ¹³⁾
Test input sender off	-			TE to 0 V
Ambient temperature, operation	-30 °C ... +70 °C ¹⁴⁾ -30 °C ... +60 °C			
Ambient temperature, storage	-30 °C ... +75 °C			

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network, max. 8 A.
²⁾ Limit values, operation in short-circuit protected network max. 8 A.
³⁾ May not exceed or fall short of V_S.
⁴⁾ Without load.
⁵⁾ Sender.
⁶⁾ Signal transit time with resistive load.
⁷⁾ With light/dark ratio 1:1.
⁸⁾ Do not bend below 0 °C.
⁹⁾ A = V_S connections reverse-polarity protected.
¹⁰⁾ B = inputs and outputs reverse-polarity protected.
¹¹⁾ C = interference suppression.
¹²⁾ Version with mechanical connection D12 adapter shaft.
¹³⁾ Special version, sensor with cable, 5m.
¹⁴⁾ At V_S ≤ 24 V and I_A < 30 mA.

Ordering information

WTB4S-3H

- **Sensor principle:** photoelectric proximity sensor
- **Detection principle:** background suppression

Sensing range max.	Sensing range	Switching output	Switching mode	Adjustment	IO-Link	Mechanical connection	Electrical connection	Model name	Part no.
≤ 500 mm ¹⁾	10 ... 350 mm ¹⁾	PNP	Light-switching	Cable	-	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4S-3P3265H	1048102
				Teach, cable	-	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4S-3P3264H	1048047
			Complementary	Teach	-	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4S-3P3262H	1048094
				Teach, cable	I	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4SC-3P3262H	1048108
		NPN	Light-switching	Cable	-	M12 adapter threads	Cable, 4-wire	WTB4S-3N1165H	1048107
			Complementary	Teach	-	M12 adapter threads	Cable, 4-wire	WTB4S-3N1162H	1048095
≤ 280 mm ¹⁾	10 ... 150 mm ¹⁾	PNP	Light-switching	Teach, cable	-	D12 adapter shaft	Cable with plug, M8, 4-pin	WTB4S-3P5204HS02	1054865
≤ 120 mm ¹⁾	10 ... 120 mm ¹⁾	PNP	Light-switching	Cable	-	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4S-3P3235H	1048100
				Teach, cable	-	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4S-3P3234H	1048097
			Complementary	Teach	-	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4S-3P3232H	1048096
					I	M12 adapter threads	Connector M8, 4-pin	WTB4S-3P5232H	1054864
		NPN	Light-switching	Cable	-	M12 adapter threads	Cable, 4-wire	WTB4S-3N1135H	1048101
				Teach	-	M12 adapter threads	Cable, 4-wire	WTB4S-3N1132H	1048098
			Complementary	Teach	-	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4SC-3P3232H	1048099
					I	M12 adapter threads	Cable with plug, M8, 4-pin	WTB4SC-3P3232H	1048099

¹⁾ Object with 90 % remission (referred to standard white DIN 5033).

WTF4S-3H

- **Sensor principle:** photoelectric proximity sensor
- **Detection principle:** foreground suppression

Sensing range max.	Switching output	Switching mode	Adjustment	Mechanical connection	Electrical connection	Model name	Part no.
≤ 200 mm	PNP	Light-switching	Teach, cable	M12 adapter threads	Cable with plug, M8, 4-pin	WTF4S-3P3264H	1048109

WL4S-3H

- **Sensor principle:** photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Switching mode:** complementary

Sensing range max.	Sensing range	Switching output	Adjustment	Alarm output	Mechanical connection	Electrical connection	Model name	Part no.
≤ 4 m	0 ... 2,5 m ¹⁾	PNP	-	-	M12 adapter threads	Cable with plug, M8, 4-pin	WL4S-3P3230H	1048115
					D12 adapter shaft	Cable with plug, M8, 4-pin	WL4S-3P5230H	1057052
		NPN	-	-	M12 adapter threads	Cable, 4-wire	WL4S-3N1130H	1048116
					M12 adapter threads	Cable with plug, M8, 4-pin	WL4S-3V3232H	1048118
≤ 5 m	0 ... 3 m ¹⁾	PNP	Teach	I	M12 adapter threads	Cable with plug, M8, 4-pin	WL4S-3V3232H	1048118
					M12 adapter threads	Cable with plug, M8, 4-pin	WL4S-3P3232H	1048117
		NPN	Teach	-	M12 adapter threads	Cable, 4-wire	WL4S-3N1132H	1048119
					M12 adapter threads	Cable, 4-wire	WL4S-3N1132H	1048119

¹⁾ Relating to the reflector PL80A.


WSE4S-3H

- **Sensor principle:** Through-beam photoelectric sensor
- **Sensing range max.:** ≤ 5 m
- **Adjustment:** no adjustment possibility

Switching output	Switching mode	Connection	Model name	Part no.
PNP	Dark-switching	Cable with plug, M8, 3-pin	WSE4S-3F3130H	1052888
	Light-switching	Cable with plug, M8, 3-pin	WSE4S-3P3130H	1052882
	Complementary	Cable with plug, M8, 4-pin	WSE4S-3P5230H	1054896
NPN	Dark-switching	Cable, 3-wire	WSE4S-3E1330H	1052873
		Cable with plug, M8, 3-pin	WSE4S-3E3130H	1052868
	Light-switching	Cable, 3-wire	WSE4S-3N1330H	1052870


Dimensional drawings

WTB4S-3H, WTF4S-3H, with single teach-in button

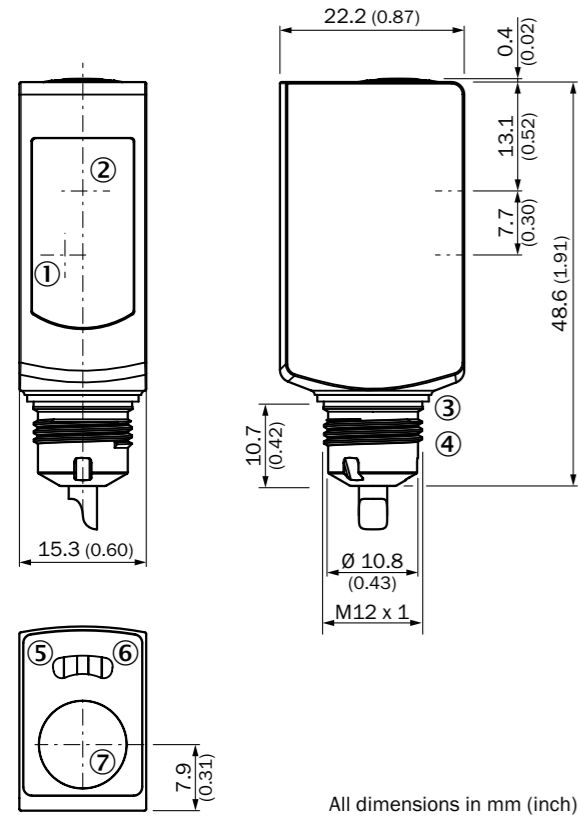

All dimensions in mm (inch)


- ① Center of optical axis, receiver
- ② Center of optical axis, sender
- ③ Gasket (tightening torque 6 Nm)
- ④ Connection M12 plug
- ⑤ Status indicator LED, yellow: status of received light beam
- ⑥ Status indicator LED green: power on
- ⑦ Teach-in button

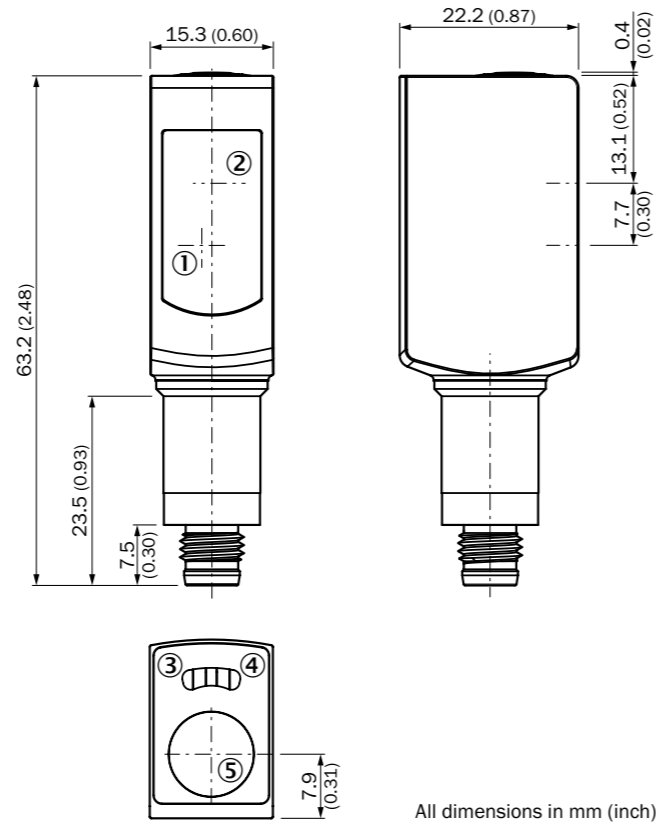

All dimensions in mm (inch)


- ① Center of optical axis, receiver
- ② Center of optical axis, receiver
- ③ Status indicator LED, yellow: status of received light beam
- ④ Status indicator LED green: power on
- ⑤ Teach-in button

WTB4S-3H, WTF4S-3H, no single teach-in button

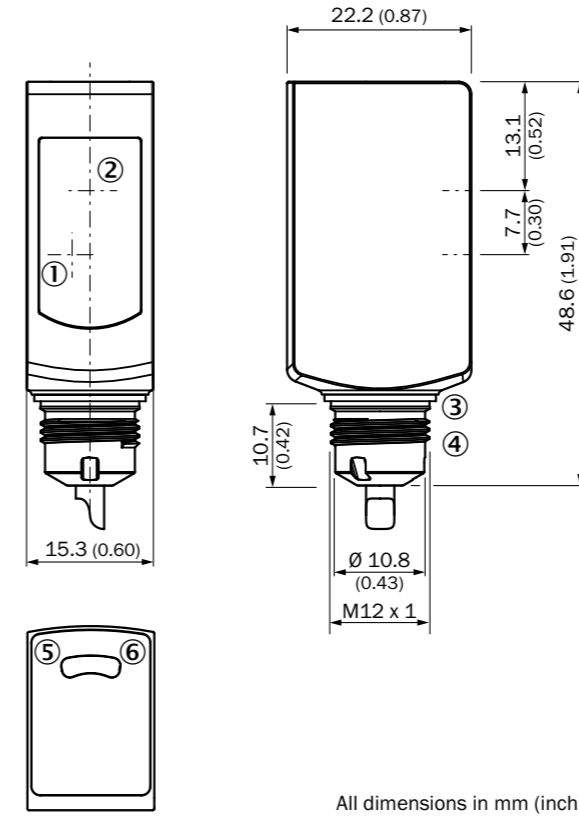

All dimensions in mm (inch)


- ① Center of optical axis, receiver
- ② Center of optical axis, sender
- ③ Gasket (tightening torque 6 Nm)
- ④ Connection M12 plug
- ⑤ Status indicator LED, yellow: status of received light beam
- ⑥ Status indicator LED green: power on

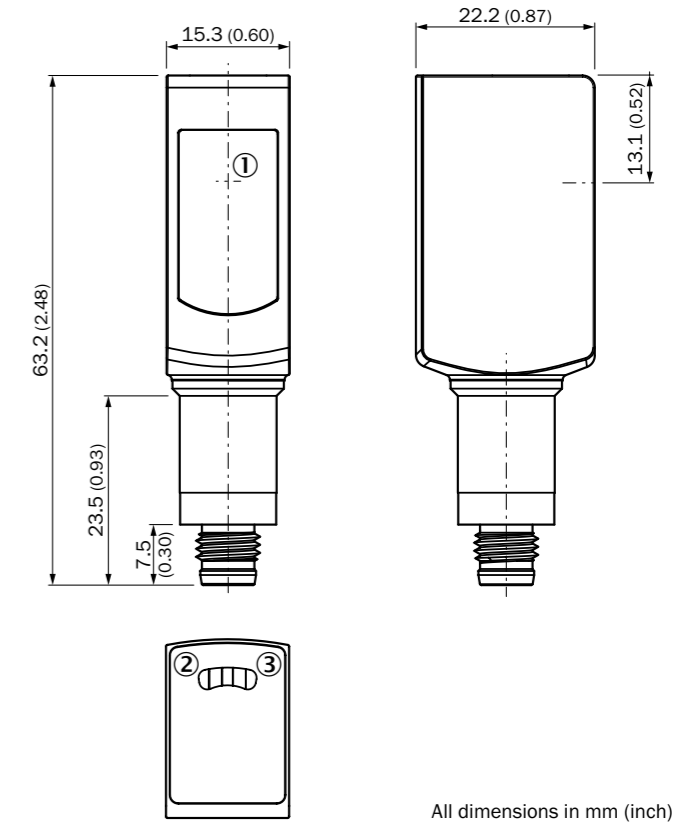

All dimensions in mm (inch)

- ① Center of optical axis
- ② Status indicator LED, yellow: status of received light beam
- ③ Status indicator LED green: power on


WL4S-3H, WLG4S-3H, with single teach-in button

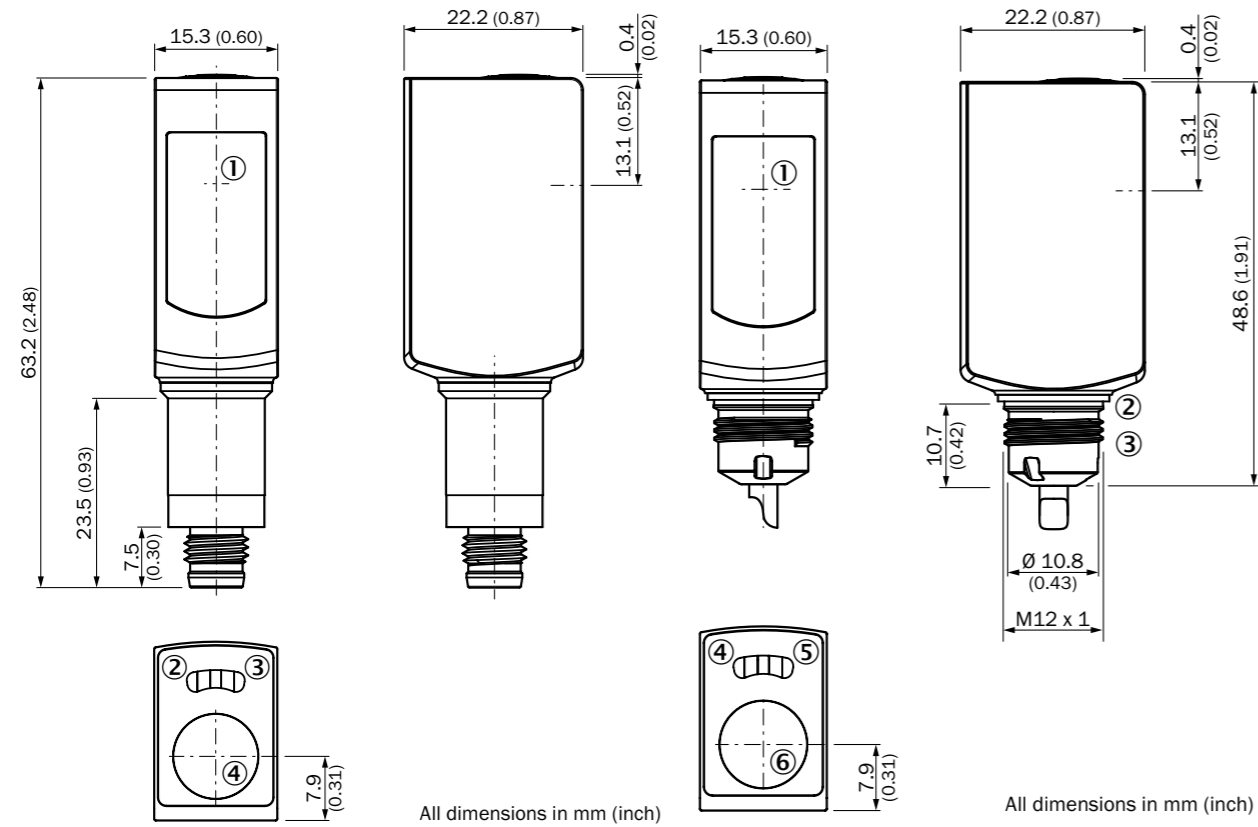

- ① Center of optical axis
- ② Status indicator LED, yellow: status of received light beam
- ③ Status indicator LED green: power on
- ④ Teach-in button

- ① Center of optical axis
- ② Gasket (tightening torque 6 Nm)
- ③ Connection M12 plug
- ④ Status indicator LED, yellow: status of received light beam
- ⑤ Status indicator LED green: power on
- ⑥ Teach-in button

WL4S-3H, WLG4S-3H, WSE4S-3H, no single teach-in button

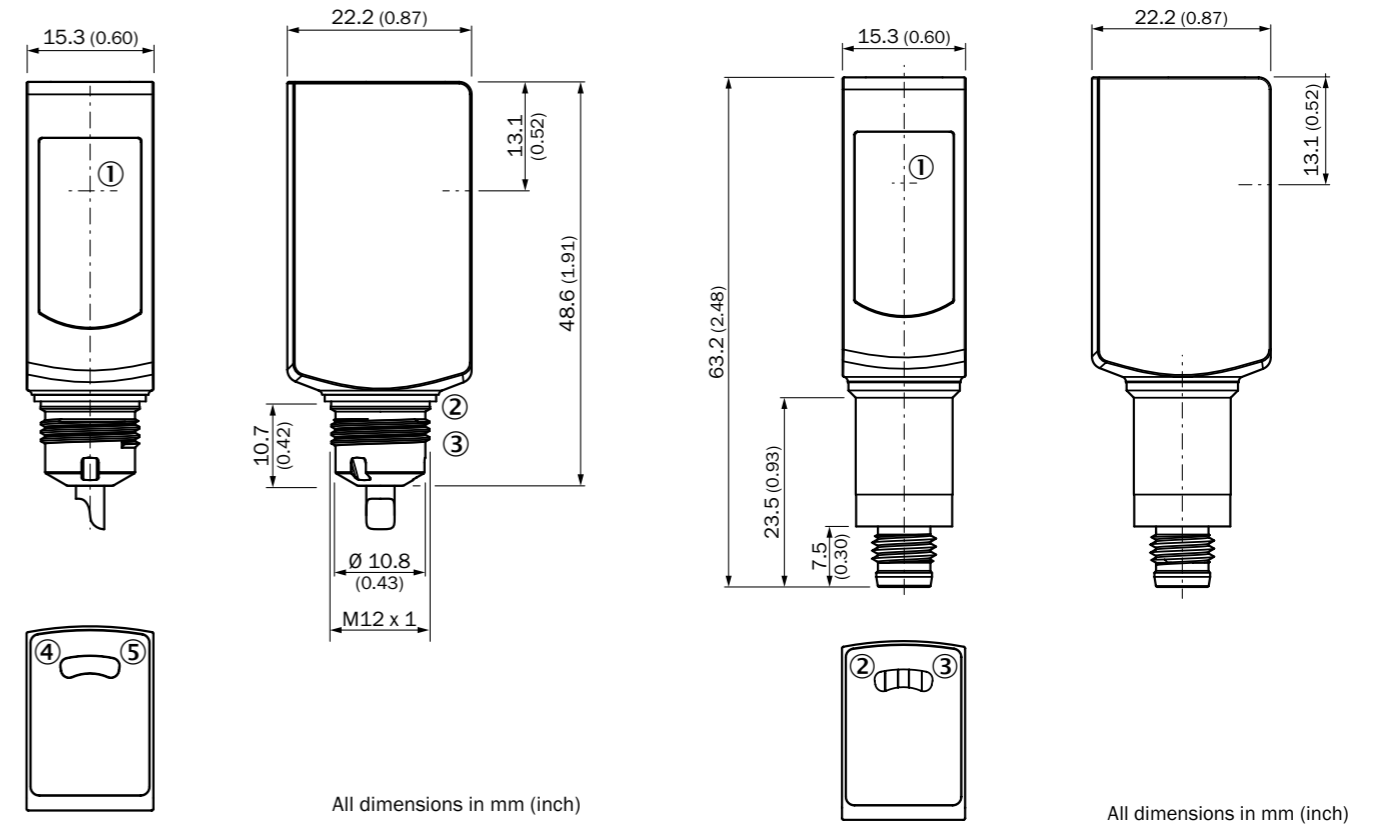



- ① centre of optical axis, sender (WS) and receiver (WE)
- ② Gasket (tightening torque 6 Nm)
- ③ Connection M12 plug
- ④ Status indicator LED, yellow: status of received light beam
- ⑤ Status indicator LED green: supply voltage active

- ① Center of optical axis
- ② Status indicator LED, yellow: status of received light beam
- ③ Status indicator LED green: power on



Connection type and diagram

WTB4-3H, WTF4S-3H, WL4S-3H, WLG4S-3H, WSE4S-3H



Teach-in via cable





Single teach-in button or fix adjustment





Single teach-in button + IO-Link





Teach-in via cable





Single teach-in button or fix adjustment





Single teach-in button + IO-Link





Single teach-in button + alarm output





Fix adjustment + Test input





Teach-in via cable





Single teach-in button or fix adjustment



Fix adjustment + Test input




Fix adjustment + Test input

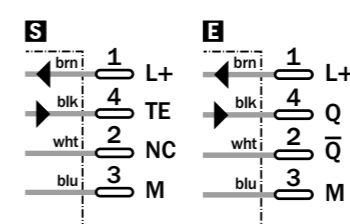

S Sender
E Receiver

Sensing distance


WTB4S-3, sensing distance, 500 mm

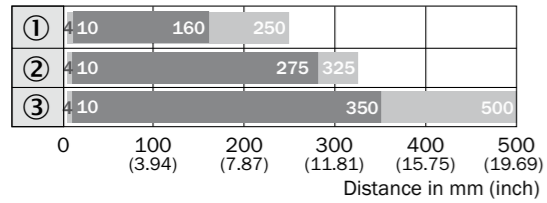


■ Operating distance ■ Sensing distance typ. max.

- ① Sensing distance on black, 6 % remission
- ② Sensing distance on grey, 18 % remission
- ③ Sensing distance on white, 90 % remission

WTB4S-3, sensing distance, 500 mm

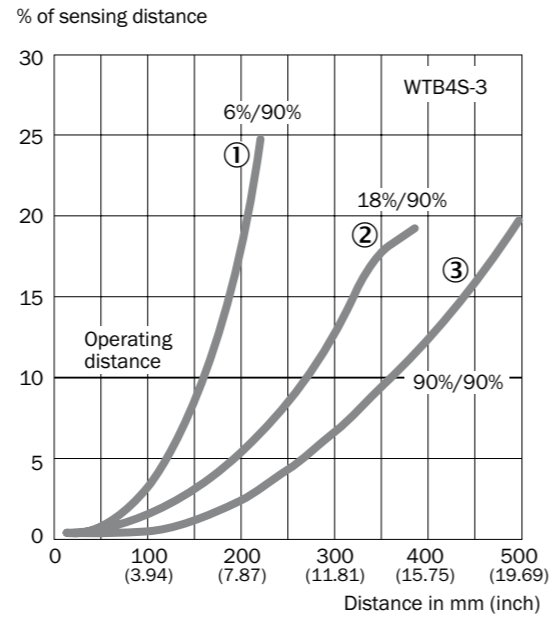


WTB4S-3, sensing distance, 120 mm

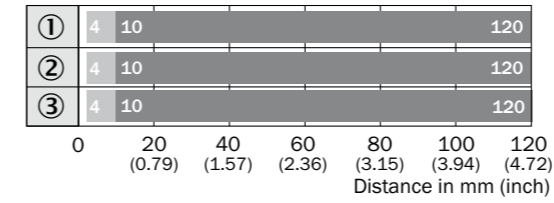


■ Operating distance ■ Sensing distance max. typ.

- ① Sensing distance on black, 6 % remission
- ② Sensing distance on grey, 18 % remission
- ③ Sensing distance on white, 90 % remission

WTB4S-3, sensing distance, 120 mm

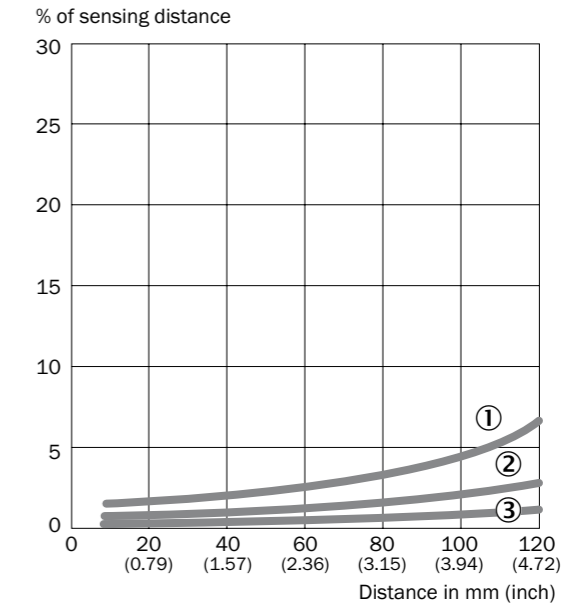

WTB4S-3, sensing distance, 280 mm

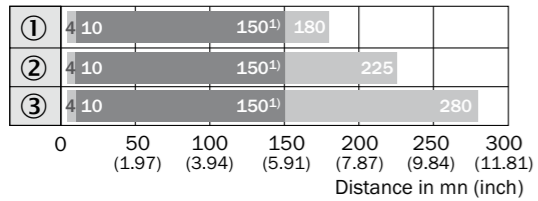


■ Operating distance ■ Sensing distance typ. max.

- ① Sensing distance on black, 6 % remission
- ② Sensing distance on grey, 18 % remission
- ③ Sensing distance on white, 90 % remission


¹⁾ Due to the focus of the light spot at 100 mm (3.94 inch)

WTB4S-3, sensing distance, 280 mm

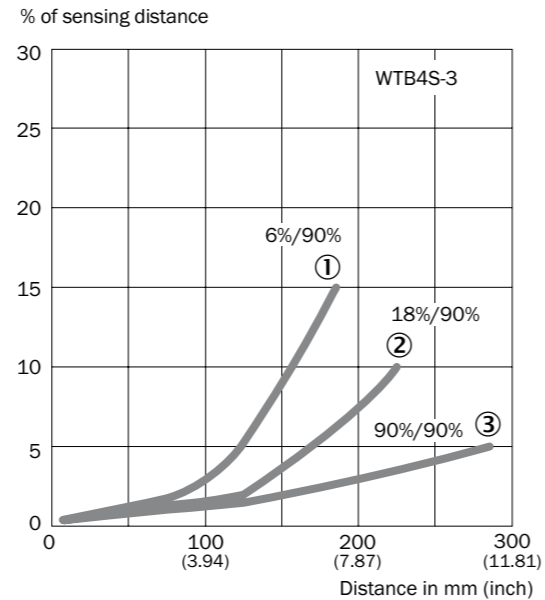

Sensing range


WL4S-3, WLG4S-3, sensing range 4 m

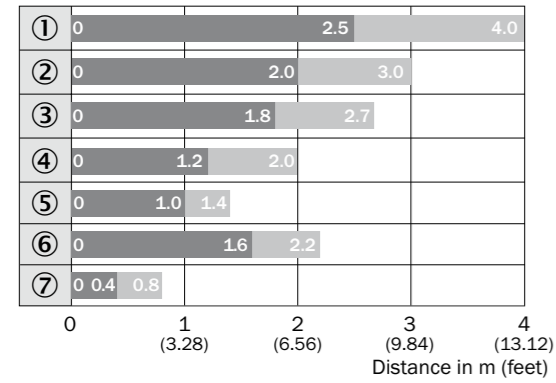

■ Operating range ■ Sensing range typ. max.


- ① Reflector type PL80A
- ② Reflector type PL250F
- ③ Reflector type PL40A
- ④ Reflector type PL20A
- ⑤ Reflector type PL10F
- ⑥ Reflector type P250 CHEM
- ⑦ Reflective tape REF-IRF-56

WSE4S-3, sensing range 5 m

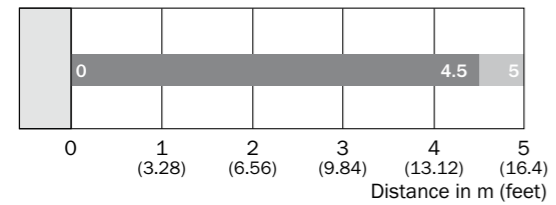

■ Operating range ■ Sensing range typ. max.

WL4S-3, WLG4S-3, sensing range 5 m

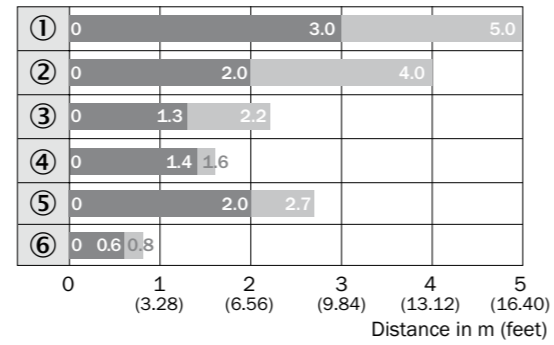


■ Operating range ■ Sensing range typ. max.

- ① Reflector type PL80A
- ② Reflector type PL40A
- ③ Reflector type PL20A
- ④ Reflector type PL10F
- ⑤ Reflector type P250 CHEM
- ⑥ Reflective tape REF-IRF-56


Operating reserve

WL4S-3, WLG4S-3, sensing range 4 m

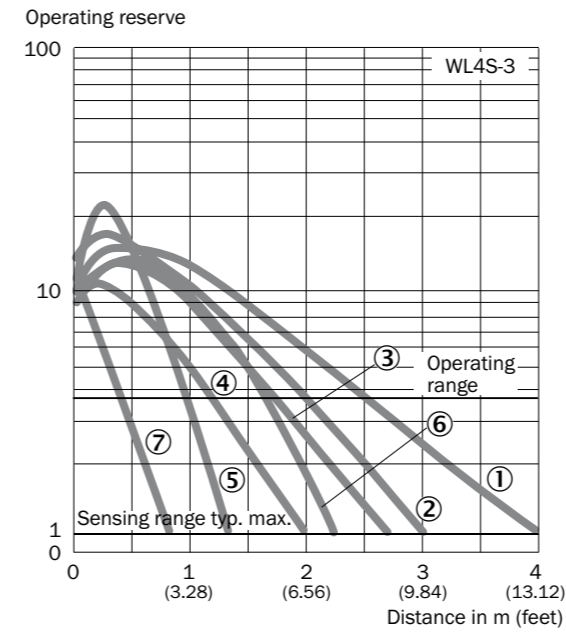


- ① Reflector type PL80A
- ② Reflector type PL250F
- ③ Reflector type PL40A
- ④ Reflector type PL20A
- ⑤ Reflector type PL10F
- ⑥ Reflector type P250 CHEM
- ⑦ Reflective tape REF-IRF-56

WL4S-3, WLG4S-3, sensing range 5 m

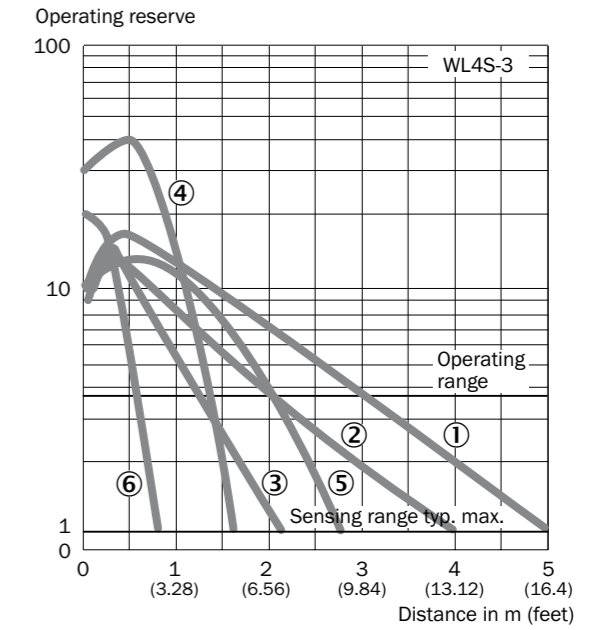

- ① Reflector type PL80A
- ② Reflector type PL40A
- ③ Reflector type PL20A
- ④ Reflector type PL10F
- ⑤ Reflector type P250 CHEM
- ⑥ Reflective tape REF-IRF-56

WSE4S-3V, WSE4S-3H

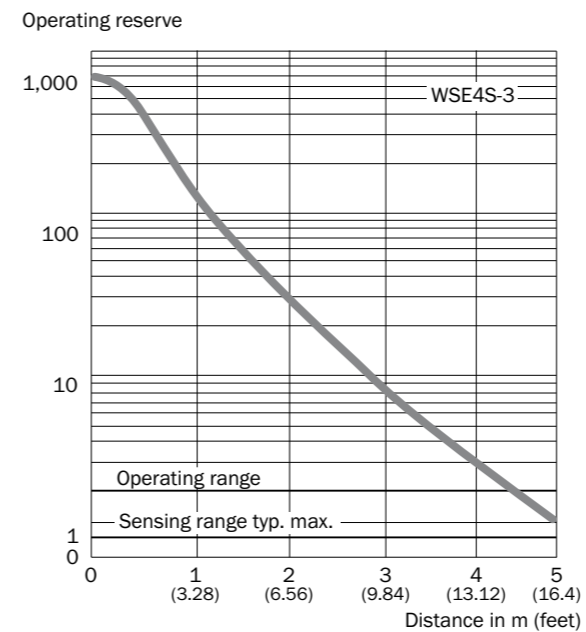

W4S-3 Inox Hygiene Glass – reliable detection of transparent objects



Stainless Steel



Product description

The WLG4S-3 Inox Hygiene photoelectric retro-reflective sensors combine strict hygiene requirements based on EHEDG with best-in-class optical performance. The continuous threshold adaptation of the switching threshold enables reliable transparent object detection and reduces the frequency that the sensor or reflector needs. Enclosed in an IP 69K stainless steel housing, these sensors

can be adjusted via a stainless steel pushbutton with a metal membrane. With built-in protection for the sensor cable, no additional mounting brackets or mounting holes are required for in-process machine integration. These sensors are designed for a completely hygienic sensor solution that is a necessity for the most hygienic machines.

At a glance

- Hygienic designed stainless steel housing and accessories (316L/1.4404)
- Hygienic mounting using M12-adapt-er thread or D12-adapt-er shaft
- IP 66, IP 67, IP 68 and IP 69K enclosure rating and Ecolab certified
- Resistant to a variety of common cleaning and disinfection agents
- PinPoint LED technology provides a highly visible laser-like light spot
- Teach-in stainless steel metal membrane or external teach-in

Your benefits

- Smooth hygienic housing and accessories with no grooves or crevices eliminates the potential for bacteria to grow, providing a more hygienic solution.
- Long service life in harsh conditions ensures less downtime and fewer replacement costs
- Reliable detection of all transparent objects in the pharmaceutical and food and beverage industries
- Quick and easy adjustment via a stainless steel metal membrane teach-in pushbutton
- Quick and easy alignment due to highly visible PinPoint emitter LED
- Remote monitoring and fast diagnostics via IO-Link (optional)

Detailed technical data

Light spot (distance)	Ø 45 mm (1.5 m)
Sensing range ¹⁾	0 m ... 3 m
Signal attenuation min.	8%
Housing design (light emission)	Cuboid, slim
Light source ²⁾	PinPoint LED
Type of light	Visible red light
Wavelength	650 nm
Teach-in	Single teach-in button and/or teach-in via cable ³⁾

¹⁾ PL80A.

²⁾ Average service life 100,000 h at T_A = +25 °C.

³⁾ setting via cable (ET): connect white cable or PIN to L+ (PNP) or to M (NPN) in line with the desired sensitivity > 2 ... < 8 s or > 8 s.

Mechanics/electronics

Supply voltage ¹⁾	10 V DC ... 30 V DC
Residual ripple ²⁾	< 5 V _{pp}
Power consumption ³⁾	≤ 30 mA
Output current I _{max.}	≤ 100 mA
Response time ⁴⁾	< 0.5 ms
Switching frequency ⁵⁾	1,000 Hz
Connection type ⁶⁾	Connector Cable with plug, 4-pin, 150 mm, PVC Cable, 4-wire, 2 m, PVC, 0.14 mm ² (depending on type)
Circuit protection	A ⁷⁾ B ⁸⁾ C ⁹⁾
Protection class	III
Weight	Cable with plug, M8, 4-pin 50 g Cable, 4-wire 80 g Connector, M8, 4-wire 140 g ¹⁰⁾
Polarisation filter	I
Housing material	Edelstahl 316L/V4A
Enclosure rating	IP 66, IP 67, IP 68, IP 69K ¹¹⁾
Ambient temperature, operation	-30 °C ... +70 °C ¹²⁾ -30 °C ... +60 °C
Ambient temperature, storage	-30 °C ... +75 °C

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network, max. 8 A.

²⁾ May not exceed or fall short of V_S.

³⁾ Without load.

⁴⁾ Signal transit time with resistive load.

⁵⁾ With light/dark ratio 1:1.

⁶⁾ Do not bend below 0 °C.

⁷⁾ A = V_S connections reverse-polarity protected.

⁸⁾ B = inputs and outputs reverse-polarity protected.

⁹⁾ C = interference suppression.

¹⁰⁾ Version with mechanical connection D12 adapter shaft.

¹¹⁾ Only in case of correctly mounted IP 69K connecting cable.

¹²⁾ At V_S ≤ 24 V and I_A < 30 mA.


Ordering information

- **Sensor principle:** photoelectric retro-reflective sensor
- **Detection principle:** autocollimation
- **Sensing range max.:** ≤ 5 m

Switching output	Switching mode	Adjustment	Alarm output	Mechanical connection	Electrical connection	Model name	Part no.
PNP	Complementary	Teach	-	M12 adapter threads	Cable with plug, M8, 4-pin	WLG4S-3P3232H	1048120
			-	M12 adapter threads	Cable with plug, M8, 4-pin	WLG4S-3P5232H	1057053
	Dark-switching	Teach, cable	-	D12 adapter shaft	Cable with plug, M8, 4-pin	WLG4S-3F3234H	1048121
		Teach	-	M12 adapter threads	Cable with plug, M8, 4-pin	WLG4S-3V3232H	1048122
		Teach, cable	I	M12 adapter threads	Cable with plug, M8, 4-pin	WLG4S-3F3234HS01	1048535
NPN	Complementary	Teach	-	M12 adapter threads	Cable, 4-wire	WLG4S-3N1132H	1048123
	Dark-switching	Teach, cable	-	M12 adapter threads	Cable, 4-wire	WLG4S-3E1134H	1048124
		Cable	-	M12 adapter threads	Cable, 4-wire	WLG4S-3E1135H	1048126


Dimensional drawings

WL4S-3H, WLG4S-3H, with single teach-in button

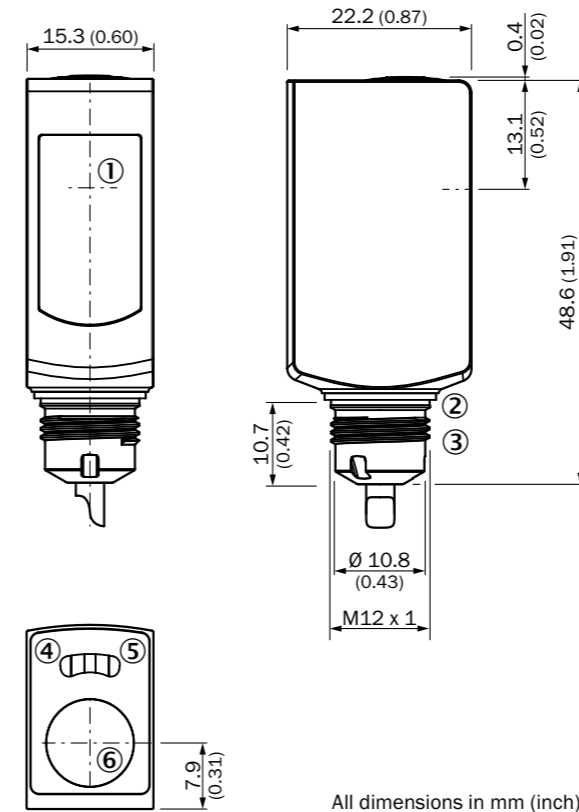

All dimensions in mm (inch)

- ① Center of optical axis
- ② Gasket (tightening torque 6 Nm)
- ③ Connection M12 plug
- ④ Status indicator LED, yellow: status of received light beam
- ⑤ Status indicator LED green: power on
- ⑥ Teach-in button

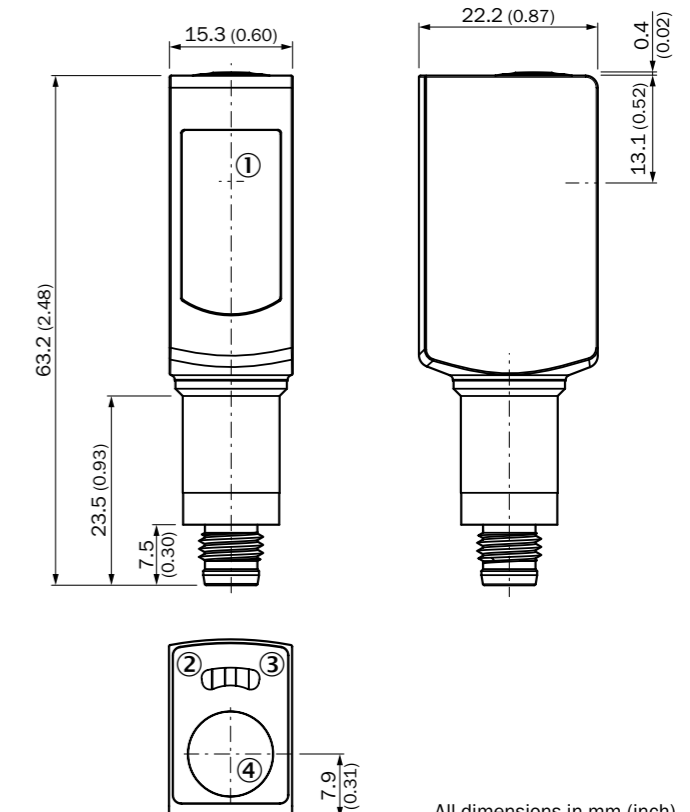



All dimensions in mm (inch)

- ① Center of optical axis
- ② Status indicator LED, yellow: status of received light beam
- ③ Status indicator LED green: power on
- ④ Teach-in button



Connection type and diagram

WLG4S-3H



Teach-in via cable





Single teach-in button or fix adjustment





Single teach-in button + IO-Link





Teach-in via cable





Single teach-in button or fix adjustment





Single teach-in button + IO-Link





Single teach-in button + alarm output



Teach-in via cable




Single teach-in button or fix adjustment



Sensing range

WL4S-3, WLG4S-3, sensing range 5 m

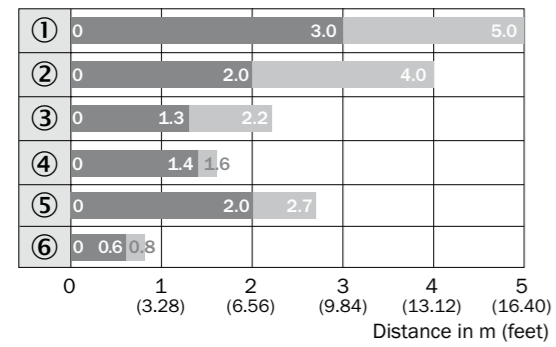


■ Operating range ■ Sensing range typ. max.

- ① Reflector type PL80A
- ② Reflector type PL40A
- ③ Reflector type PL20A
- ④ Reflector type PL10F
- ⑤ Reflector type P250 CHEM
- ⑥ Reflective tape REF-IRF-56

Operating reserve

WL4S-3, WLG4S-3, sensing range 5 m

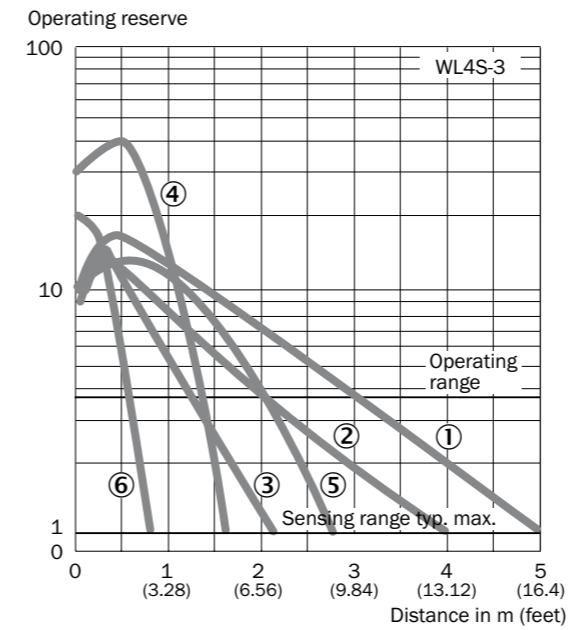




- ① Reflector type PL80A
- ② Reflector type PL40A
- ③ Reflector type PL20A
- ④ Reflector type PL10F
- ⑤ Reflector type P250 CHEM
- ⑥ Reflective tape REF-IRF-56

Accessories







Tube base

Mounting system type	Model name	Part no.	W4S-3 Inox	W4S-3 Inox Glass	W4S-3 Inox Hygiene	W4S-3 Inox Hygiene Glass
Tube base	BEF-MR18G-NA	4065853	-	-	●	●

Mounting brackets/plates

Figure	Mounting system type	Description	Material	Model name	Part no.	W4S-3 Inox	W4S-3 Inox Glass	W4S-3 Inox Hygiene	W4S-3 Inox Hygiene Glass
	Protective housings	Protective housings floor mounted	Stainless steel (1.4571)	BEF-SW-W4S	2051497	●	●	-	-
	Mounting bracket	Mounting Brackets wall mounted	Stainless steel (1.4571)	BEF-W4-A	2051628	●	●	-	-
		Mounting Brackets floor mounted	Stainless steel (1.4571)	BEF-W4-B	2051630	●	●	-	-

Terminal and alignment brackets

Figure	Mounting system type	Description	Material	Model name	Part no.	W4S-3 Inox	W4S-3 Inox Glass	W4S-3 Inox Hygiene	W4S-3 Inox Hygiene Glass
	Universal bar clamps	Universal bar clamp for sensor mounting plates	Zinc diecast	BEF-KHS-KH3	5322626	●	●	-	-
		Plate N02N for universal bar clamp	Plate: Stainless steel (1.4571), Clamp: Stainless steel (1.4408)	BEF-KHS-N02N	2051618	●	●	-	-
		Mounting rod straight	Stainless steel (1.4571)	BEF-MS12G-NA	4058914	●	●	-	-
				BEF-MS12G-NB	4058915	●	●	-	-
		Mounting rod L-shaped	Stainless steel (1.4571)	BEF-MS12L-NA	4058912	●	●	-	-
				BEF-MS12L-NB	4058913	●	●	-	-
		Mounting rod Z-shaped	Stainless steel (1.4571)	BEF-MS12Z-NA	4058916	●	●	-	-
			Steel, zinc coated	BEF-MS12Z-NB	4058917	●	●	-	-
	Rod mounting clamp	Aluminium	BEF-RMC-D12	5321878	●	●	-	-	

Plug connectors and cables

Figure	Connection type	Connector type	Enclosure rating	Flying leads	Sheath material	Cable length	Model name	Part no.						
									W4S-3 Inox	W4S-3 Inox Glass	W4S-3 Inox Hygiene	W4S-3 Inox Hygiene Glass		
	Connector M8, 3-pin	Female connector	IP 69K	Straight	PVC	2 m	DOL-0803-G02MN	6033664	●	●	●	●		
						5 m	DOL-0804-G02MN	6033670	●	●	●	●		
						10 m	DOL-0803-G10MN	6033666	●	●	●	●		
				Angled	PVC	2 m	DOL-0803-W02MN	6033667	●	●	●	●		
						5 m	DOL-0803-W05MN	6033668	●	●	●	●		
						10 m	DOL-0803-W10MN	6033669	●	●	●	●		
	Connector M8, 4-pin	Female connector	IP 69K	Straight	PVC	5 m	DOL-0804-G05MN	6033671	●	●	●	●		
						10 m	DOL-0804-G10MN	6033672	●	●	●	●		
						2 m	DOL-0804-W02MN	6033673	●	●	●	●		
				Angled	PVC	5 m	DOL-0804-W05MN	6033674	●	●	●	●		
						10 m	DOL-0804-W10MN	6033675	●	●	●	●		
						2 m	DOL-0804-W02MN	6033673	●	●	●	●		
	Connector M8, 4-pin	Female connector	IP 69K	Straight	PVC	2 m	DOL-1204-G02MN	6028128	●	●	●	●		
						5 m	DOL-1204-G05MN	6028130	●	●	●	●		
						10 m	DOL-1204-G10MN	6028132	●	●	●	●		
				Angled	PVC	2 m	DOL-1204-W02MN	6028129	●	●	●	●		
						5 m	DOL-1204-W05MN	6028131	●	●	●	●		
						10 m	DOL-1204-W10MN	6028133	●	●	●	●		
						25 m	DOL-1204-W25MN	6028135	●	●	●	●		
						Connector straight, Female connector angled	PVC	2 m	DSL-1204-B02MN	6028198	●	●	●	●
								5 m	DSL-1204-B05MN	6028199	●	●	●	●
0,6 m	DSL-1204-B0M6N	6028197	●	●	●			●						
Connector straight, Female	PVC	2 m	DSL-1204-G02MN	6028195	●	●	●	●						
		5 m	DSL-1204-G05MN	6028196	●	●	●	●						
		0,6 m	DSL-1204-G0M6N	6028194	●	●	●	●						

Special accessories

	Part no.				
		W4S-3 Inox	W4S-3 Inox Glass	W4S-3 Inox Hygiene	W4S-3 Inox Hygiene Glass
Testbox	6038940	●	●	●	●

Reflectors

Figure	Enclosure rating	Model name	Part no.				
				W4S-3 Inox	W4S-3 Inox Glass	W4S-3 Inox Hygiene	W4S-3 Inox Hygiene Glass
	IP 67: EN 60529, IP 69K: EN 40050	P250 CHEM	5321097	●	●	●	●
	IP 69K	P250H	5315124	●	●	●	●
	IP 67: EN 60529, IP 69K: EN 40050	PL10F CHEM	5321636	●	●	●	●
	IP 67: EN 60529, IP 69K: EN 40050	PL20 CHEM	5321089	●	●	●	●
	-	PL40A Antifog	5322011	●	●	●	●

PxxxCHEM – Assessment of chemical stress by TÜV Rheinland (Rhineland technical testing authority)

Liquid tested	Substance group/ component parts	Assessment after (composition, color)		
		1 day	7 days	14 days
Acetaldehyde	Aldehydes	0	0	0
Acetone	Ketones	1 (softening of surface)	1 (softening of surface)	1 (softening of surface)
Formic acid	Organic acids	0	0	0
Benzene	Aromat. hydrocarbon	0	0	1 (opacity)
1,3-Butanediol	Polyalcohols	0	0	0
Butylamine	Amines	0	0	0
Chlorobenzene	Chlor., aromat. hydrocarbon	0	0	0
Chloroform	CHC	0	0	0
Chlorosulfonic acid	Acid chlorides	0	0	0
Diesel fuel	Fuels	0	0	0
Diethyl ether	Ether	0	0	0
Dimethylformamide	Amides	0	0	0
Dimethyl sulfate	Ester	0	0	0
Glacial acetic acid	Organic acids	0	0	1 (slight fissures)
Acetic acid 10 %	Organic acids	0	0	0
Ethanol	Alcohols	0	0	1 (slight color change)
Ethylene glycol	Polyalcohols	0	0	0
Formaldehyde 37 %	Aldehydes	0	0	0
Heating oil EL	Fuels	0	0	0
Isopropanol	Alcohols	0	0	0
Kerosene	Fuels	0	0	0
m-Cresol	Phenols	0	0	0
Methanol	Alcohols	0	0	1 (opacity)
n-Heptane	hydrocarbon	0	0	0
Sodium hydroxide 10 %	Alkalis	0	0	0
Salt acid 20 %	Inorganic acids	0	0	0
Sulfuric acid 98 %	Inorganic acids	0	0	0
1, 1, 2, 2 Tetrachloroethane	Chlorinated hydrocarbon	0	0	0
Tetrachloromethane	Chlorinated hydrocarbon	0	0	0
Toluol	Aromat. hydrocarbon	0	0	0
Hydrogen peroxide (H ₂ O ₂), 10%	-	0	0	0
Cleaning agent Medicine ^a	-	0	0	0
Cleaning agent Food ^a	-	0	0	0

0 = no change

1 = slight change (description required)

2 = significant change (description required)

a = Lysoformin[®] 3000 (contents: glyoxal, glutaral, didecyl(dimethylammonium chloride)

b = Bio Tec detergent (contents: alkylbenzene sulfonate, alkyl ether sulfate)

Measured values were taken from the inspection report by TÜV Rheinland (Rhineland technical testing authority) (Test no. 620/434628).

PxxxCHEM – Resistant to ECOLAB cleaning agent

Implementation:

- Immersion of the CHEM reflectors in various cleaning solutions and concentrates
- Temperature: +60 or +80 °C
- Duration: 2 weeks
- After 2 weeks, the reflectors are rinsed with DI water and optically and gravimetrically assessed.

Product/concentration	T [°C]	Suitability
P3-cosa CIP 72	60	+
P3-cosa CIP 77	80	+
P3-cosa CIP 90	80	+
P3-cosa CIP 92	80	+
P3-cosa CIP 95	80	+
P3-cosa PUR 80	80	+
P3-cosa PUR 83	80	+
P3-cosa PUR 84	80	+
P3-cosa PUR 85	80	+
P3-cosa PUR 88	80	+
P3-cosa FOAM 40	80	+
P3-cosa DES	80	+
P3-cosa FLUX 22	80	+
P3-cosa FLUX 33	80	+
P3-cosa FLUX 44	80	+
P3-cosa FLUX 55*	80	0


+ = suitable

0 = suitable in certain conditions

- = unsuitable


* = contains nitric acid

SICK at a glance

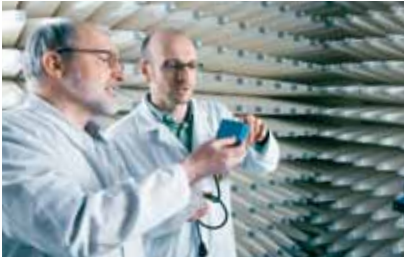

Leading technologies

With a staff of more than 5,000 and over 50 subsidiaries and representations worldwide, SICK is one of the leading and most successful manufacturers of sensor technology. The power of innovation and solution competency have made SICK the global market leader. No matter what the project and industry may be, talking with an expert from SICK will provide you with an ideal basis for your plans – there is no need to settle for anything less than the best.

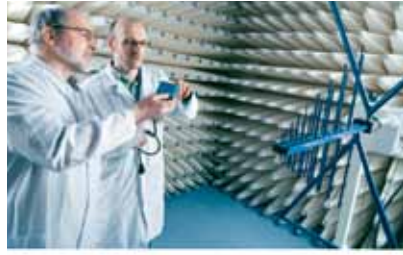

Unique product range

- Non-contact detecting, counting, classifying, positioning and measuring of any type of object or media
- Accident and operator protection with sensors, safety software and services
- Automatic identification with bar code and RFID readers
- Laser measurement technology for detecting the volume, position and contour of people and objects
- Complete system solutions for analysis and flow measurement of gases and liquids



Comprehensive services

- SICK LifeTime Services – for safety and productivity
- Application centers in Europe, Asia and North America for the development of system solutions under real-world conditions
- E-Business Partner Portal www.mysick.com – price and availability of products, requests for quotation and online orders

Worldwide presence with subsidiaries in the following countries:

Australia
Belgium/Luxembourg
Brasil
Česká Republika
Canada
China
Danmark
Deutschland
España
France
Great Britain
India
Israel
Italia
Japan

México
Nederland
Norge
Österreich
Polska
România
Russia
Schweiz
Singapore
Slovenija
South Africa
South Korea
Suomi
Sverige
Taiwan
Türkiye
United Arab Emirates
USA

Please find detailed addresses and additional representatives and agencies in all major industrial nations at www.sick.com