

ATTENUATORS, DC-40 GHz, 2.92mm (Male to Female), 25W

Model: LF-A25-XX-2.92MF-40G


ELECTRICAL SPECIFICATIONS:

Frequency Range (GHz)	DC-40GHz
Attenuation (dB):	10.....1.8/+2.2 dB
	20.....1.0/+1.5 dB
	30.....1.0/+1.5 dB
	40.....1.0/+1.5 dB
VSWR (MAX)	DC – 40GHz 1.45:.....1
Impedance	50 Ohms
RF Power Rating	25Watts Average at 25°C
PEAK: 200 Watts	(5 μSec Pulse Width ,6% Duty Cycle)

MECHANICAL SPECIFICATIONS:

Operation Temperature	-55°C - +100°C
Connectors	Passivated Stainless Steel or Brass , Gold Plated
Connector Pins	Beryllium Copper, Gold Plated
Body	Black, Finned Aluminum

OUTLINE DRAWING: Unit: mm

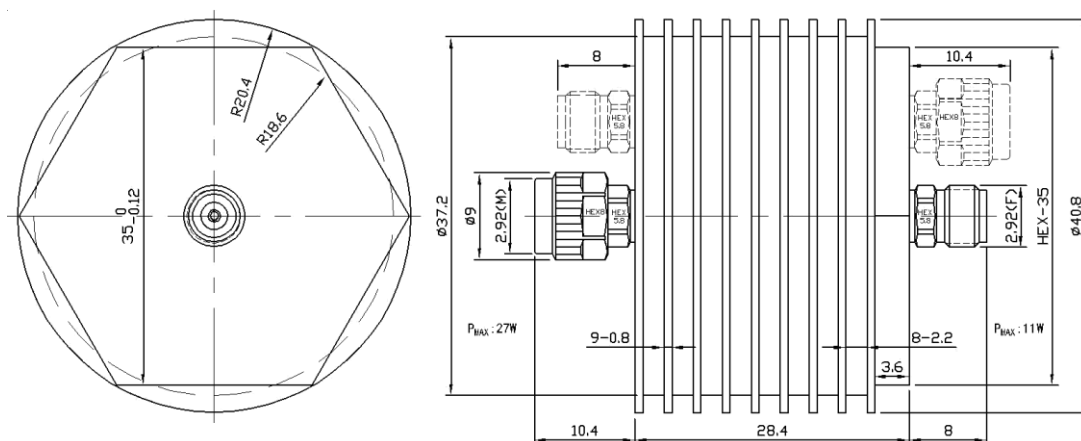

ORDERING INFORMATION:

MODEL NUMBER LF-A25-XX-2.92MF-40G

↓
dB value