





Label:


WEIGUANG® LXFFD2E133/190-M92/45-G232
220V 50Hz H:1.47A 320W 1640r/min
M:1.25A 260W 1250r/min L:1.10A 240W
1050r/min 8μF/450V CL.F XX/XX

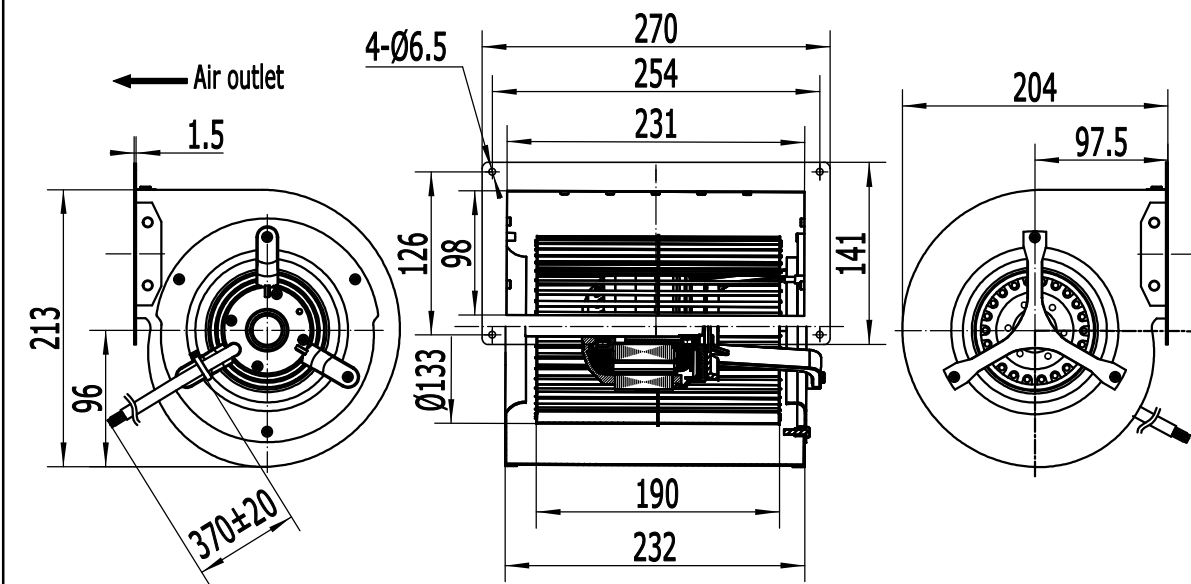

WIRING DIAGRAM

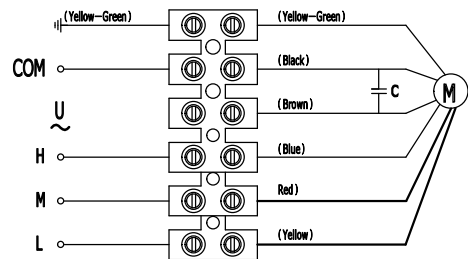

Airflow curves

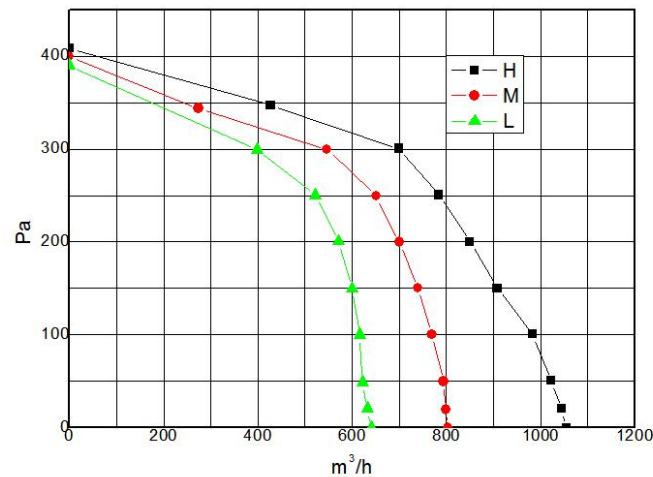

External Rotor Motor

Hangzhou Weiguang Electronic Co.,Ltd.

Unit: External Rotor Motor

Type:

Motor: Single phase motor

Customer:

Motor type:LXFFD2E133/190-M92/45-G232

Customer-type:

Voltage v	Frequency Hz	Input power W	Current A	Speed r/min	Capacitor	Remarks
220	50	320	1.47	1640	8 μF/450V	H Speed
		260	1.25	1250		M Speed
		240	1.10	1050		L Speed

Insulation class : F


Operating type: S₁

Permissible ambient temperature : -25℃ ~ 60℃

Bearings: ball bearings

Motor protection:thermocontact 150±5℃

Model meanings:

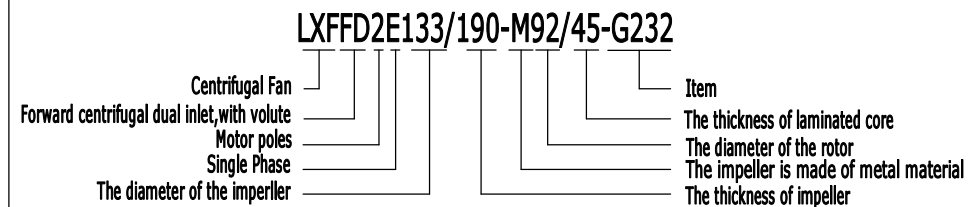

1. Electrical connection:RV-90,4G 0.50mm² lead wire Length 370mm .

2. Bearing: 608ZZ、6000ZZ.

3. All materials comply with RoHS regulations.

4. On the rotor 6-Ø5mm heat dissipation holes.

REV.	DESCRIPTION	APPROVED	DATE	DECIMAL	TOLERANCE	DRN.BY	SIGN	DATE	TITLE	PROJECTION	A4
				X	±0.5	CHD.BY			LXFFD2E133/190-M92/45-G232		SCALE
				X.X	±0.25	ENG.BY					
				X.XX	±0.15	APP.BY					
				ANGLE	±3°						SHEET:1 of 1