



# SPECIFICATION

---

**MODEL**  
**K-EC225-R230-36**

## 1.General Specification

NO.	Item	Specification	Condition
1	Model No.	K-EC225-R230-36	
2	Outline Dimension	225mm	
3	Rated Voltage	230VAC	
4	Rated Current	1.6A±10%	At Rated Voltage, 25°C, 65% RH, Free Air
5	Power Consumption	230W±10%	
6	Rotating Speed±10%	3600RPM±10%	
7	Max Airflow±10%	1353m <sup>3</sup> /h	At Rated Voltage AMCA-210-99 Standard
8	Max Static Pressure±10%	791Pa	
9	Noise Level	70dB(A)	
10	Operation mode	S1 continuous working system	
11	No. of Pole	2 Poles	
12	Rotating Direction	From the rotor end, rotate clockwise	
13	Structure type	Outer Rotor	
14	Motor Type	DC Brushless	
15	Balance	G6.3	
16	Life L <sub>10</sub> at 25°C	Greater than 25000/hrs ( Ordinary Humidity)	
17	Insulation	Class B	
18	Weight	2.3kg	

## 2.Main Materials/Parts Specification

	Materials/Parts	Specification
1	Housing	/
2	Impeller	PA6+GF
3	Bearing	NMB/NSK 6900 Z
4	Connector	N/A


## 3.Electrical Specification

	Item	Specification/Condition
1	Locked Rotor Protection	1.Auto power off after locked at rated voltage for 1 sec.
		2.After auto power off, circuit attempt to restart in 2-6 sec.
2	Polarity Protection	Open circuit when Vcc& GND are exchanged.
		Circuit won't be burned within 5 seconds when Vcc& GND are exchanged.
3	Insulation Resistance	10MΩ/Between unshielded wire and frame at 1500VAC/min.
4	Dielectric Strength	5 mA Max./Measured between lead wire(+) and frame at 1500 VAC/min.

## 4.Environmental Specification


Item		Specification/Condition
1	Operating Temp. Range	-25°C~+60°C (Normal humidity)
2	Storage Temp. Range	-25°C~+60°C (Normal humidity)

## 5.Noise Measure Condition

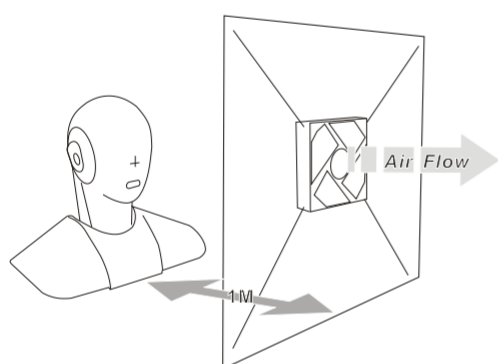


Measurement Systems
1.ANECHOIC Room Noise Measurement System.
2.Digital Head Measurement System, 16-bits version.
3.SQlab III, Mobile Multichannel Analysis System.
4.Specifications:ISO 3744, ISO 3745, ISO 7779, CNS 6753, JIS 8346
5.Background Noise: < 17dB(A)

## 6.Outline Dimension (Unit:mm)

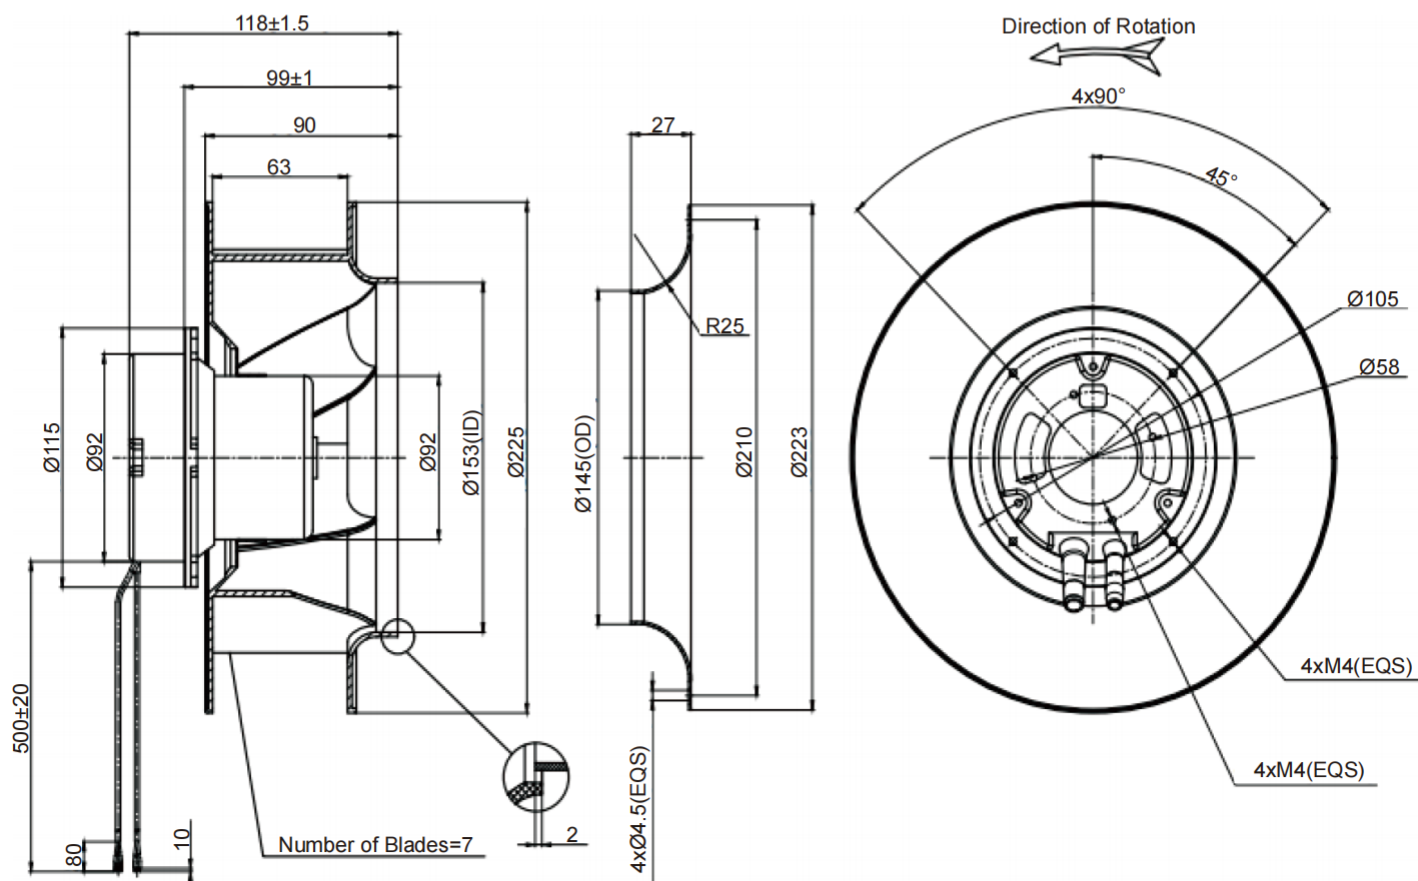

## 7.Airflow Performance

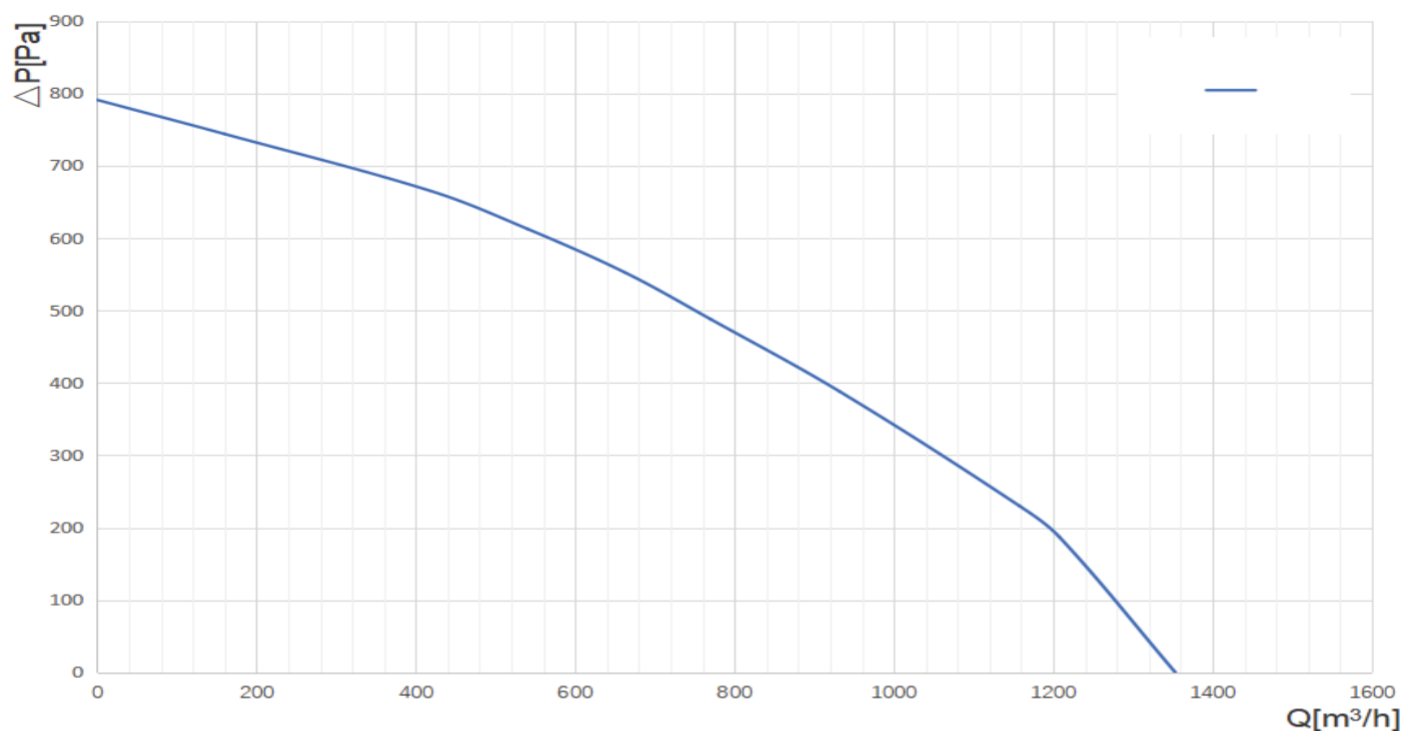


## 8.Connection

External lead wiring diagram

Colour	Blue	Brown	Yellow/Green	Red	Blue	Yellow	White
Function	L	N	PE	+10VDC Output	GND	0~10VDC PWM	FG

Speed control (0-10VDC) circuit diagram

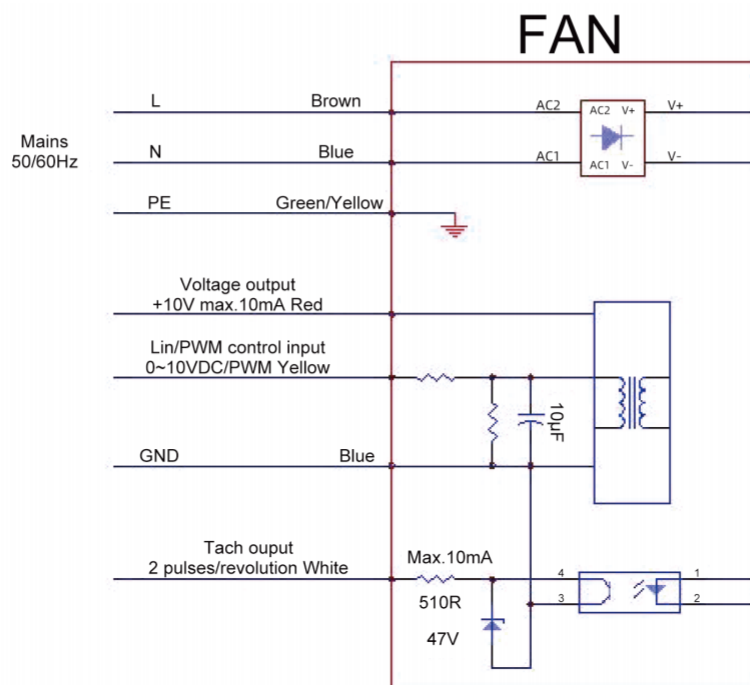

## 9.Notes

9-1.Please do not touch and push Fan Blade with fingers or others, fan blade and bearings may be damaged and it causes noise defect.

9-2.Do not carry the fan by its lead wires.

9-3.Please don't install this fan in series with 2x voltage inputs. For example, if a single fan rated at 115VAC (12VDC), then don't install two of them in series with 230VAC (24VDC) input.

9-4.Fans are not suitable to be used in an environment that contains aggressive or corrosive fluids.

9-5.Always ensure that fan is stored according to the storage temperatures specified. Do not store in an environment with a high humidity level. If the fans were stored for longer than 6 months,it is highly recommended to apply functional testing before shipping.

9-6.During installation, caution should be taken when mounting the fan. Incorrect mounting can cause excess resonance, vibration and noise.

9-7.During testing it is important to consider safety at all times. A suitable guard should be fitted to the fan to prevent personal injury.

9-8.Unless otherwise stated, all tests are carried out at relative temperature and humidity conditions of 25°C, 65%RH.