


Note (技术参数) :

1. Opening Pressure (发讯值) :1~8bar $\pm$ 10%bar 可选
2. Working Pressure (耐压值) :420bar
3. Seal (密封件材质) :NBR 70SH
4. Body (材质) :304
5. Connection (螺纹接口) :G1/2"-2A


**CM-I-G1/2-4.5bar -  
Визуальный индикатор**

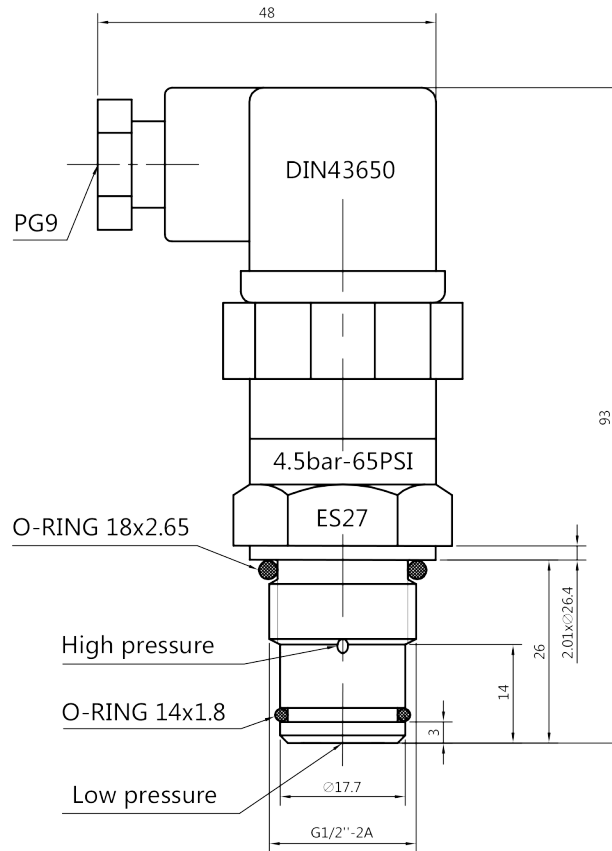


Electrical wiring diagram  
电气接线图

Note (技术参数) :


1. Opening Pressure (发讯值) : 1~8bar±10%bar
2. Working Pressure (耐压值) : 420bar
3. Seal (密封件材质) : NBR 70
4. Body (材质) : 304
5. Connection (螺纹接口) : G1/2''-2A
6. Ingress Protection (防护等级) : IP65
7. Working temperature (工作温度) : -20°C~100°C
8. Electrical characteristics (电气特性) : 250VAC 3A




- 1.COM
- 2.NC
- 3.NO
- ⊕ GND



## CS-III-G1/2-4,5 bar - Электрический индикатор

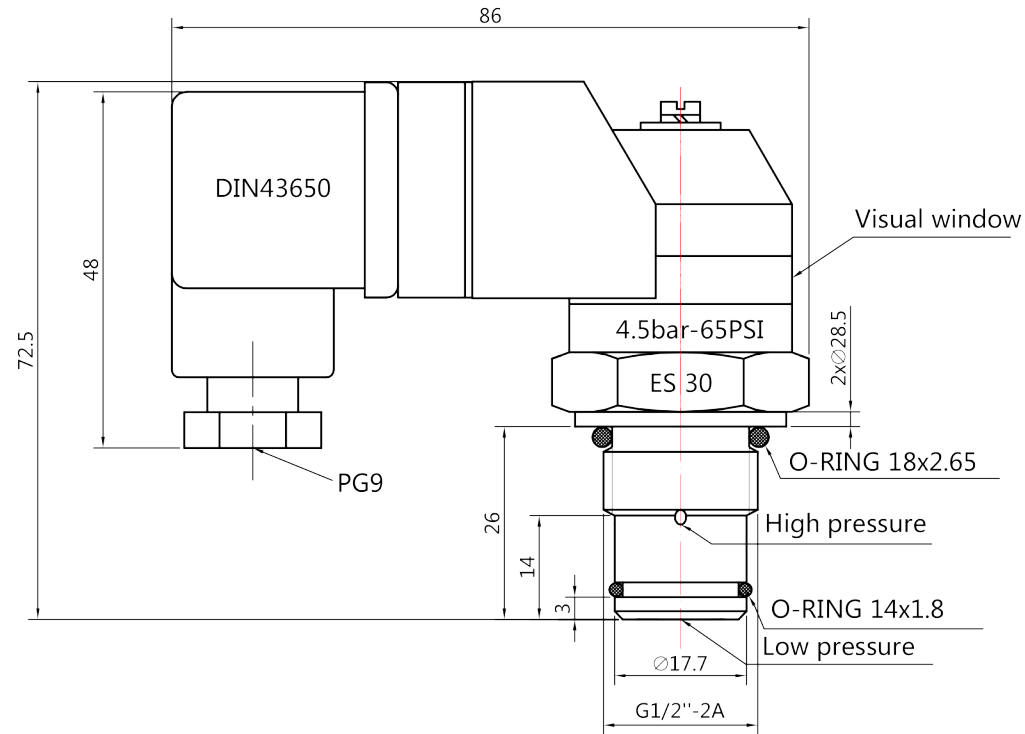

Electrical wiring diagram  
电气接线图



- 1.COM
- 2.NO
- 3.NC
- ⊕ GND

Note (技术参数) :

1. Opening Pressure (发讯值) : 4.5±10%bar
2. Working Pressure (耐压值) : 315bar
3. Seal (密封件材质) : 12.42x1.78NBR 70. 22x2NBR 90
4. Body (材质) : 304
5. Connection (螺纹接口) : G1/2"
6. Ingress Protection (防护等级) : IP65
7. Working temperature (工作温度) : -20°C~100°C
8. Electrical characteristics (电气特性) : 250VAC 3A

## D2-G1/2-4.5BAR - Электровизуальный индикатор