





Performance curve

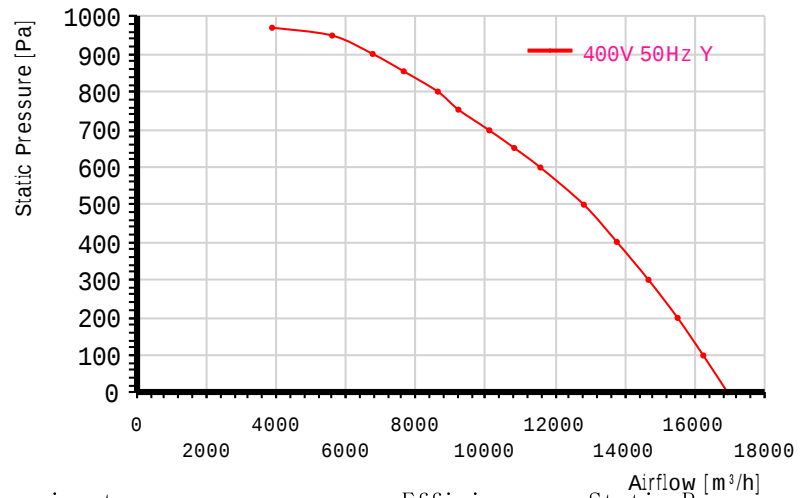


Product Features

- Motor technology: AC
- Supply voltage: 3P, 200~240/380~440V ?/Y
- Supply frequency: 50 Hz
- Rated voltage: 230/400 VAC
- Power input: 4300 W
- Current: 11.8/6.8 A
- Speed: 1370 r/min
- Perm. amb. temp: -25°C~+60°C
- Inlet type: Single Inlet
- Rotation: Counter-clockwise (Seen from cable exit)
- Protection class: IP54
- Insulation class: F
- Impeller material: Sheet aluminium
- Acoustic: 81 dB(A)
- Thermal Protector: Can be configured as requirements
- Housing: Without housing; With inlet ring;

Power input




Efficiency on Static Pressure

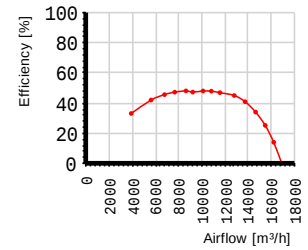

Wiring diagram(Default without thermal protector)

WIRING DIAGRAM

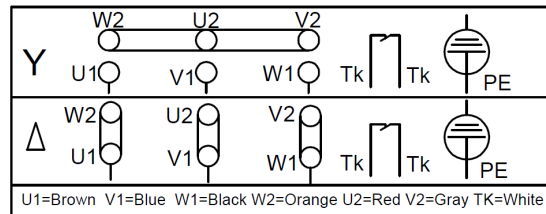

Dimensions mm

