



EVOTECH®
P E R F O R M A N C E


Ducati Hypermotard 950
Tail Tidy


Installation Instructions






Kit Contents PRN014405


- (A) 1 x Reflector Kit
- (B) 1 x P-clip 6.5mm (3)
- (C) 1 x P-clip 8mm (4)
- (D) 2 x Nylon Spacer
- (E) 2 x Threaded Bars
- (F) 2 x M4 Special Washers
- (G) 2 x M4 x 12 Black Button Head Bolts
- (H) 2 x M5 x 10 Countersunk Screws
- (I) 2 x M4 x 6 Black Button Head Bolts
- (J) 3 x M8 x 12 Silver Button Head Bolts
- (K) 4 x M4 x 12 Silver Button Head Bolts
- (L) 4 x M5 x 8 Silver Button Head Bolts
- (M) 4 x Support Arm Washers
- (N) 8 x M4 x 8 Black Button Head Bolts

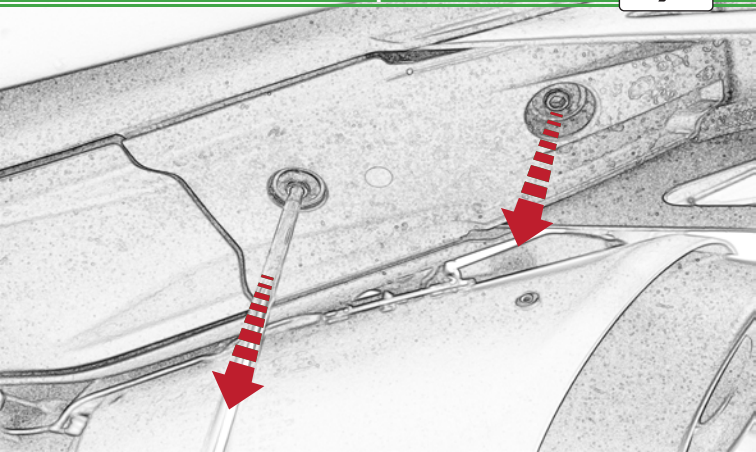


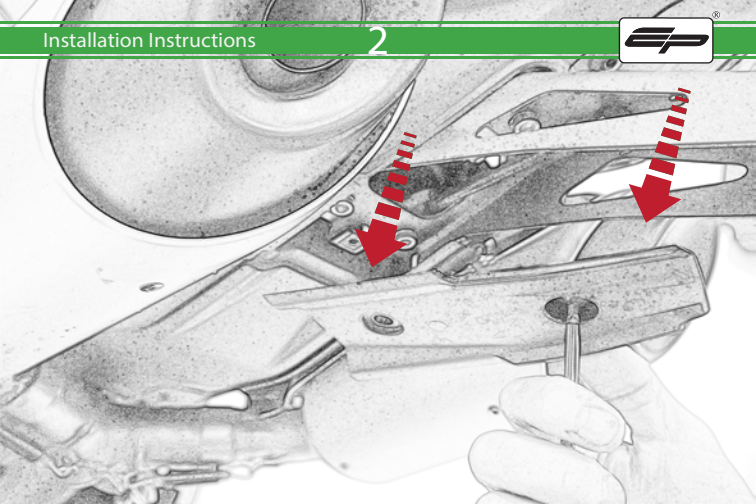


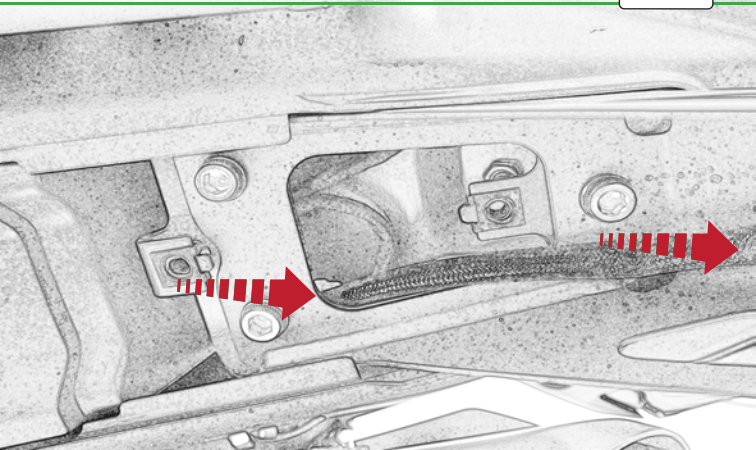


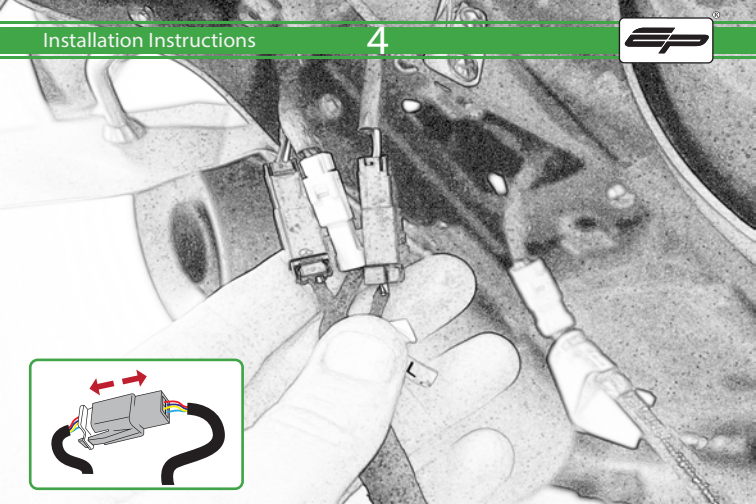




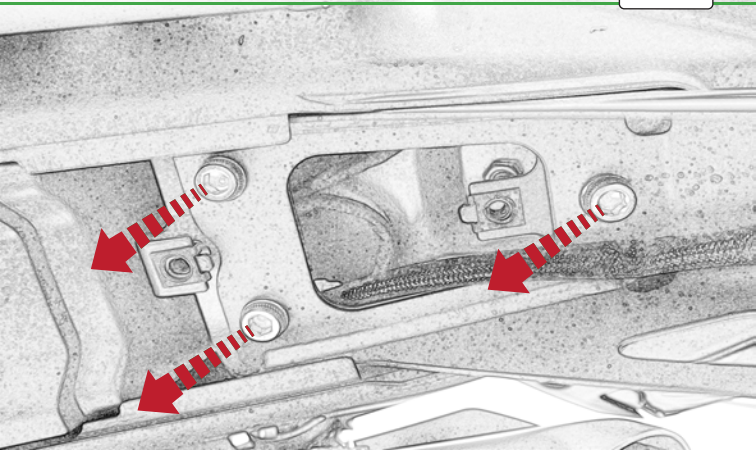



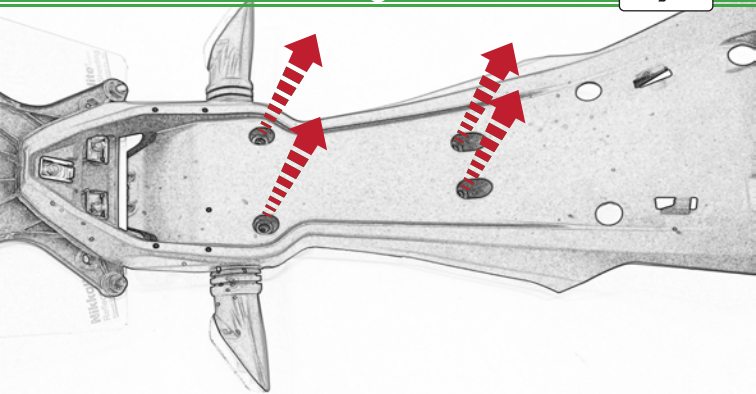


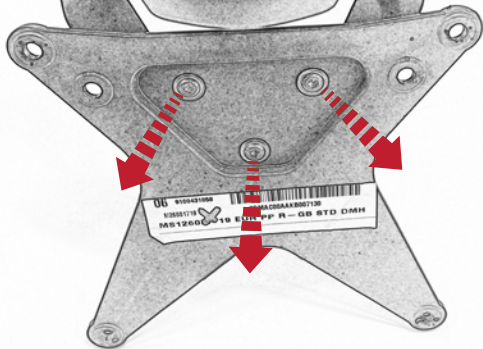



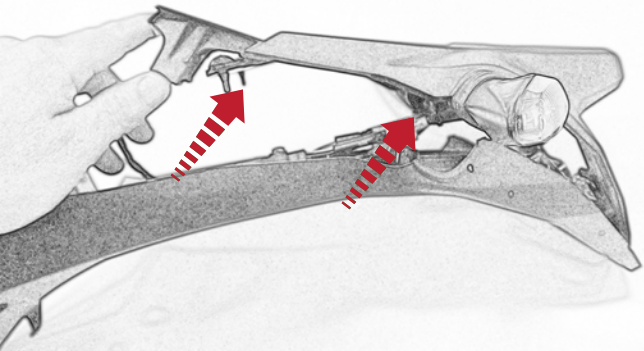


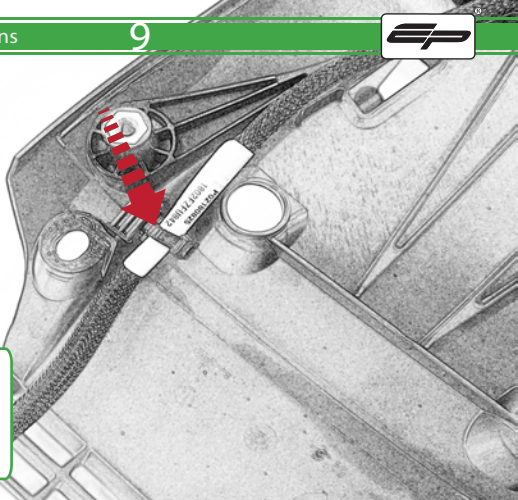



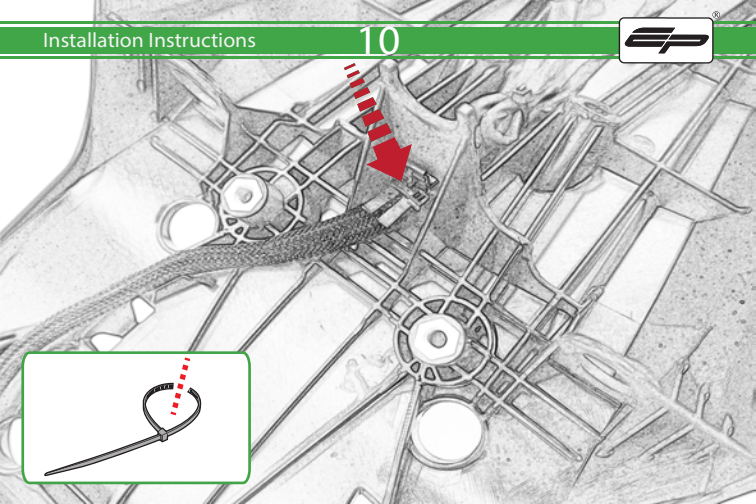


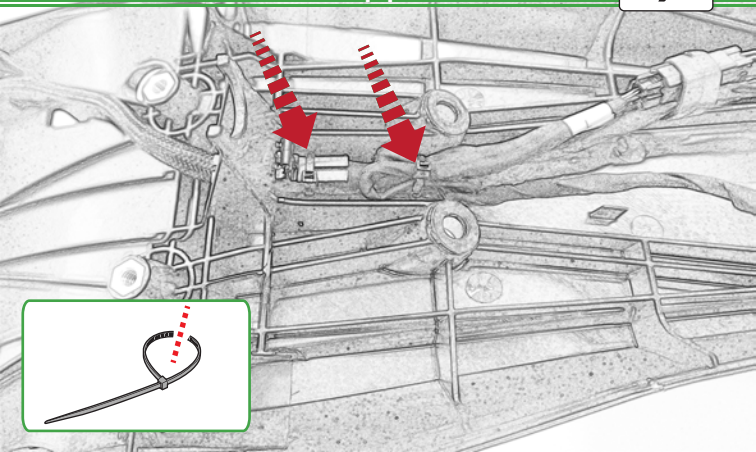


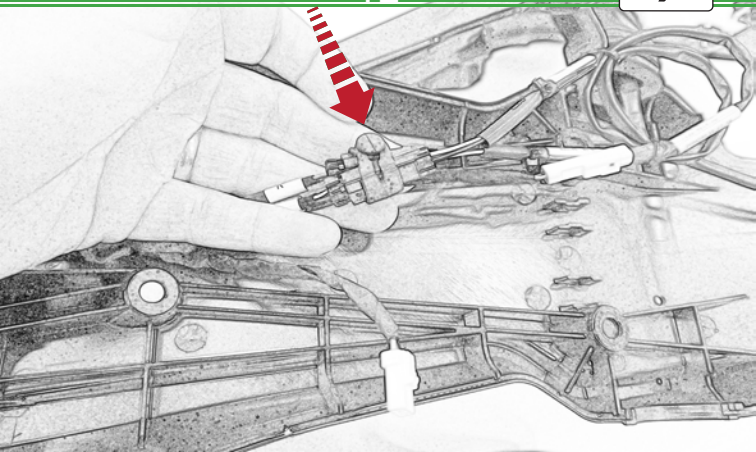


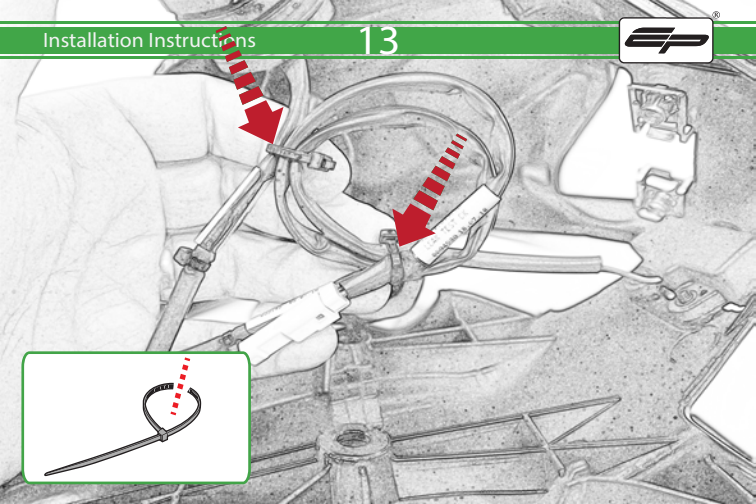


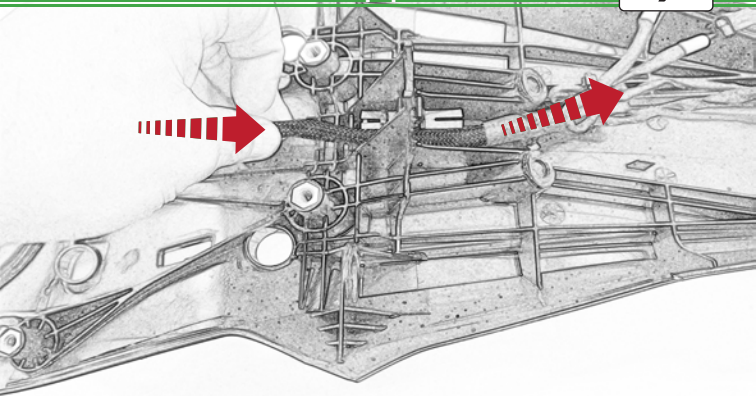


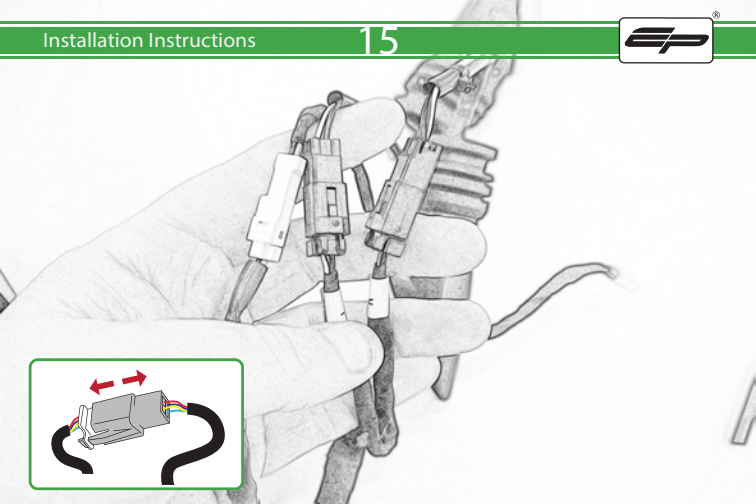


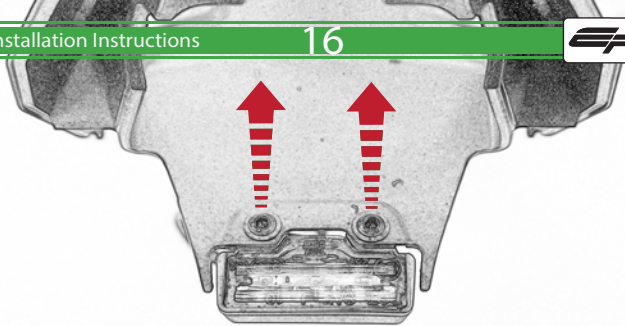

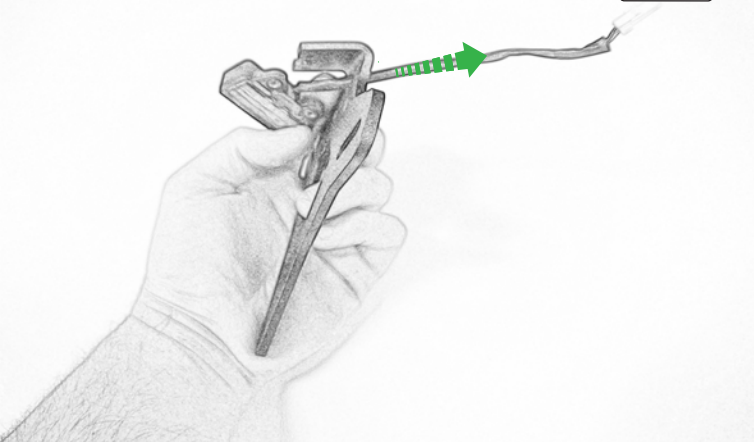


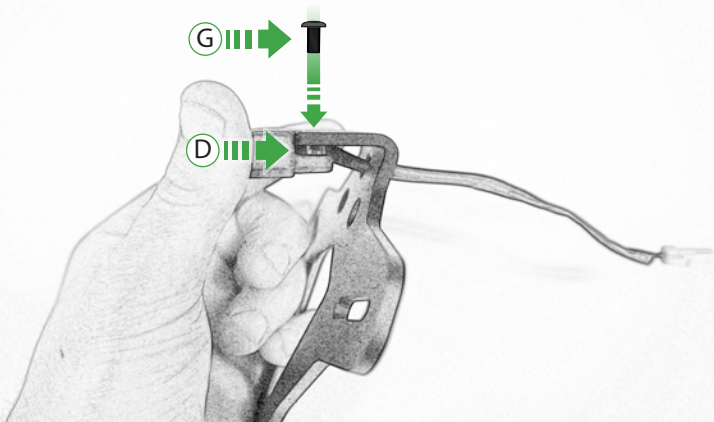


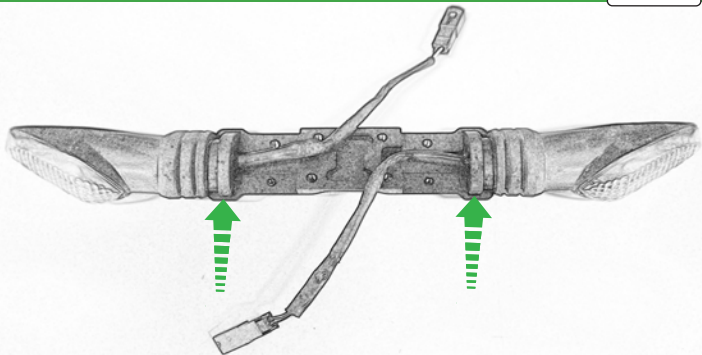


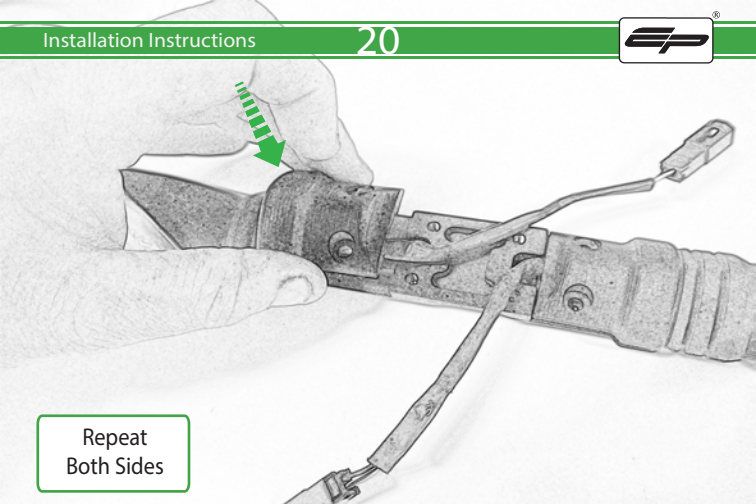



Repeat
Both Sides

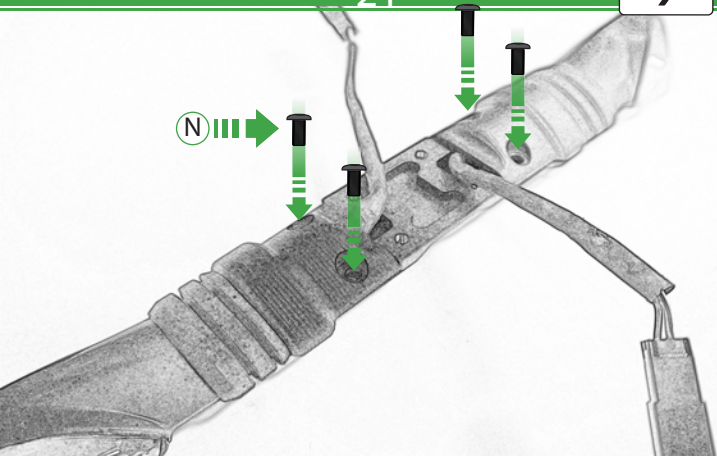

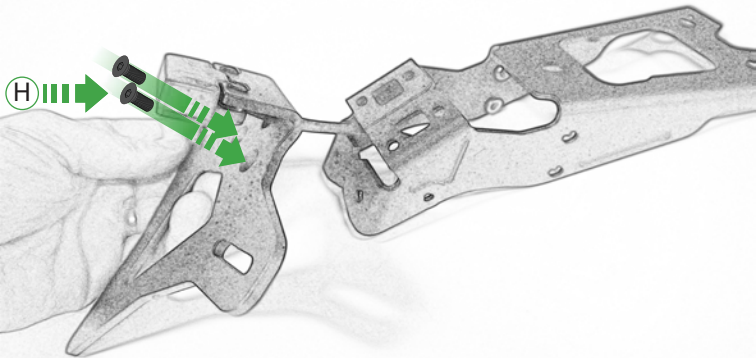


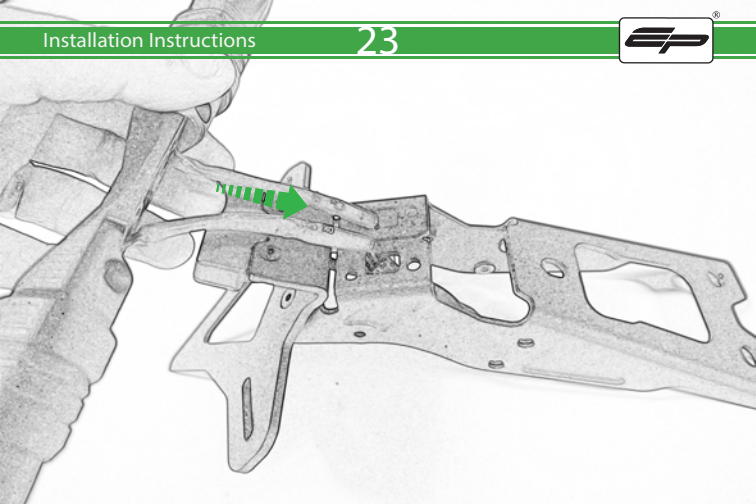


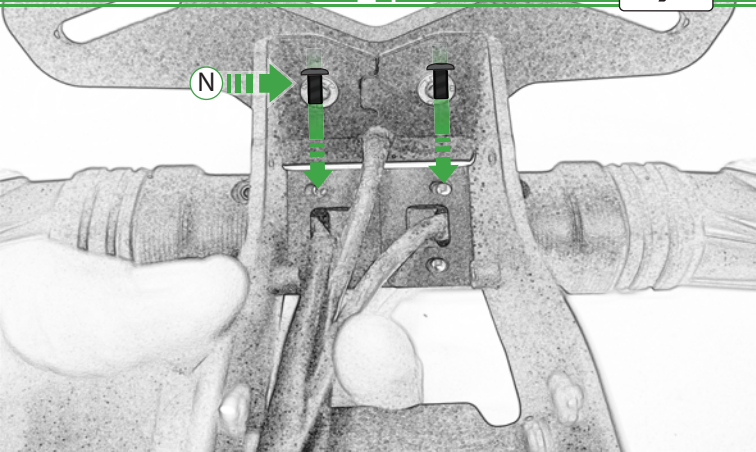


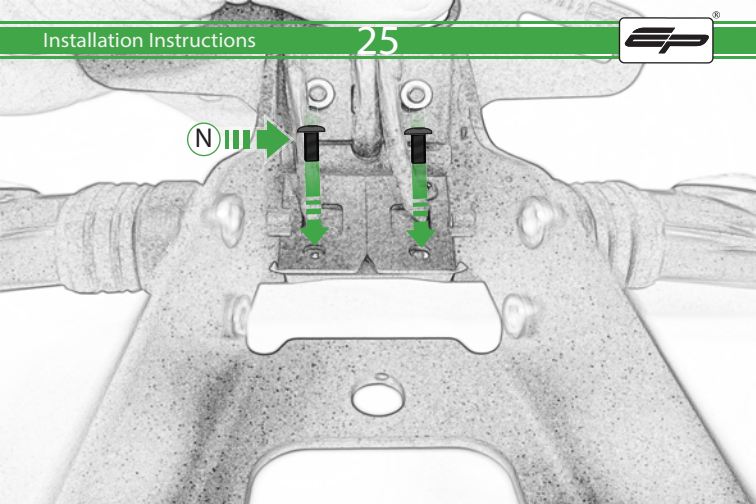




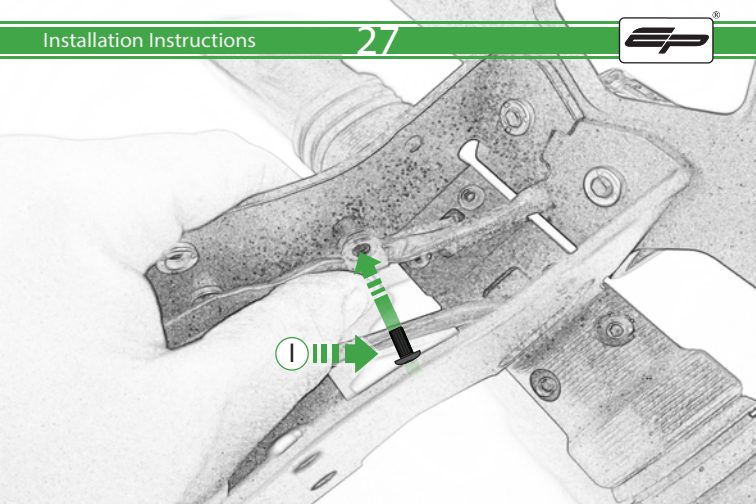

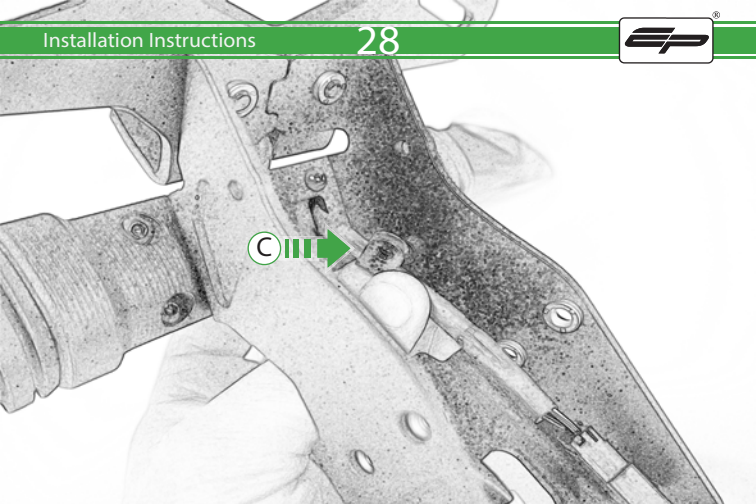

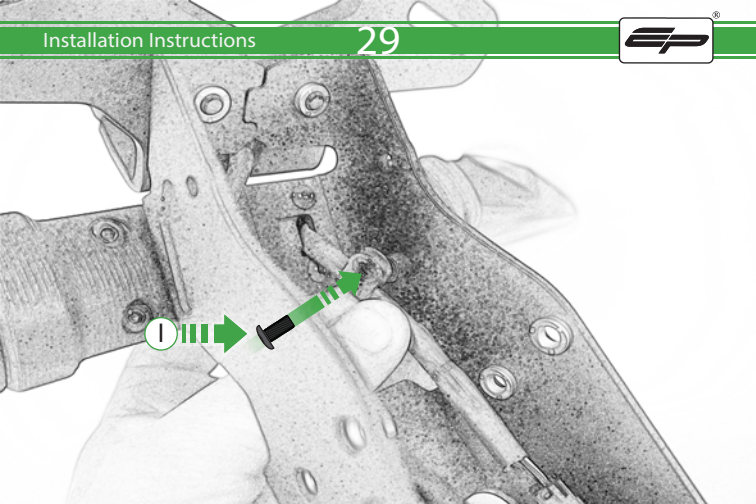


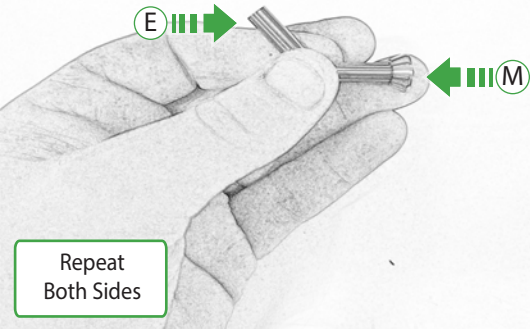

Repeat
Both Sides




Repeat
Both Sides

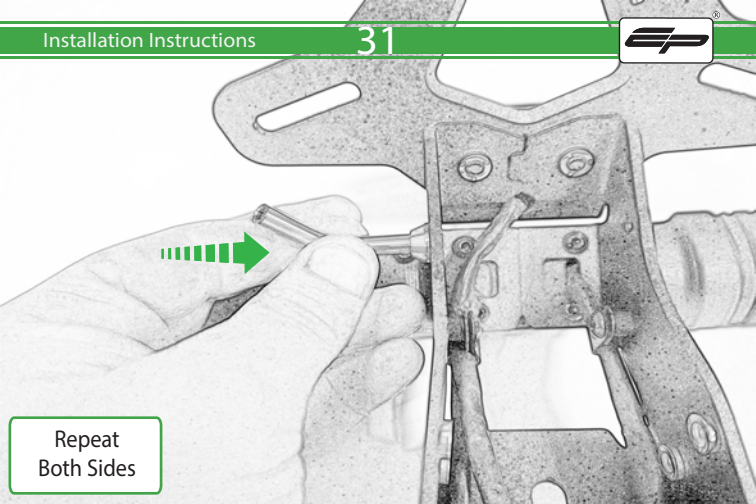




Repeat
Both Sides

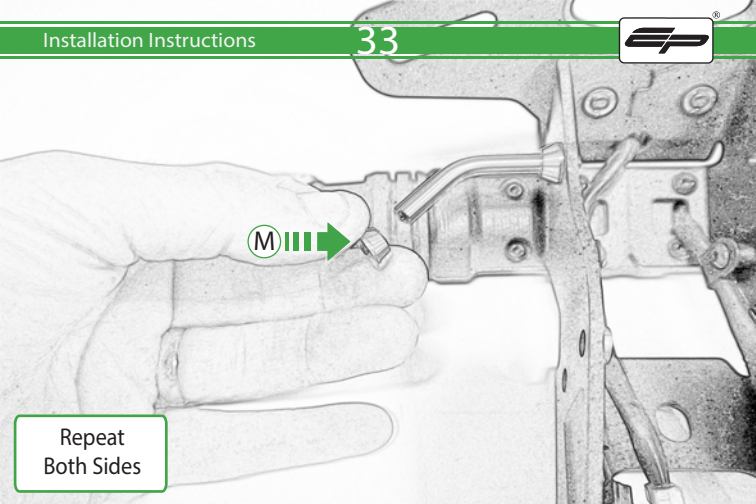

Repeat
Both Sides

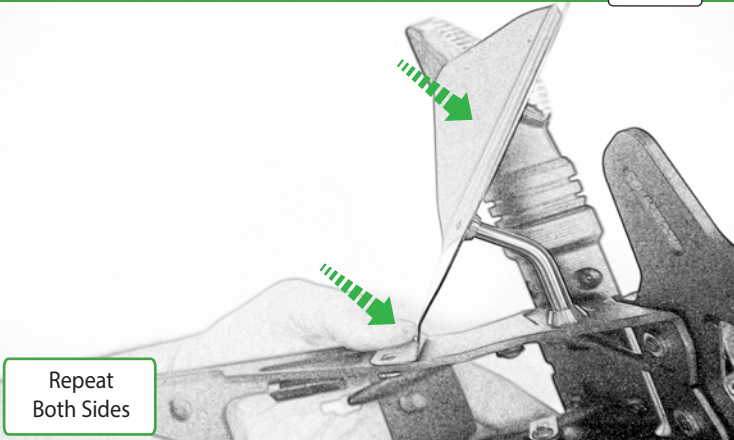


Repeat
Both Sides




L





Repeat
Both Sides


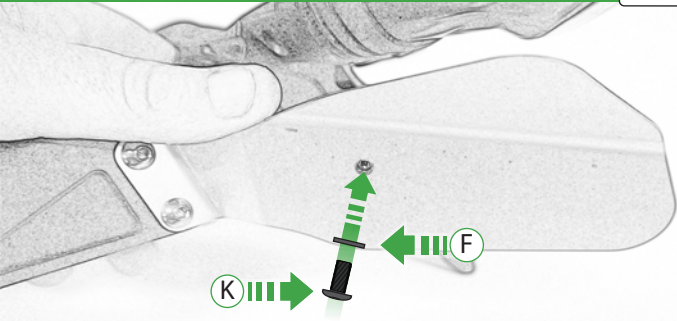



Repeat
Both Sides

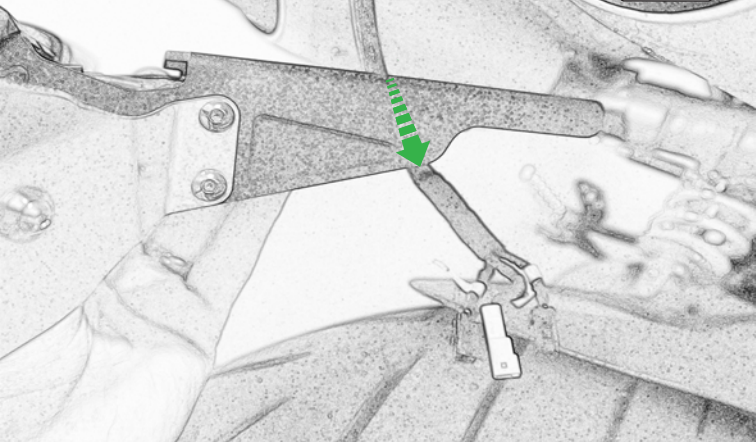

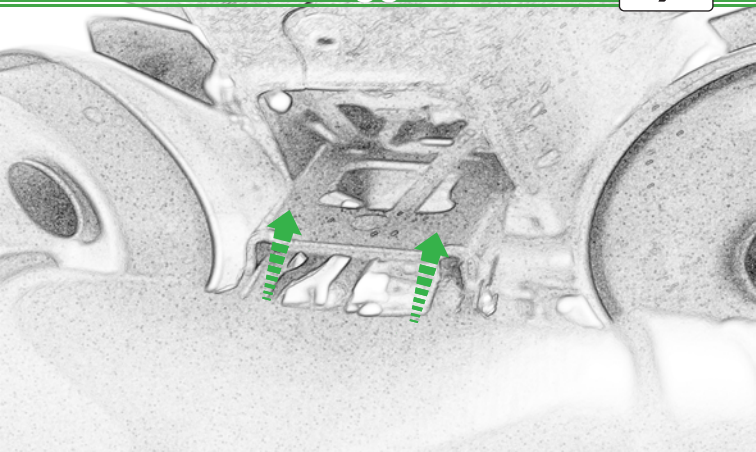

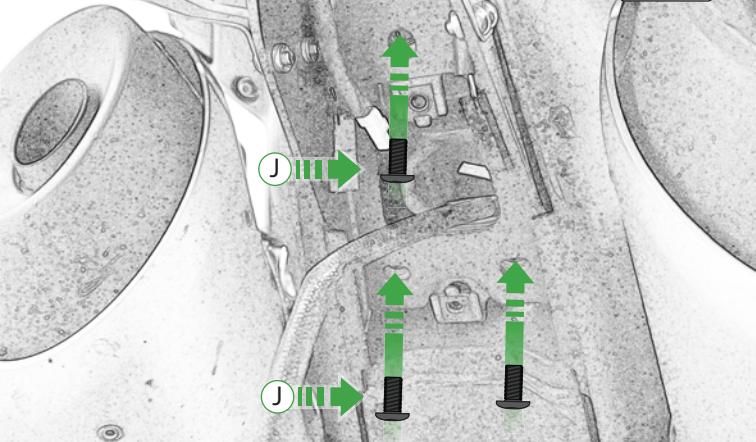


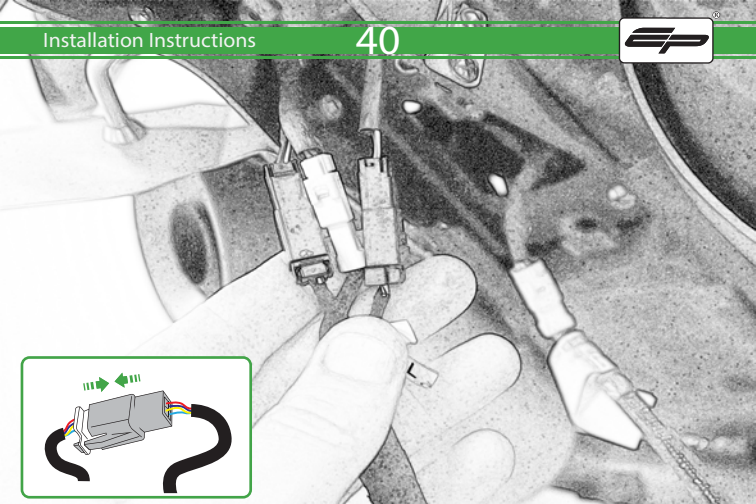

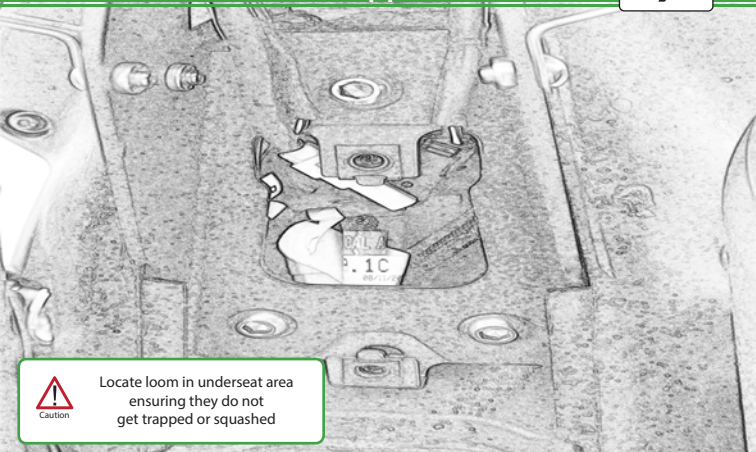

Caution

Locate loom in underseat area
ensuring they do not
get trapped or squashed

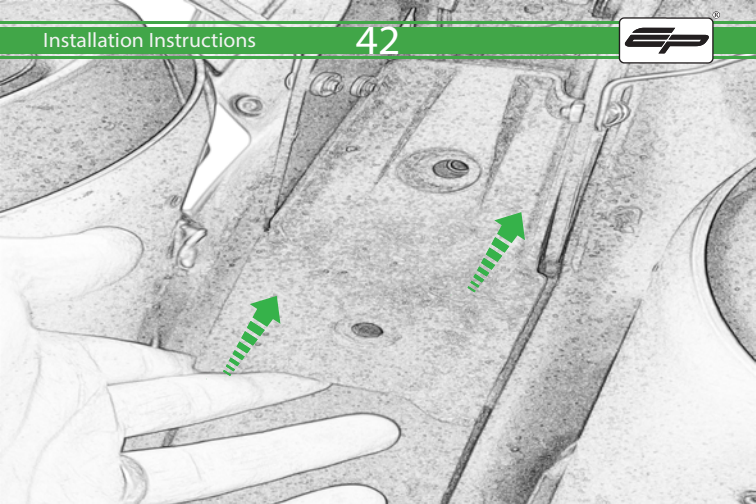





OEM PART

OEM PART



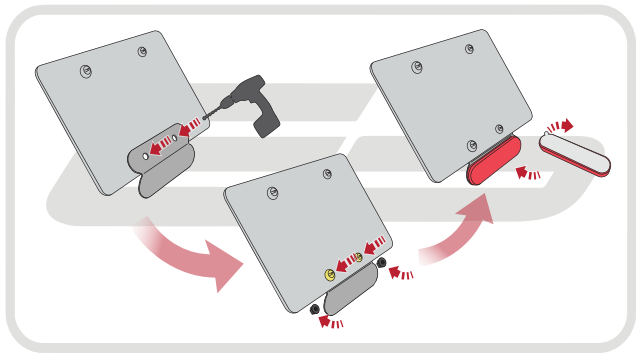

EVOTECH[®]
P E R F O R M A N C E

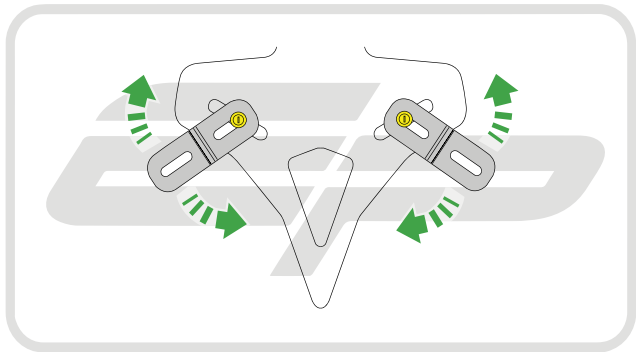



 **ESSENTIAL CHECKS** 

After installation of your tail tidy ensure that the licence plate does not contact the rear tyre when suspension is fully compressed.

Ensure all electrics including indicators, tail light, brake light and licence plate light lights are working correctly before riding the motorcycle.

It is recommended that periodic inspections are made to ensure that all fixings are fully tightend.



EVOTECH®
P E R F O R M A N C E

www.evotech-performance.com