

Pilot Operated Proportional Reducing Valve

Model: DRE/DREM...6XJ



ГИДРООТВЕТ
доступная гидравлика

- ◆ Size 10/25
- ◆ Maximum working pressure 315bar
- ◆ Maximum working flow 300 L/min

Contents

Function description, sectional drawing	02-03
Functional symbols	03
Models and specifications	04
Technical parameters	05-06
Characteristic curve	06-07
Component size	08-09

Features

- Maximum pressure protection, optional
- Optional check valve for freely flow of oil in reverse direction
- For subplate mounting
- For installation in manifolds
- Both valves and proportional amplifiers from the same supplier

Function description, sectional drawing

The DRE (M) valve is a pilot operated pressure reducing valve, it is used to reduce working pressure. The valve mainly consists of pilot valve (1) with proportional solenoids (2), main valve (3) with a main spool insert (4), and an optional check valve (5).

Model DRE

The pressure at port A acts on the surface (7) of the main spool via throttle (6). The pilot oil flows from port B through the throttle (8) to the constant flow controller (9) which can keep the pilot flow constant away from the pressure drop between port A and B. The pilot oil flows from the constant flow controller (9) to the spring chamber (10), via throttles (11 and 12) and valve seat (13) to port Y(14, 15, 16) and from there to the tank. The pressure required in port A is controlled by the relevant amplifier. The proportional solenoid pushes the conical valve (20) towards the valve seat (13) to limit the pressure of the spring chamber (10) to the setting value. If the pressure at Port A is lower than the setting value, the pressure difference in the spring chamber (10) pushes the main spool to the right, thereby the connection from Port B to Port A is opened.

When the required pressure in port A is achieved, the force at the main spool is balanced and the main spool is maintained in the working position.

The pressure in port A X spool area (7) = spring chamber (10) pressure X spool area - spring force (17). If the pressure built up by the pressure liquid column (e.g. cylinder piston to stop) at port A is to be reduced, it need to adjust a lower command value in the relevant amplifier, and then the lower pressure will be built up in the spring chamber (10).


The higher pressure at port A acts on the face (7) of the main spool and pushes the main spool towards the plug (18). The connection from A to B is closed but A to Y is opened. The force of the spring (17) is used to balance the hydraulic pressure acting on the face (7) of the main spool. At this main spool position, the oil flows from port A to port Y through the control edge (19) into the return pipeline.

When the pressure at port A reduces to the pressure of the spring chamber (10) plus the pressure difference Δp on the spring (17), the main spool at the control edge A to Y closes the large control bores in the socket. The remaining pressure difference about 10 bar for the set pressure at port A can only be unloaded by control channel (21), thus it can achieve a perfect transient response performance without pressure sudden changes.

To ensure the fluid flows freely from port A to port B, a check valve (5) can be selected. Parts of the oil from port A will flow into port Y through the control edge (19) of the main valve spool into the return pipeline.

Model DREM

To prevent the unexpected increase of the control current due to the proportional solenoid, which cause an increase in pressure at port A and may affect the safety of the hydraulic system, it can optionally install a spring-loaded pressure relief valve as maximum pressure limitation (22) for maximum pressure protection of the system.

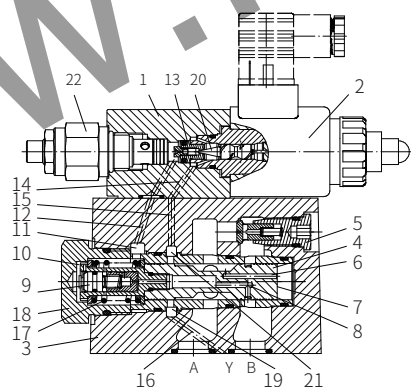


Model DREM- 6XJ/ YG24K24 (with check valve)


Function description, sectional drawing

Model DRE (M) E (with integrated amplifier)

The function and design of this type valve is exactly the same as the DRE (M) valve if without integrated amplifier. The amplifier is located in the connector (23), and supplies power and receives the command value voltage by plug-in type (24). The set value - pressure characteristic curve is pre-set by the manufacturer based on the principle of minimum manufacturing tolerance.

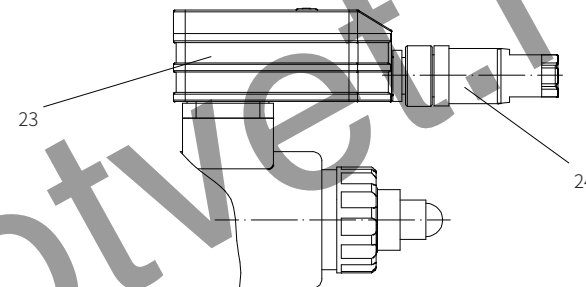

Functional symbols




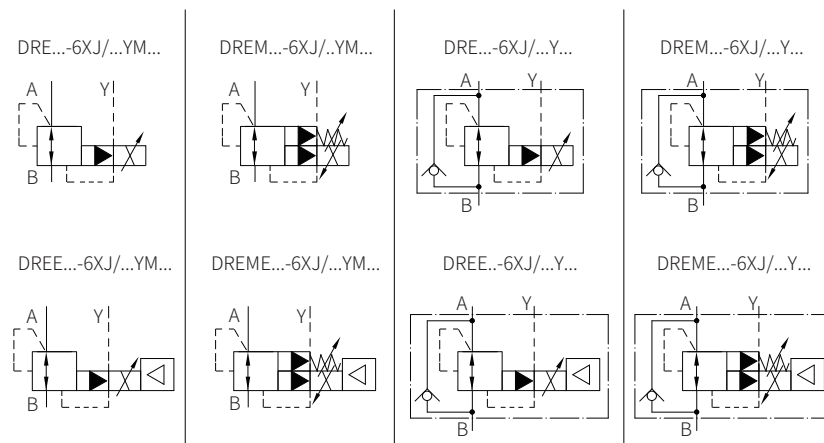


Technical parameters

Electronic control unit (OBE)			
Supply voltage	Nominal voltage	VDC	24
	Lower limit value	VDC	21
	Upper limit value	VDC	35
Current consumption		A	≤ 1.5
Required power		A	2, time interval
Input	Voltage	V	0 to 10
	Current	mA	4 to 20
Output	Measuring current	mA	1 mV ± 1 mA
Valve protection to EN60529			IP65

Characteristic curve



(Measured when using HLP46, $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)

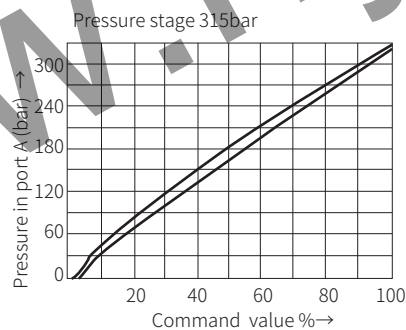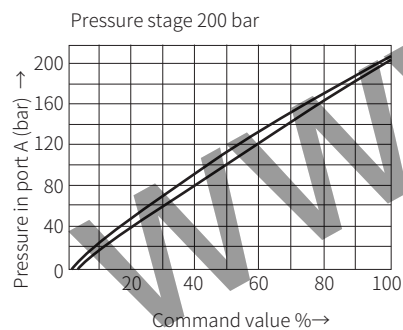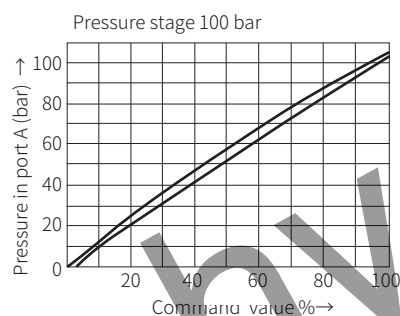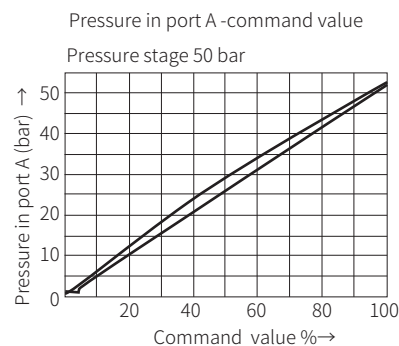


Characteristic curve

(Measured when using HLP46, $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)


Pressure in port A - flow q_v

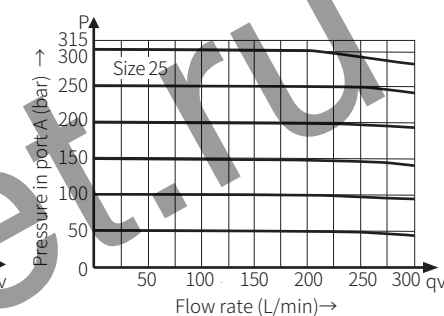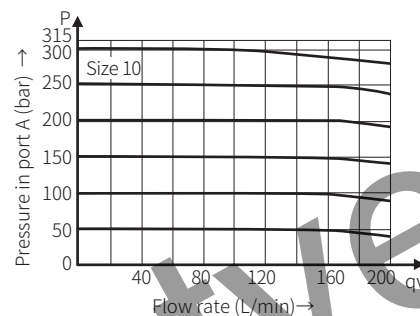

The pressure difference via the check valve from port A to port B

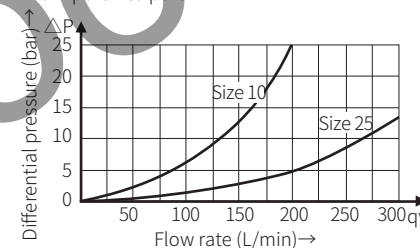


The pressure difference from port B to port A

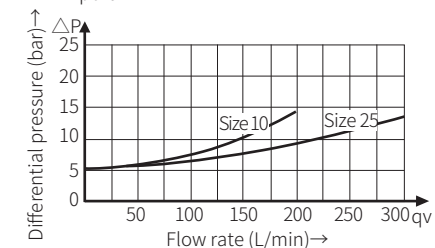



Component size

Size unit: mm

Model DRE(M)

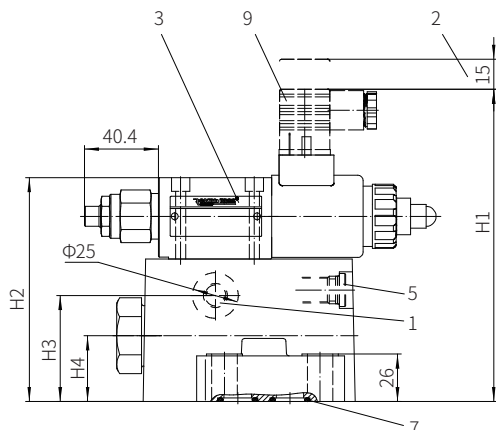

- 1 The oil port is closed. After removing the sealing plug, if the external pilot oil needs to be returned to the oil tank at zero pressure, this oil port can also be used to drain the oil
- 2 Space required to remove the plug
- 3 Name plate
- 4 Blind hole
- 5 Optional check valve
- 6 Locating pin hole
- 7 O-ring
- 8 Pilot oil always drain external separately and at zero pressure to the oil tank
- 9 Plug to DINEN175301-803

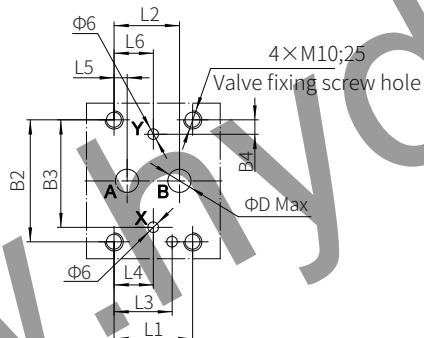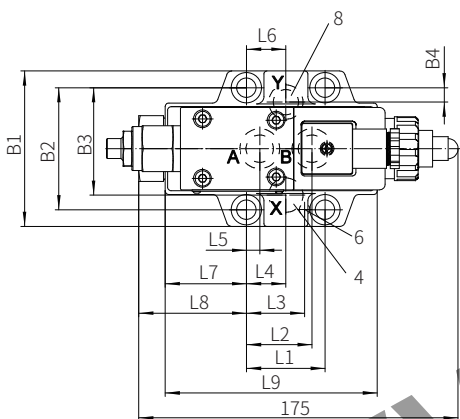


size	L1	L2	L3	L4	L5	L6	L7	L8	L9
10	42.9	35.8	31.8	21.5	7.2	21.5	44.5	59	116
25	60.3	49.2	44.5	20.6	11.1	39.7	27.3	41.8	116

size	B1	B2	B3	B4	H1	H2	H3	H4	D
10	85	66.7	58.8	7.9	170.8	122.5	58	36	13
25	102	79.4	73	6.4	184.5	136.5	64	44	22



Component size

Size unit: mm

Model DRE(M)E

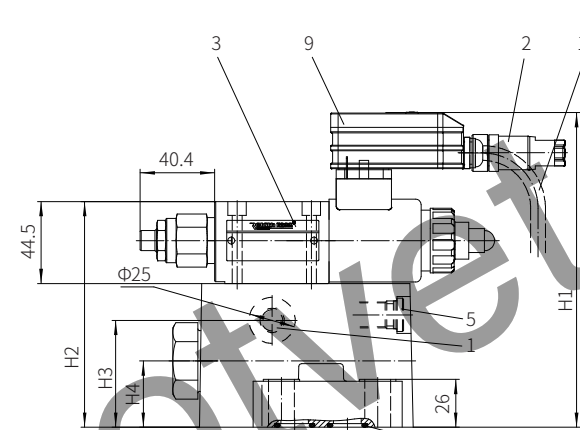

- 1 The oil port is closed. After removing the sealing plug, if the external pilot oil needs to be returned to the oil tank at zero pressure, this oil port can also be used to drain the oil
- 2 Plug
- 3 Name plate
- 4 Blind hole
- 5 Optional check valve
- 6 Locating pin hole
- 7 O-ring
- 8 Pilot oil always drain external separately and at zero pressure to the oil tank
- 9 Amplifier
- 10 Cable

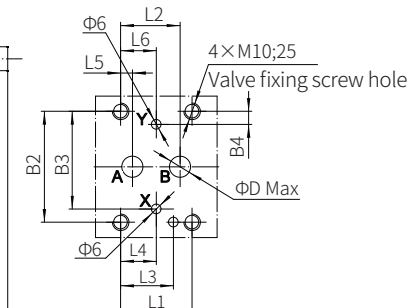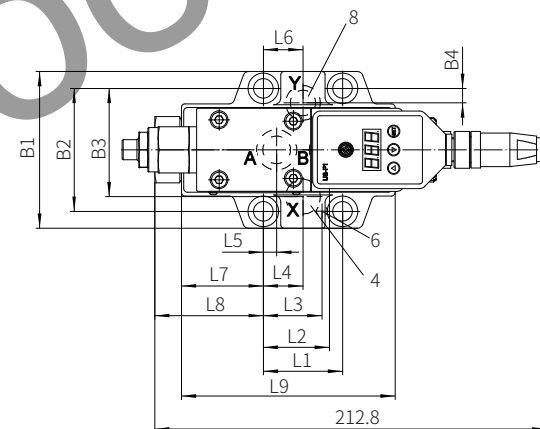

size	L1	L2	L3	L4	L5	L6	L7	L8	L9
10	42.9	35.8	31.8	21.5	7.2	21.5	44.5	59	116
25	60.3	49.2	44.5	20.6	11.1	39.7	27.3	41.8	116

size	B1	B2	B3	B4	H1	H2	H3	H4	D
10	85	66.7	58.8	7.9	170.8	122.5	58	36	13
25	102	79.4	73	6.4	184.5	136.5	64	44	22