

8317082558
VBS0225RSLFS

EC centrifugal fan

backward-curved, single-intake

ebm-papst Ventilator(Xi'an)Co.,Ltd.
No.2555,No.5 Weishui Road,Weibei Industry Park,
Lintong District, Xi'an, Shaanxi Province, 710000, China
Tel: +86(0)29-81366100
www.ebmpapst.com

Nominal data

Type	8317082558	
Motor	E06005-30(M3G060-DA)	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Power input	W	170
Current draw	A	1.3
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	54.2	43.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		72.8	62
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.17
09 Air flow q_v	m³/h	723
09 Pressure increase p_{fs}	Pa	405
10 Speed (rpm) n	min ⁻¹	2876
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

ID15124



8317082558
VBS0225RSLFS

EC centrifugal fan

backward-curved, single-intake

Technical description

Weight	1.75 kg
Size	225 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	Plastic
Number of blades	7
Balancing grade according to DIN ISO 1940-1	G 6.3
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10VDC, max. 10 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage protection - Thermal overload protection for electronics / motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2(industrial environment)
EMC interference emission	According to EN 61000-6-3(household environment)
Touch current acc.IEC 60990	<=3.5 mA
Motor protection	Reverse polarity and locked-rotor protection
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	GB12350, EN60034-1, EN60335-1, CCC, CE
Approval	



EC centrifugal fan

backward-curved, single-intake

[illegible]

ebm-papst reserves the right to make product changes or improvements at any time without notice. • Released in 2022-12-20 Page 3/5




ebmpapst

EC centrifugal fan

backward-curved, single-intake

Connection diagram

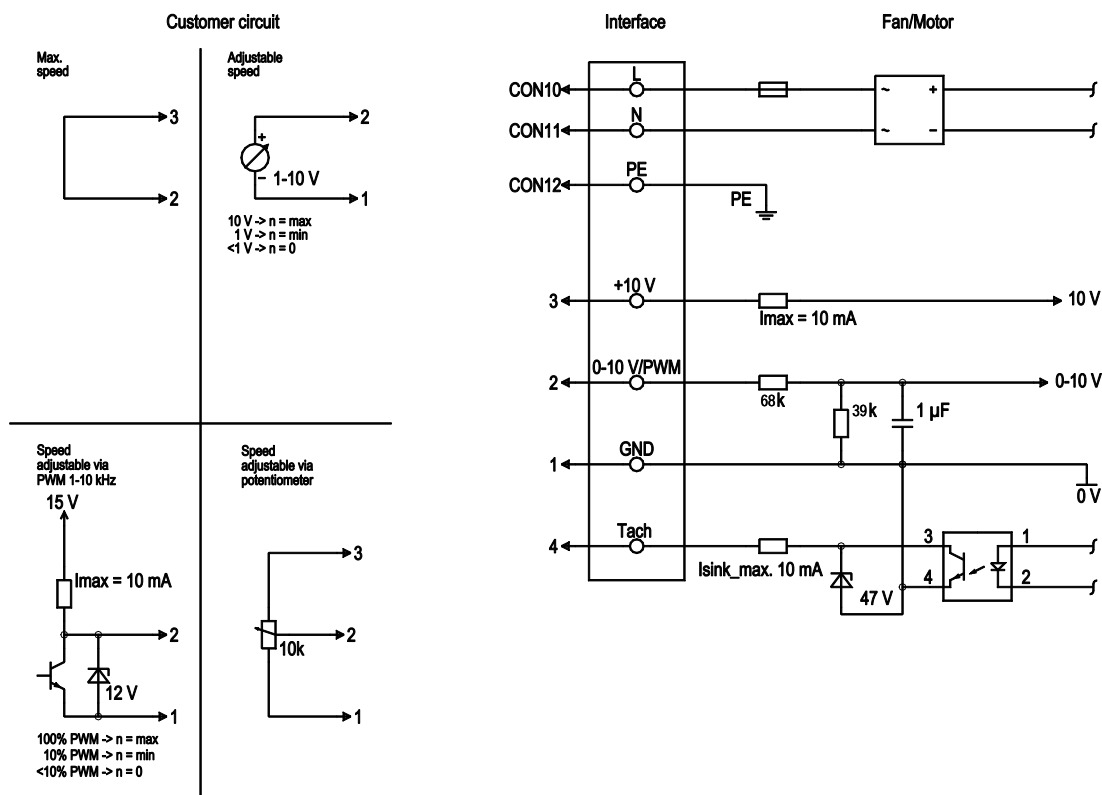


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	3	+10 V	red	Fixed voltage output 10 VDC +/-3 %, $I_{max.} 10 \text{ mA}$, short-circuit-proof, power supply for ext. devices (e.g. pot), SELV
	2	0- 10V PWM	yellow	0-10 V / PWM control input, $R_i=100 \text{ k}\Omega$, SELV
	1	GND	blue	Reference ground for control interface, SELV
	4	Tacho	white	Tach output, open collector, 1 pulse per revolution, $I_{sink \text{ max}} = 10 \text{ mA}$, SELV

8317082558
VBS0225RSLFS

EC centrifugal fan

backward-curved, single-intake

Curves: Air performance

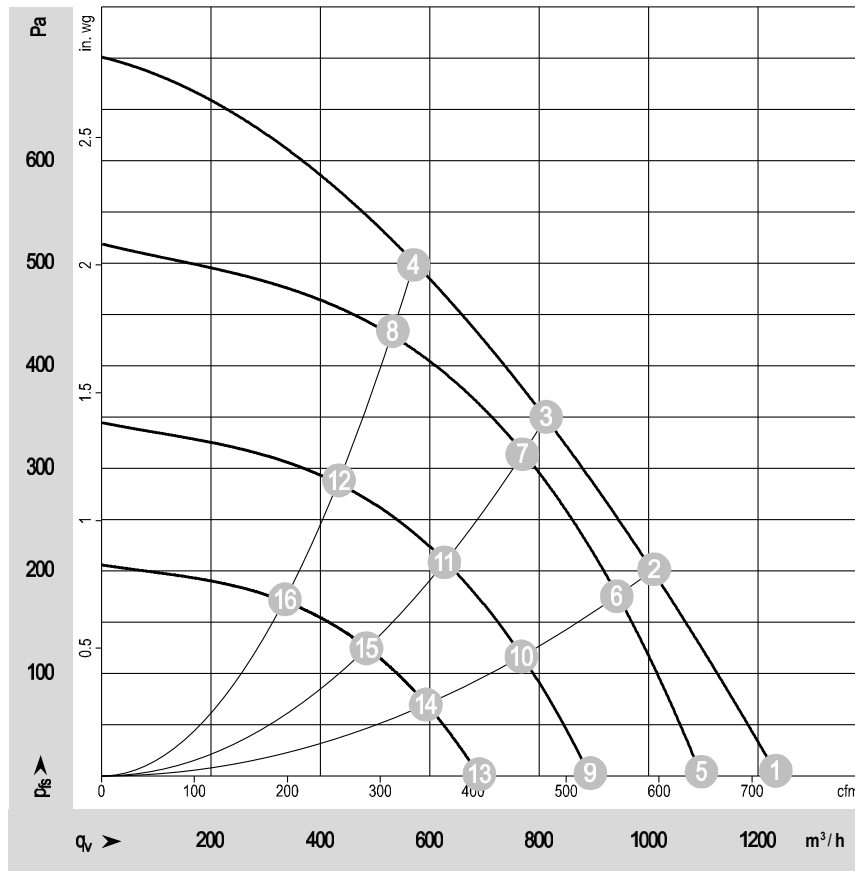

$\rho = 1.2 \text{ kg/m}^3 \pm 2 \%$

Measurement: ID 15124

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Fan performance

Index	U	f	n	Ped	I	LpAin	LwAin	qv	pfs	qv	Pfs
	V	Hz	min-1	W	A	dB(A)	dB(A)	m3/h	Pa	cfm	in.wg
01	230	50	3035	170.0	1.23	72	80	1233	0	725	0
02	230	50	2896	170.0	1.23	67	74	1010	201	594	0.81
03	230	50	2852	170.0	1.24	62	70	813	350	478	1.41
04	230	50	2892	170.0	1.23	63	71	571	499	336	2.00
05	230	50	2700	119.7	0.87	69	77	1097	0	645	0
06	230	50	2700	137.8	1.00	65	73	942	175	554	0.70
07	230	50	2700	144.2	1.05	61	69	769	314	452	1.26
08	230	50	2700	138.4	1.00	61	69	533	435	314	1.75
09	230	50	2200	64.8	0.47	64	72	894	0	526	0
10	230	50	2200	74.6	0.54	60	68	767	116	451	0.47
11	230	50	2200	78.0	0.57	56	63	627	208	369	0.84
12	230	50	2200	74.8	0.54	56	64	434	289	255	1.16
13	230	50	1700	29.9	0.22	58	65	691	0	406	0
14	230	50	1700	34.4	0.25	53	61	593	69	349	0.28
15	230	50	1700	36.0	0.26	49	57	484	124	285	0.50
16	230	50	1700	34.5	0.25	50	58	335	172	197	0.69

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
P_{fs} = Pressure increase

