

# Deka BATTERY LINE SPECIFICATIONS

## MARINE MASTER®

EFFECTIVE February 2, 2015  
 Supersedes all previous information. Subject to change without notice.



LYON STATION, PA 19536 • Phone: 610-662-6361 • Fax: 610-662-4781  
 Order Department Hotline: 610-662-4231  
 www.dekabatteries.com

GROUP NO.	PART NO.	PERFORMANCE LEVEL				WEIGHT (lb)		LENGTH		WIDTH		HEIGHT		Core Value	Warranty Free Mo.	FOOTNOTES
		CCA	R.C.	REF. MCA		WET		in	mm	in	mm	in	mm			
24	24M7	800	130	1000		45							1.0	12	17,22,U	
	24M6	650	115	800		41		10-3/4	273	6-3/4	171	9-3/8	1.0	12	17,22,U	
	24M5	550	90	675		37							1.0	12	17,22,U	
	24M4	460	70	565		36							1.0	12	17,22,U	
27	27M6	840	182	1050		57.5		12-1/2	318	6-3/4	171	9-3/8	1.0	12	17,U	
GROUP NO.	PART NO.	CCA	REF. MCA	MINS @ 23 A	MINS @ 25 A	20 HR CAP	WEIGHT (lb) WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Warranty Free Mo.	FOOTNOTES
24	DP24	550	675	140	120	65	43.5	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U
27	DP27	650	800	175	150	80	51	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U
31	DP31DT	700	860	205	185	100	57	13	330	6-3/4	171	9-1/2	241	1.5	12	17,21,22,44,A
24	DC24	500	615	150	130	75	45.5	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	11,17,35,44,U
27	DC27	575	705	200	175	90	53.5	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	11,17,35,44,U
31	DC31DT	650	800	225	185	105	60	13	330	6-3/4	171	9-1/2	241	1.5	12	11,17,21,22,35,44,A

Note: The three "DC" deep cycle part numbers above include double insulated glass mat separators.

# Deka INTIMIDATOR®

## AGM VALVE-REGULATED ABSORBED GLASS MAT TECHNOLOGY


GROUP NO.	PART NO.	CCA	REF. MCA	R.C.	MINS @ 25 A	20 HR CAP	WEIGHT (lb)		LENGTH		WIDTH		HEIGHT		Core Value	Warranty Free Mo.	FOOTNOTES
							WET		in	mm	in	mm	in	mm			
981	8V195	980	1205	170	166	90	90	20-3/4	527	7-1/4	184	10-5/8	270	2.0	6	11,15,17,25	
983	819	510	625	167	158	119	119	24-1/2	622	7-1/2	191	10-1/2	267	3.0	6	11,17,20,25,35,T	
984	821	530	650	187	177	135	135	27-1/2	699	7-1/2	191	10-1/2	267	3.0	6	11,17,20,25,35,T	
985	825	730	900	224	212	160	160	26-7/8	683	8-1/2	216	11-3/4	298	4.0	6	11,17,20,25,35,F	

# Deka DOMINATOR®

## GEL VALVE-REGULATED GELLED ELECTROLYTE TECHNOLOGY

GROUP NO.	PART NO.	CCA	REF. MCA	R.C.	MINS @ 25 A	20 HR CAP	WEIGHT (lb)		LENGTH		WIDTH		HEIGHT		Core Value	Warranty Free Mo.	FOOTNOTES
							WET		in	mm	in	mm	in	mm			
U1	8AU1	200	240	45	54	32	24	7-3/4	197	5-1/8	130	7-1/4	184	0.5	12	2,38,39,44,Y	
	8AU1H	200	240	45	54	32	24	8-5/16	211	5-1/8	130	7-1/4	184	0.5	12	2,17,38,39,44,Y	
22NF	8A22NF	350	420	85	95	55	39	9-3/8	238	5-1/2	140	9-1/4	235	0.5	12	2,38,39,44,G	
24M	8A24M	525	800	135	145	79	53	10-7/8	276	6-3/4	171	9-7/8	251	1.0	12	2,17,38,39,44,U	
24	8A24	525	800	135	145	79	53	10-7/8	276	6-3/4	171	9-7/8	251	1.0	12	2,17,38,39,44,G	
	8A24NH	525	800	135	145	79	53	10-1/4	260	6-3/4	171	9-7/8	251	1.0	12	2,38,39,44,G	
34M	8A34M	775	120	890	—	55	42.5	10-3/4	273	6-7/8	175	8-3/8	212	1.0	24	2,13,17,38,39,43,U	
27M	8A27M	580	900	175	185	92	63	12-3/4	324	6-3/4	171	9-7/8	251	1.0	12	2,17,38,39,44,U	
27	8A27	580	900	175	185	92	63	12-3/4	324	6-3/4	171	9-7/8	251	1.0	12	2,17,38,39,44,U	
31M	8A31DTM	800	1000	200	210	105	69	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12	2,16,17,38,39,44,A	
4D	8A4D	1110	1420	380	413	198	131	20-3/4	527	8-1/2	216	10	254	3.0	12	2,17,44	
8D	8A8D	1450	1800	480	517	245	161	20-3/4	527	11	279	10	254	4.0	12	2,17,44	
GC2	8AGC2	680	900	380	409	190	70	10-1/4	260	7-1/8	181	10-7/8	278	1.5	12	2,44,U	

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in polypropylene cases & covers, except where noted
- Batteries manufactured in black cases & covers, except where noted
- SAE automotive posts used, unless noted
- Warranty is suggested months
- Weights are approximate
- MCA and CA ratings @ 32°F are approximations and for comparison only
- Ratings except CCA and RC, are "nominal"
- CCA and RC ratings conform to B.C.I. specifications
- CCA on 8 Volt Marine & Industrial Types is for reference only

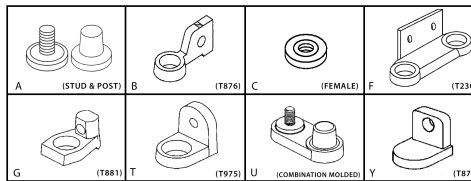

- A. Flush Combination terminal w/ 5/8" Stud and SAE post, Hex nuts included
- B. Flag Terminal w/ 3/8" diameter hole (T876)
- C. 1/4" 20 Copper insert terminal
- F. Double Wide L Terminal w/ two 3/8" holes (T230)
- G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
- T. Heavy Duty L terminal w/ 3/8" diameter hole (T975)
- U. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs and wing nuts
- Y. Small L terminal with round hole (T873)

- FOOTNOTES
- Black cover / Gray case
  - Gray cover / Gray case
  - Low maintenance-low antimony grids
  - Hybrid construction
  - Hard rubber, one-piece cover construction
  - Dual terminal universal design
  - Includes handle
  - Hard rubber, multi-cell cover construction
  - Anchor locked elements
  - Flush manifold vented cover
  - With individual vent caps
  - Deduct 15% from CCA and CA rating to allow for double insulation (glass mat)
  - "Non-spillable" defined by DOT (Department of Transportation) definitions
  - "Non-spillable" defined by ICAO (International Civil Aviation Organization) and IATA (International Air Transport Association) definitions
  - Warranty is 12 months in deep cycle use and 3 months in full electric service use
  - Free Replacement Warranty is 3 months in full electric vehicle use