




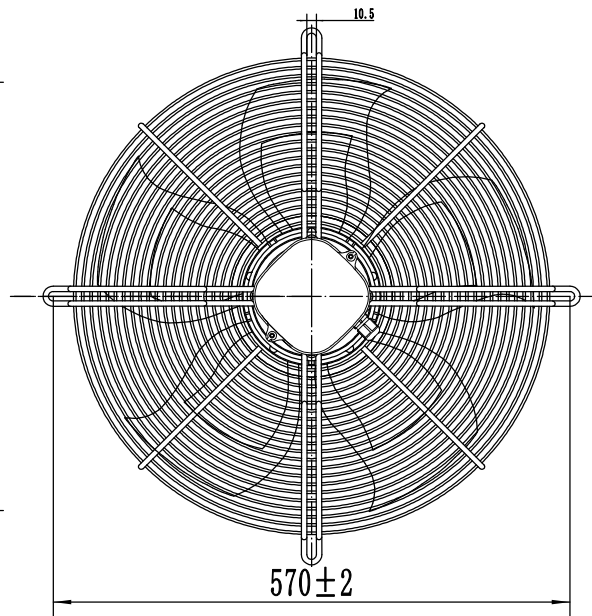


LABEL (铭牌):

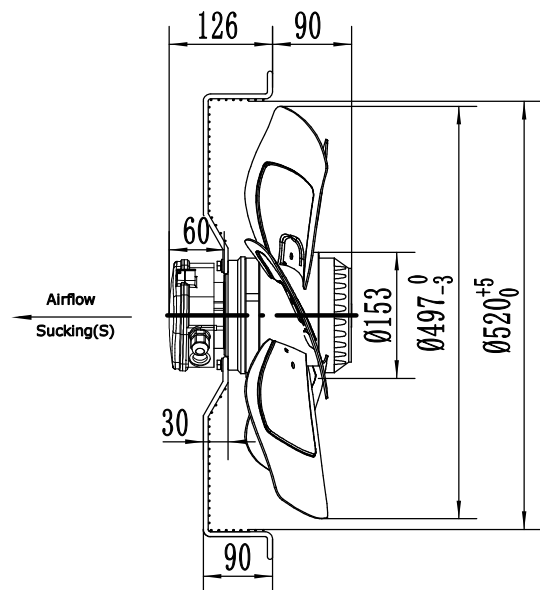


WIRING DIAGRAM (接线图):

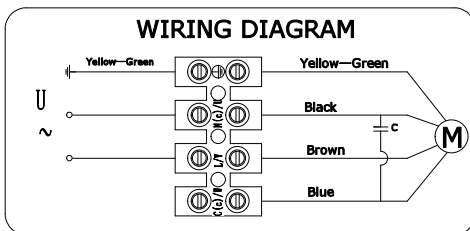

FLOW RATE CURVE (风量曲线):

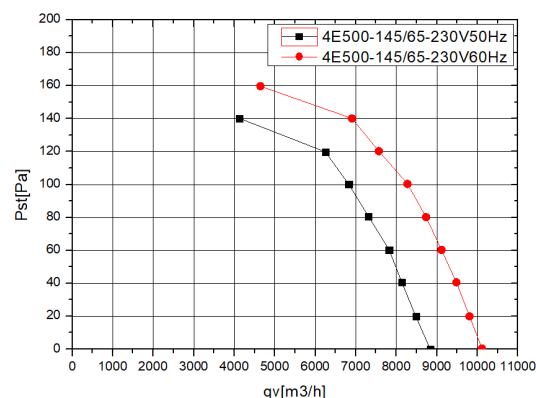

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Single phase motor with capacitor
MOTOR TYPE 电机型号	YWF4E-500S-145/65-G
VOLTAGE 额定电压 (V)	230
FREQUENCY 频率 (Hz)	50/60
INPUT POWER 输入功率 (W)	700/1060
CURRENT 电流 (A)	3.30/4.70
SPEED 转速 (r/min)	1400/1600
AIR FLOW 20Pa 风量 (m³/h)	8484/9807
NOISE 噪音 (dBA)	84/86
CAPACITOR 电容 (μ F/450V)	16
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
PROTECTION CLASS 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 4G 0.75mm²+2G 0.30mm², Length 100mm in terminal box connected 接线盒(4芯0.75mm²+2芯0.30mm²线长100mm)
APPROVALS 认证标记	CE
NET WEIGHT/GROSS WEIGHT 净重/毛重	13/14kg
PACKING 包装	55*55*23cm

REV.	DESCRIPTION	APPROVED	DATE	DRN. BY	SIGN	DATE	TITLE
				CHD. BY			YWF4E-500S-145/65-G
				ENG. BY			PROJECTION 
				APP. BY			A4 SCALE SHEET: of