



Ducati Monster 821

Tail Tidy


Installation Instructions





Product No: PRN013736


Kit Contents


- | | |
|------------------------------|------------------------------------|
| (A) 1 x Main Bracket | (H) 2 x M8 Penny Washers |
| (B) 1 x Number Plate Bracket | (I) 2 x M8 Black Washers |
| (C) 1 x P-Clip | (J) 2 x M5 x 20 Black Button Heads |
| (D) 1 x Sealing plate | (K) 2 x M5 x 10 CounterSunk Screw |
| (E) 2 x Indicator Plates | (L) 4 x M8 x 30 Black Button Heads |
| (F) 2 x Indicator Mounts | (M) 4 x Indicator Clamps (Plastic) |
| (G) 2 x Plastic Spacers | (N) 5 x M4 x 8 Black Button Heads |

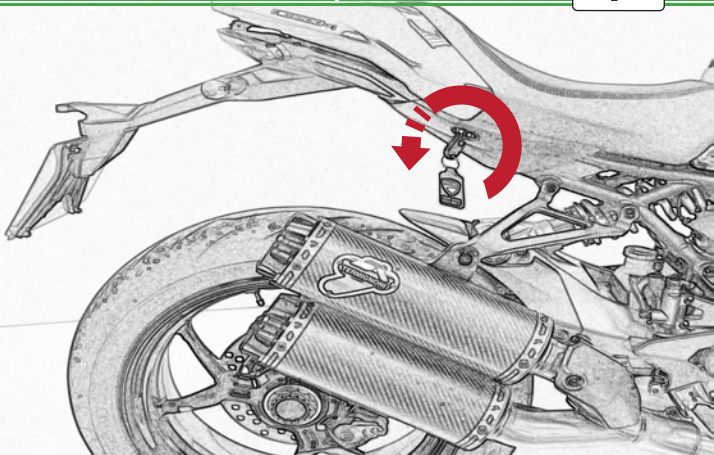


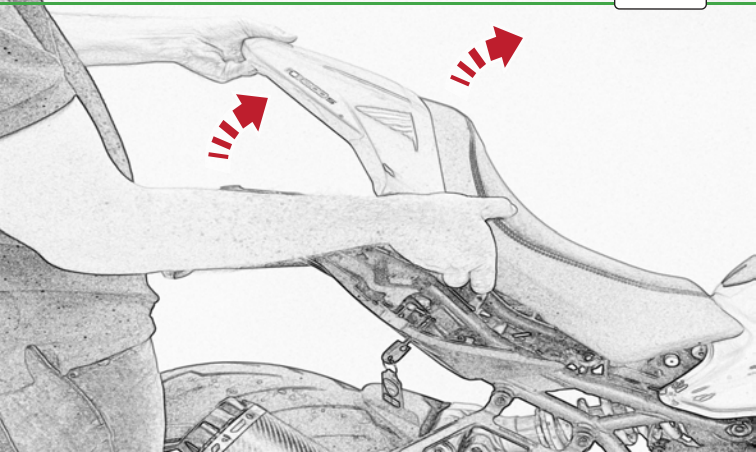


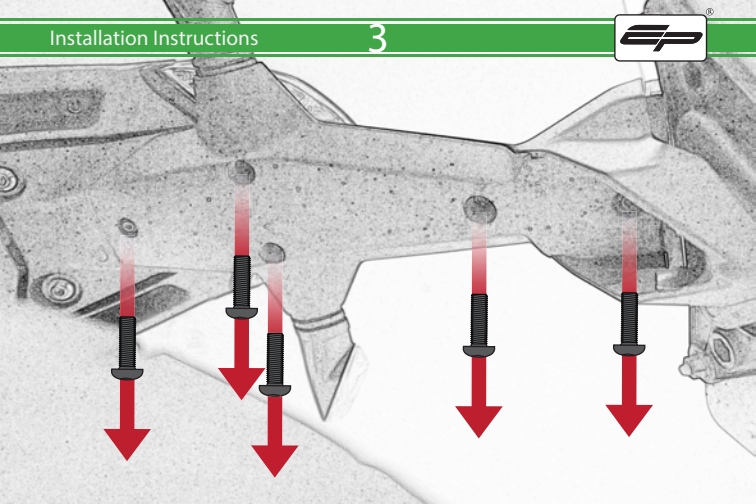


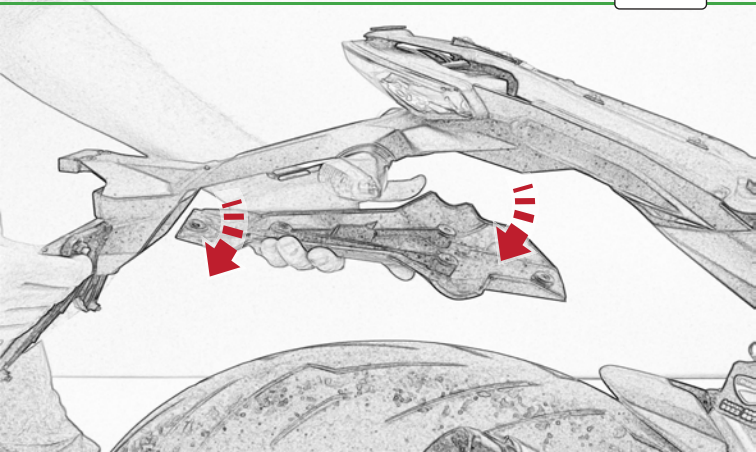


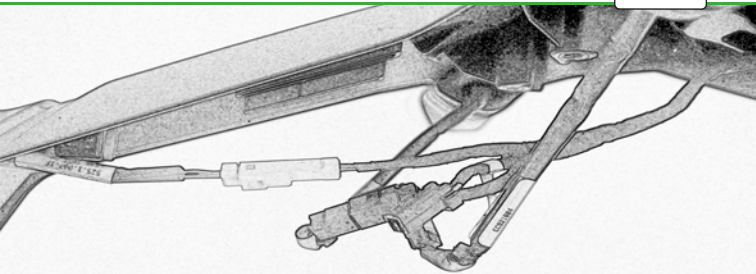


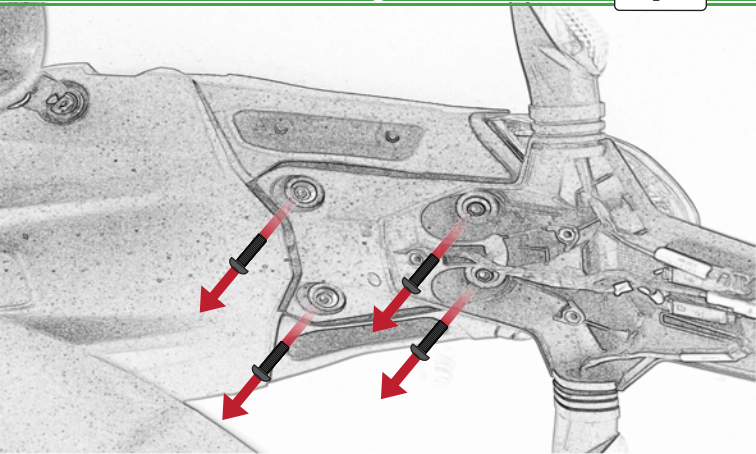


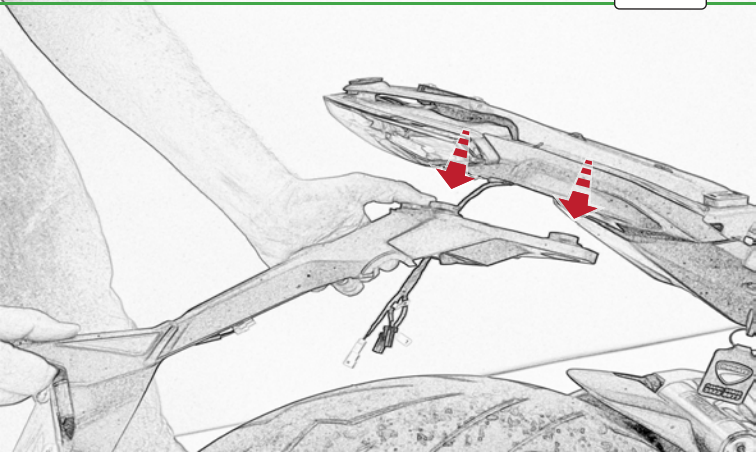


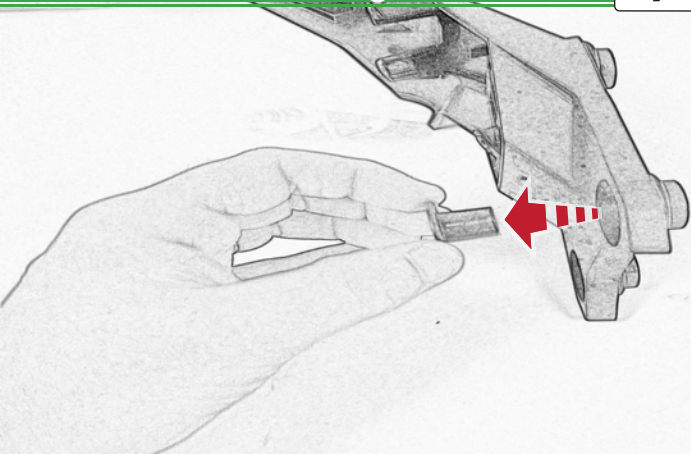

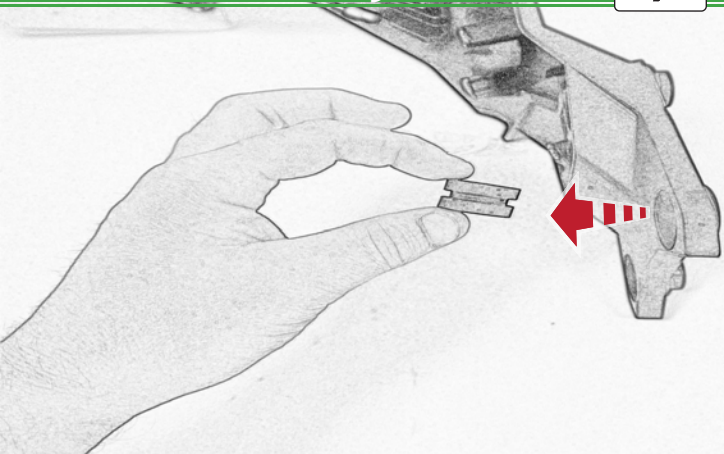

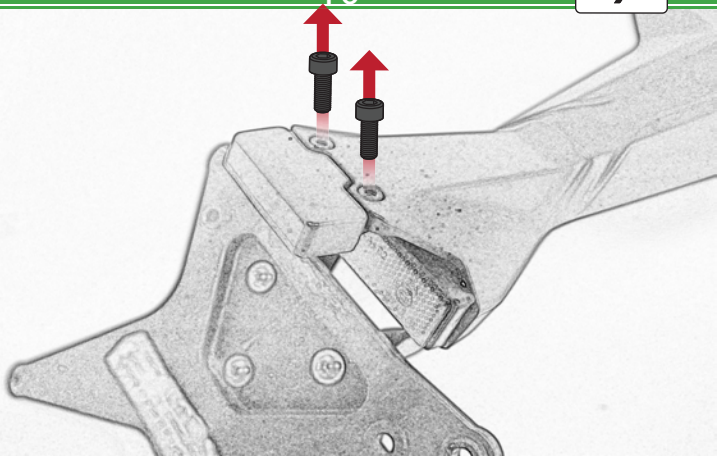

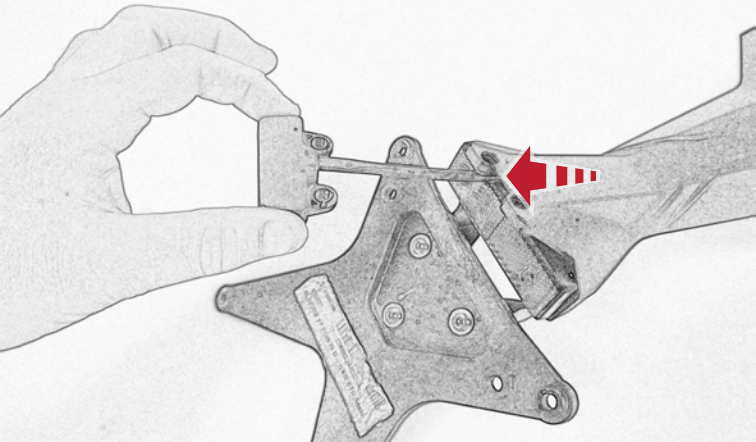

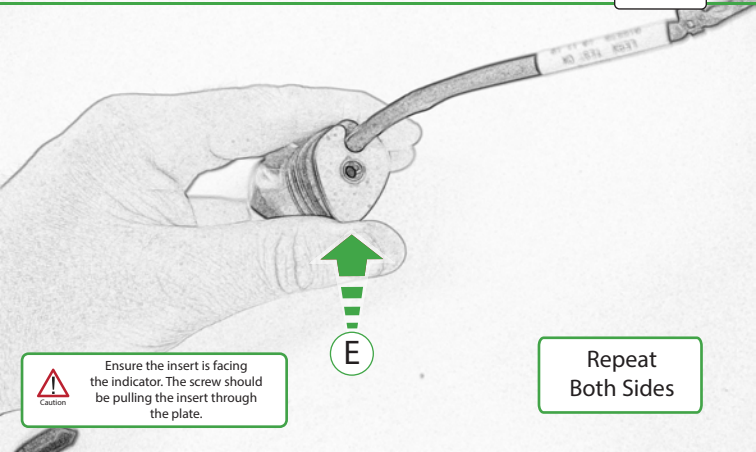


Caution


Ensure the insert is facing the indicator. The screw should be pulling the insert through the plate.

E


Repeat
Both Sides

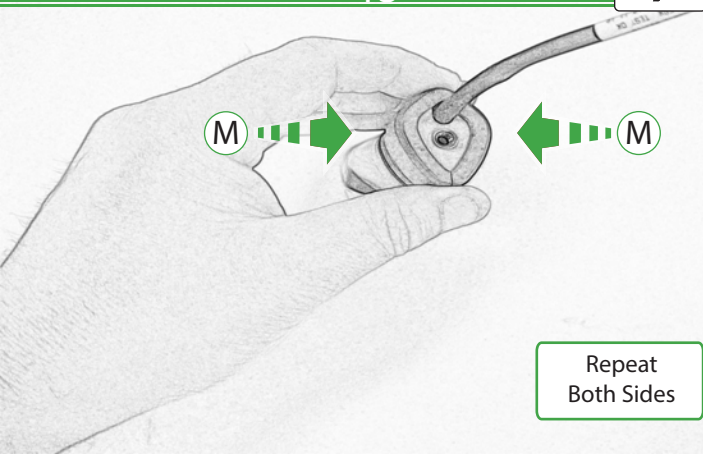


Repeat
Both Sides

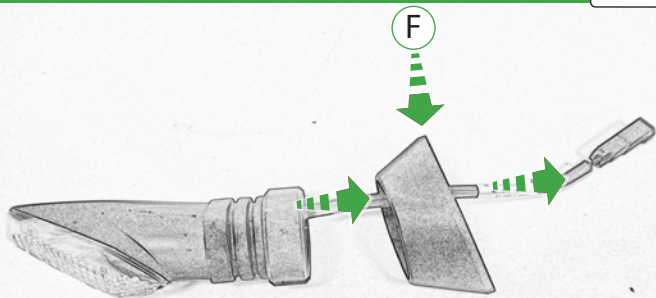



Repeat
Both Sides

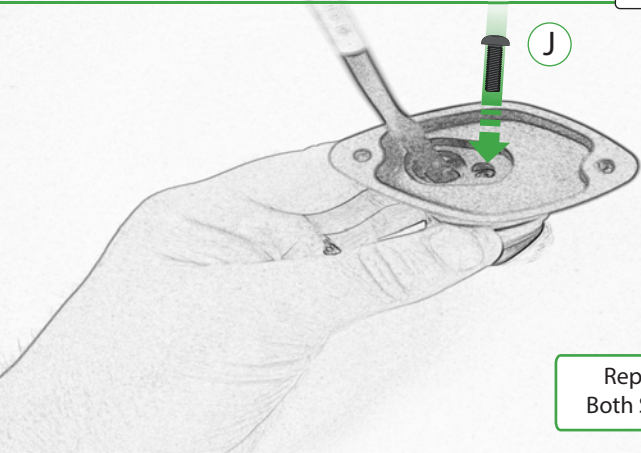


Repeat
Both Sides

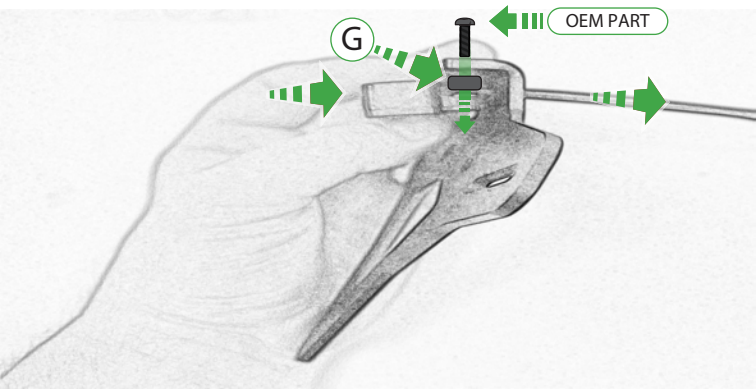

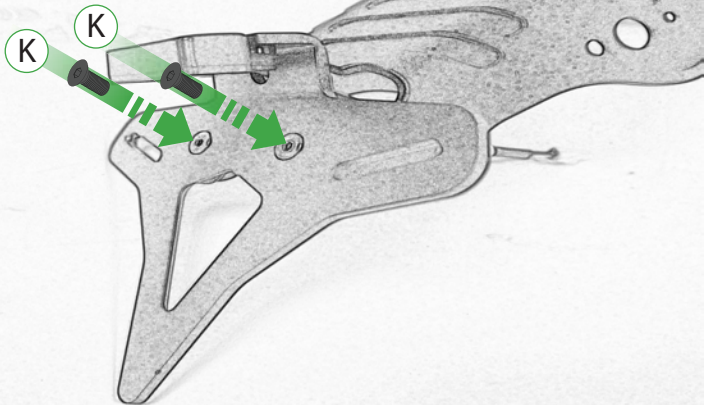


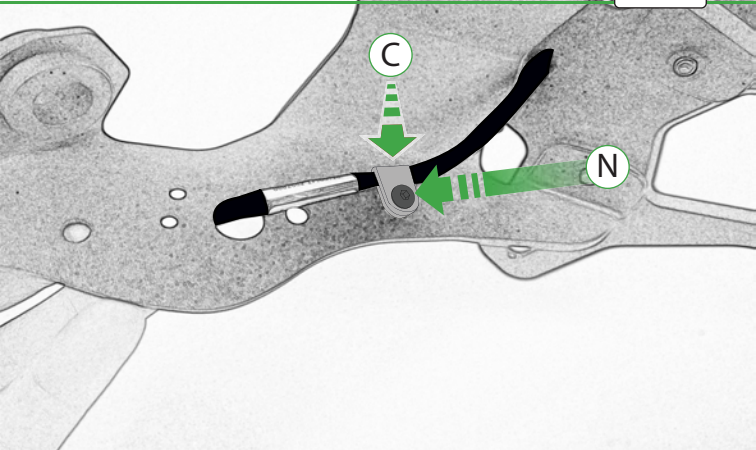


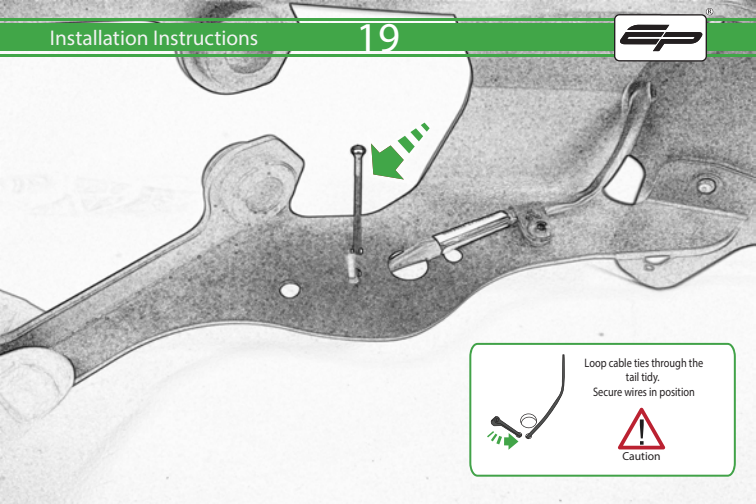



Loop cable ties through the
tail tidy.
Secure wires in position





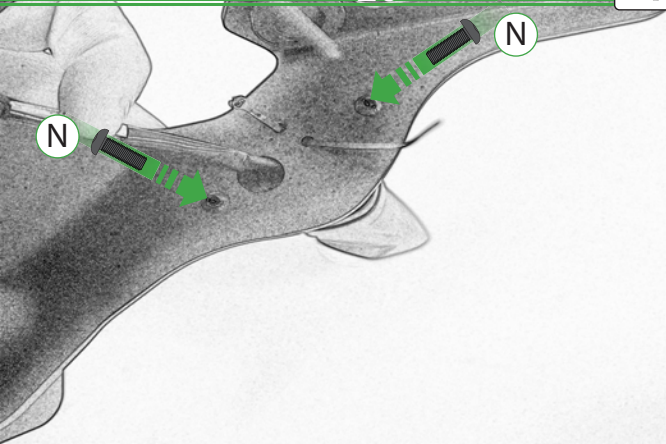


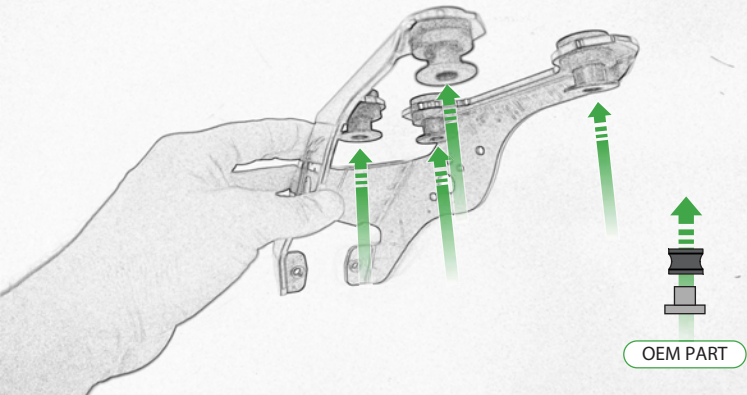


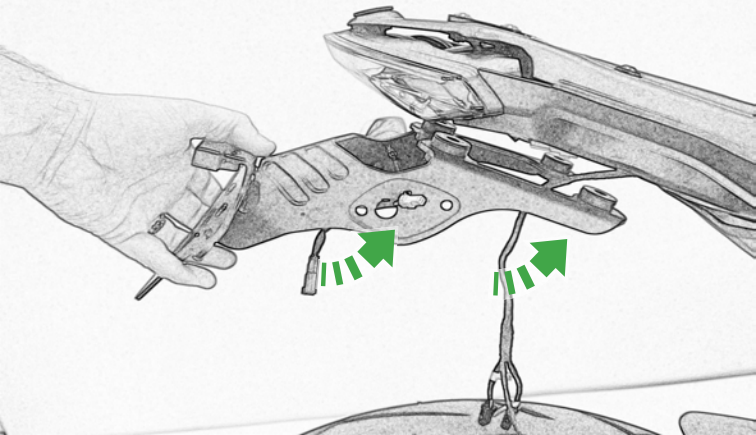

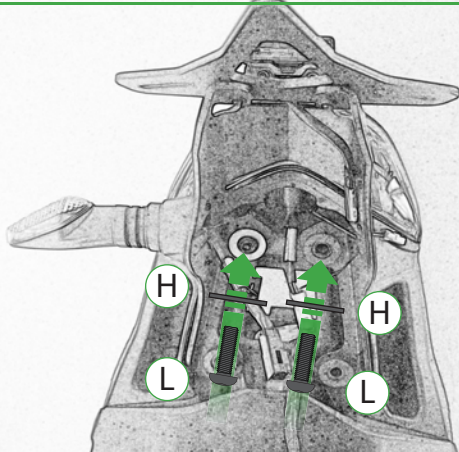

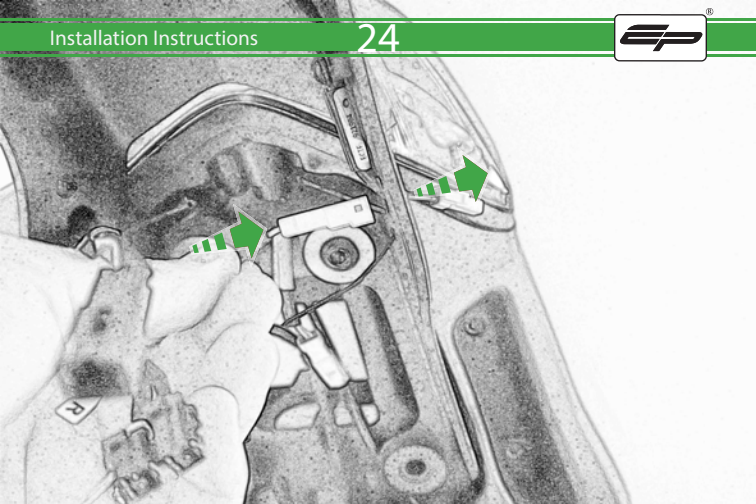

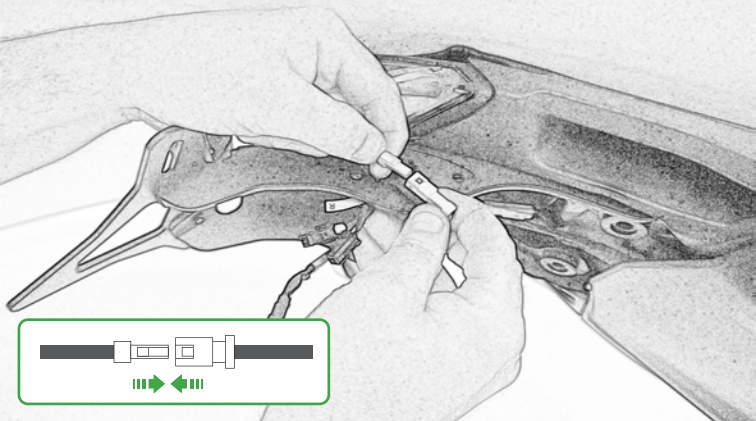


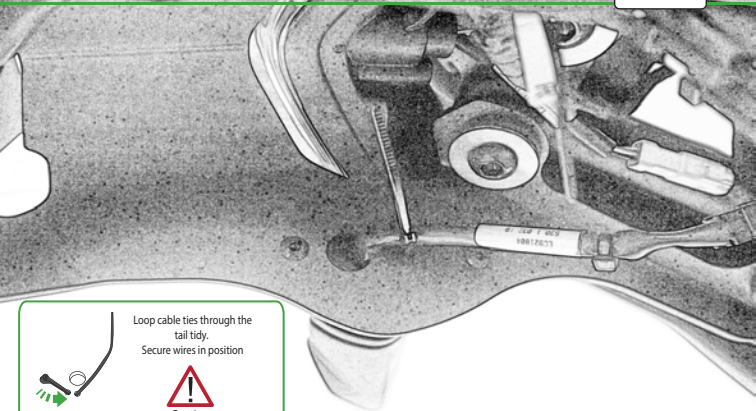



Loop cable ties through the
tail tidy.
Secure wires in position



Caution

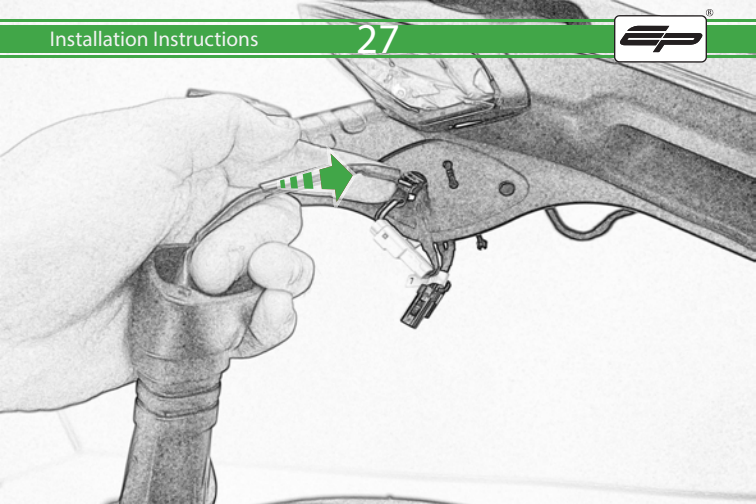

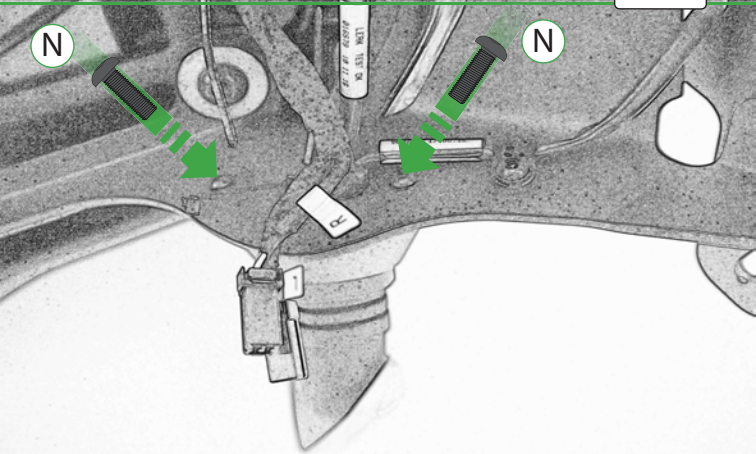

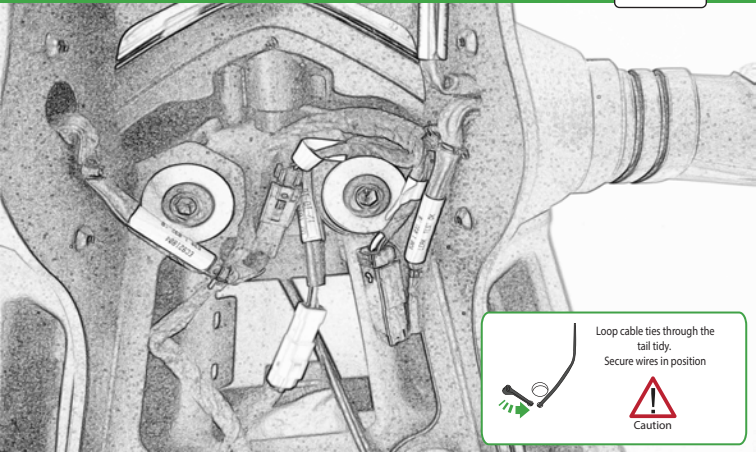


Loop cable ties through the
tail tidy.
Secure wires in position




Caution





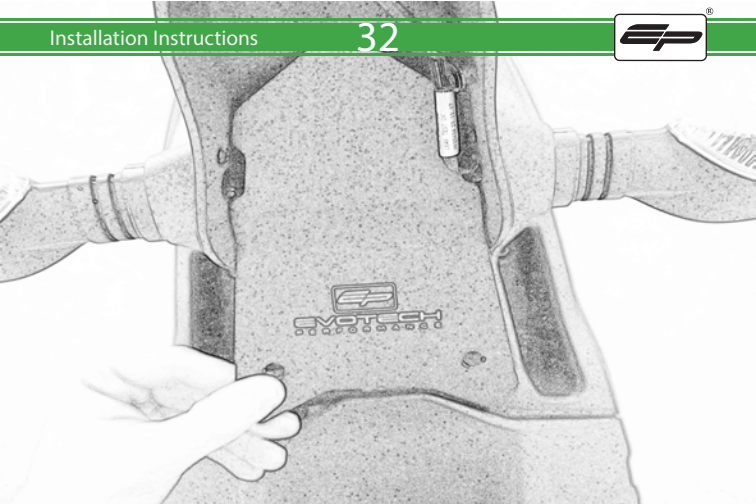


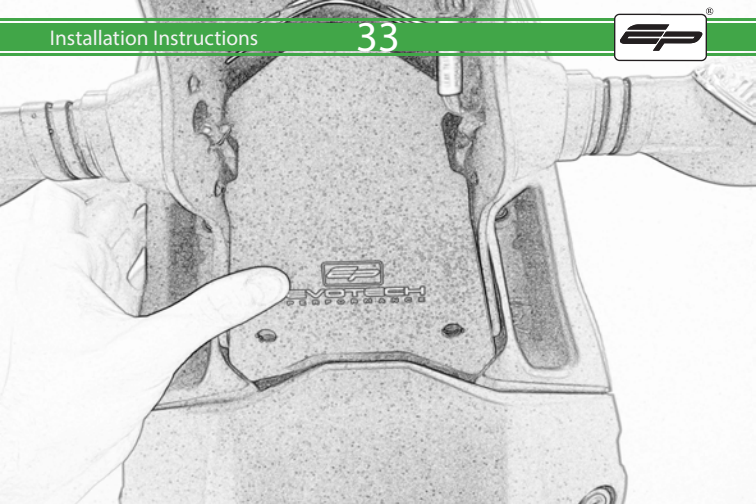




Run wires neatly down the channel
in both parts ensuring they
do not get trapped or squashed



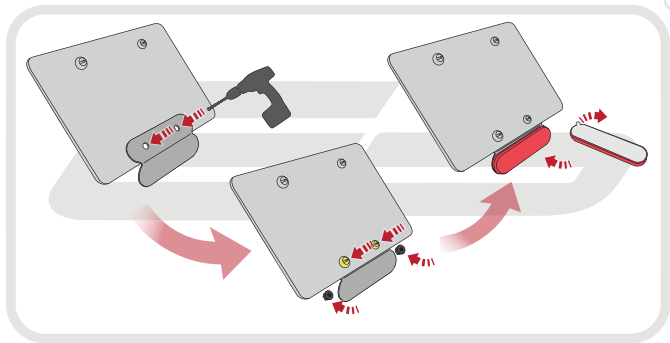

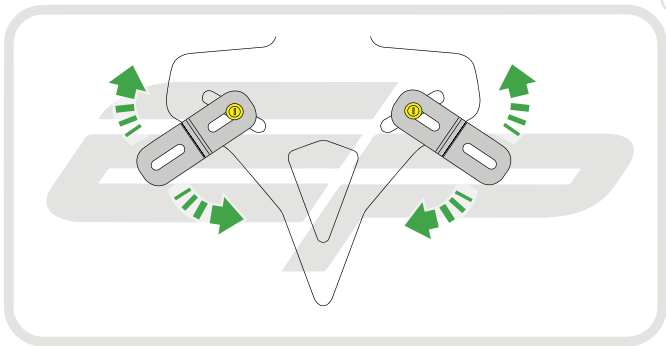



 **ESSENTIAL CHECKS** 

After installation of your tail tidy ensure that the licence plate does not contact the rear tyre when suspension is fully compressed.

Ensure all electrics including indicators, tail light, brake light and licence plate light lights are working correctly before riding the motorcycle.

It is recommended that periodic inspections are made to ensure that all fixings are fully tightend.



EVOTECH®
P E R F O R M A N C E

www.evotech-performance.com