





Performance curve

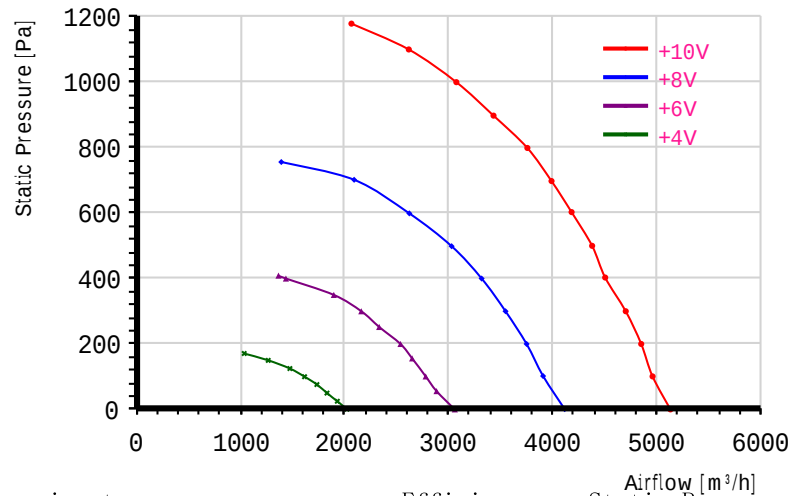


Product Features

- ☞ Motor technology: EC
- ☞ Supply voltage: 3P, 380~480V
- ☞ Supply frequency: 50/60 Hz
- ☞ Rated voltage: 400 VAC
- ☞ Power input: 1330 W
- ☞ Current: 2.1 A
- ☞ Speed: 2880 r/min
- ☞ Perm. amb. temp: -25°C~+50°C
- ☞ Inlet type: Single Inlet
- ☞ Rotation: Counter-clockwise (Seen from cable exit)
- ☞ Protection class: IP54
- ☞ Insulation class: F
- ☞ Impeller material: Sheet aluminium
- ☞ Acoustic: 78 dB(A)
- ☞ Controller: Integrated (Cable line), 0~10V PWM
- ☞ Housing: Without housing; With inlet ring; With bracket; With panel;


Power input

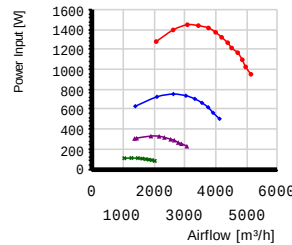

Efficiency on Static Pressure

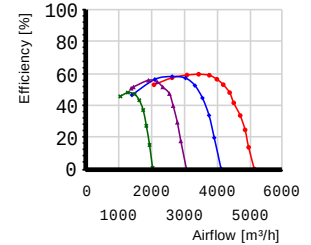

Wiring diagram

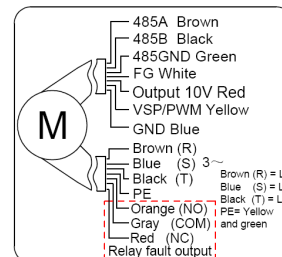

Dimensions (in mm)

