



Hydraulic Control Directional Valve

Model: WHD10...3X



- ◆ Size 10
- ◆ Maximum working pressure 315 bar
- ◆ Maximum working flow 120 L/min

Contents

Function description, sectional drawing	02
Models and specifications	02
Functional symbols	03
Technical parameters	04
Characteristic curve	04
Characteristic limit	05
Component size	06

Features


- Direct operated directional spool valve
- Type of actuation:
Hydraulic (WHD)
- Subplate mounting
- Porting pattern to DIN 2430 Form A,
and ISO4401

Technical parameters

Valve type		WHD
Weight	1 operating cylinder	kg 3.0
	2 operating cylinder	kg 3.3
Oil temperature range		°C -30 to +80 (NBR seal)
		-20 to +80 (FKM seal)
Max. working pressure	oil port A, B, P	bar 315
	oil port T	bar 160
Max. flow		L/min 120
Effective over-flow section (neutral position)	Type V	mm ² 11(A/B → T); 10.3(P → A/B)
	Type W	mm ² 2.5(A/B → T)
	Type Q	mm ² 5.5(A/B → T)
Control pressure		bar 50-160
Working medium		Mineral oil, Phosphate ester
Viscosity range		mm ² /s 2.8 to 500
Cleanliness of oil		The maximum allowable pollution level of oil is ISO4406 Class 20/18/15

Characteristic curve

(Measured when using HLP46, $\vartheta_{oil}=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$)

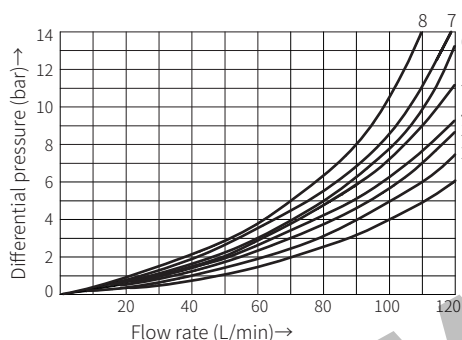


8 Symbols "G" and "T" in neutral position P → T
8 Symbol "R" in switching position A → B

Function symbol	Flow direction			
	P to A	P to B	A to T	B to T
A	4	3	-	-
B	3	4	-	-
C	3	3	4	4
D	3	3	5	5
E	2	2	4	4
F	1	2	3	4
G, T	4	4	7	7
H	1	1	5	5
J	2	2	3	3
L	3	3	2	4
M	1	1	4	4
P	3	1	5	5
Q	2	2	2	2
R	3	4	3	-
U	3	3	5	2
V	2	2	3	3
W	3	3	3	3
Y	4	4	6	6







Characteristic limit

Because of adhesive effect, the switching function of the valves depends on the filtration. In order to achieve the specified admissible flow values, we suggest full flow filtration with 25μm. The flow force acting within the valves also affect the flow performance. With 4 way valves the specified flow data thus apply to normal operation with 2 volume flow directions(e.g. from P to A and at the same time return flow from B to T)

If only one flow direction is available, when 4-way valve is used as a 3-way valve by blocking port A or B, the flow can be significantly smaller in critical cases.

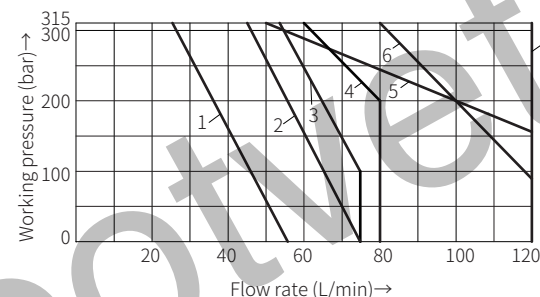

Curve	Function symbol
1	A, B
2	A/O
3	H
4	F, G, P, R, T
5	J, L, Q, U, W
6	C, D, E, M, V, Y
7	C/O, C/OF D/O, D/OF

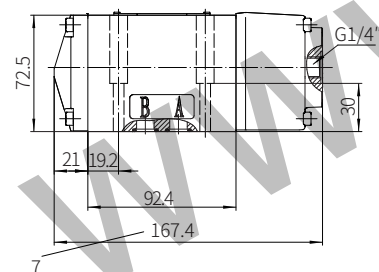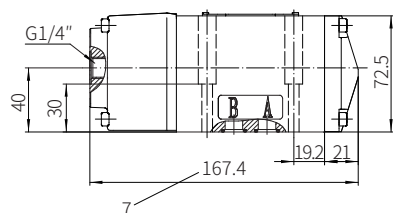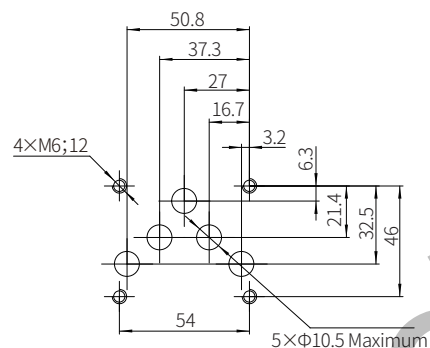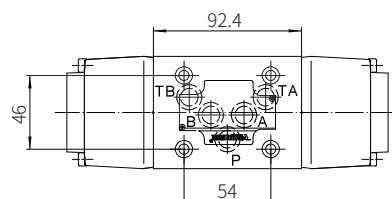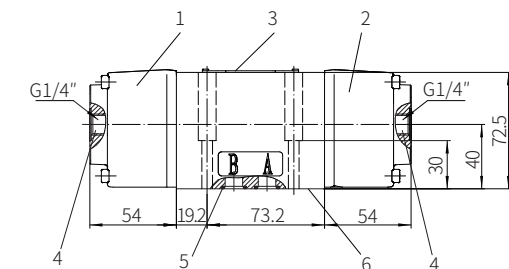

- 1 Actuation cylinder "b"
- 2 Actuation cylinder "a"
- 3 Name plate
- 4 Control port thread G1/4"
- 5 O-ring 12x2 (for oil ports P, A, B, TA, TB)
- 6 Connection surfaces
- 7 Size of 2-position valve

Valve fixing screw
M6x40-10.9 grade GB/T70.1-2000
Tightening torque $M_A=13.7\text{Nm}$

It must be ordered separately
if connection subplate is needed.
Subplate model:
G66/01 (G3/8"); G66/02 (M18x1.5)
G67/01 (G1/2"); G67/02 (M22x1.5)
G534/01 (G3/4"); G534/02 (M27x2)

Solenoid Operated Poppet Valve

Model: M-SEW6...3XJ



- ◆ Size 6
- ◆ Maximum working pressure 420/630 bar
- ◆ Maximum working flow 25 L/min

Contents

Function description, sectional drawing	02-03
Models and specifications	04
Technical Parameters	05
Characteristic curve	06
Characteristic limit	07
Component size	08-09
Application examples	10

Features

- Direct operated solenoid directional poppet valve
- Closed port without leakage
- Switching smoothly even in high-pressure state long periods