


# *DOORHAN*<sup>®</sup>


## Светодиодная подсветка стрелы BOOM-LED

## Barrier Boom LED Lighting of BOOM-LED Series

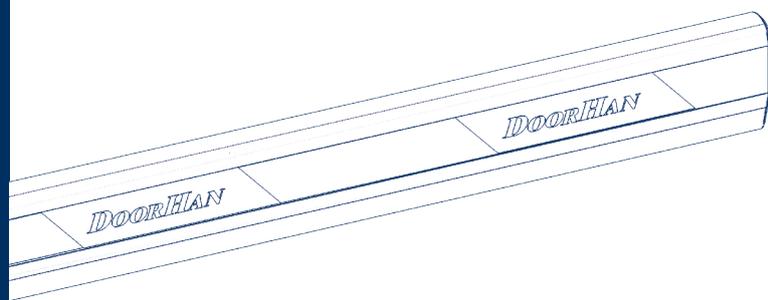





Руководство по подключению / Connection Guide







## 1. ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ / SPECIFICATIONS

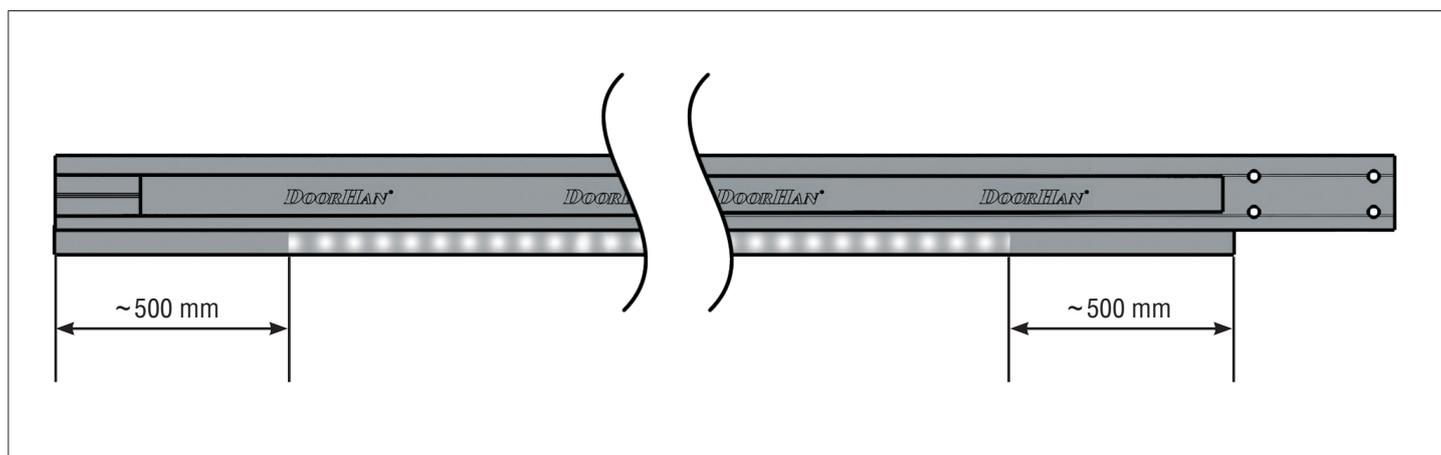

Параметры / Parameters	Значение / Value
Питающее напряжение / Supply voltage	220–240 V, 50 Hz
Температурный диапазон / Operating temperature	-40...+55 °C
Класс защиты / Protection class	IP 54


## 2. МОНТАЖ / INSTALLATION

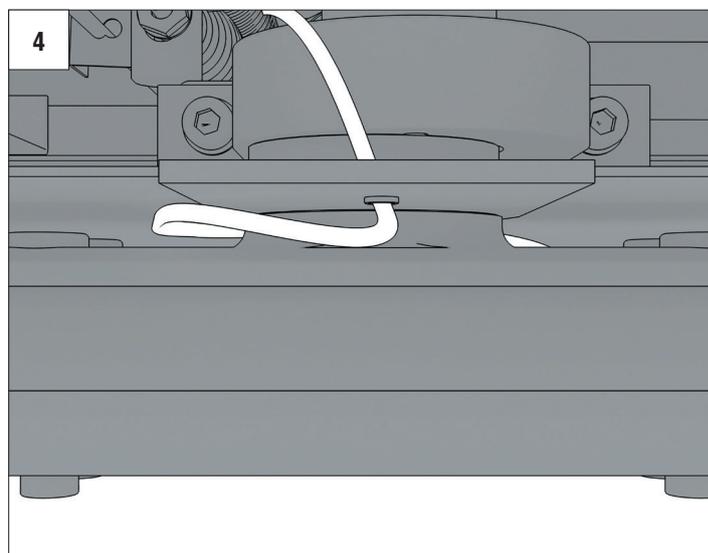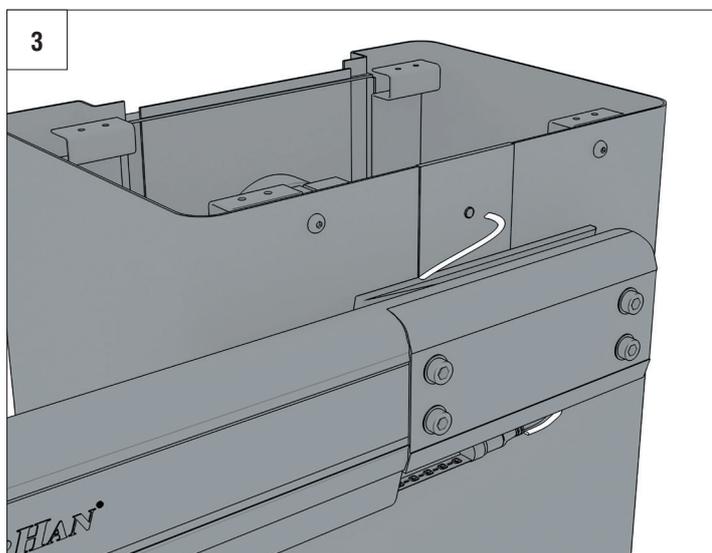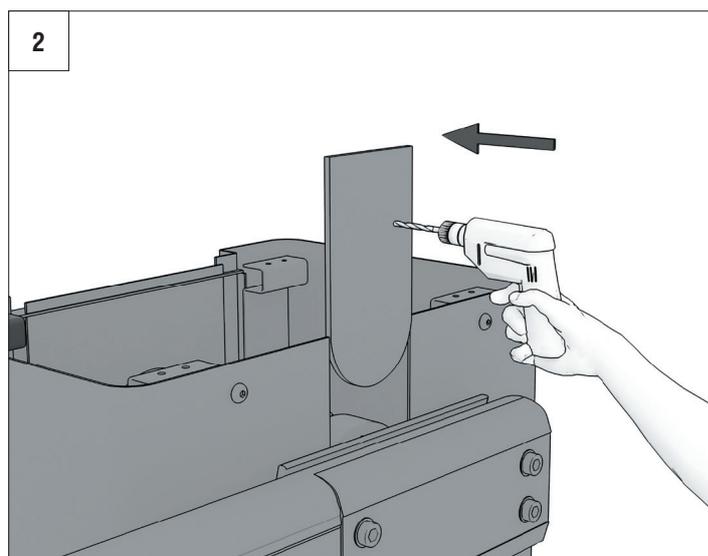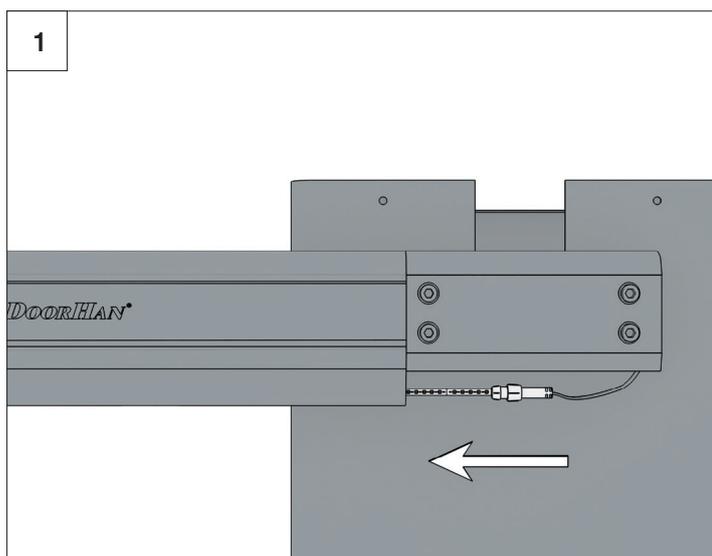

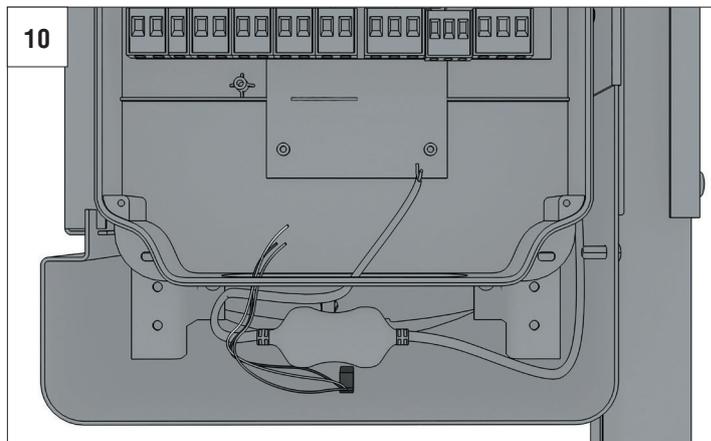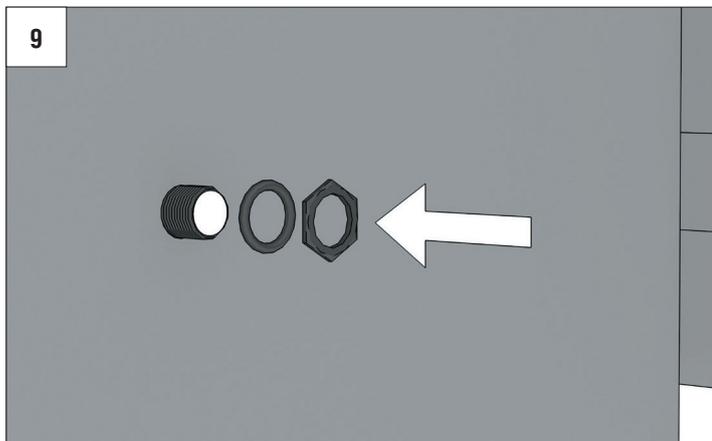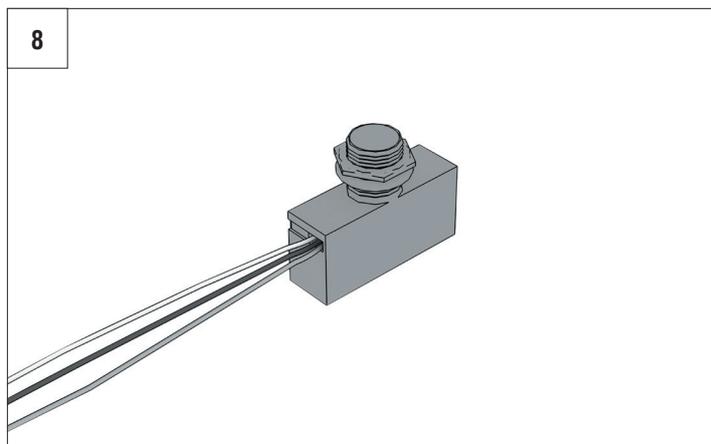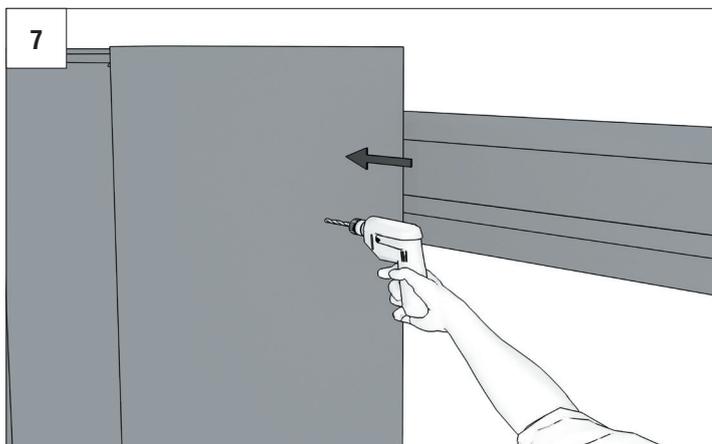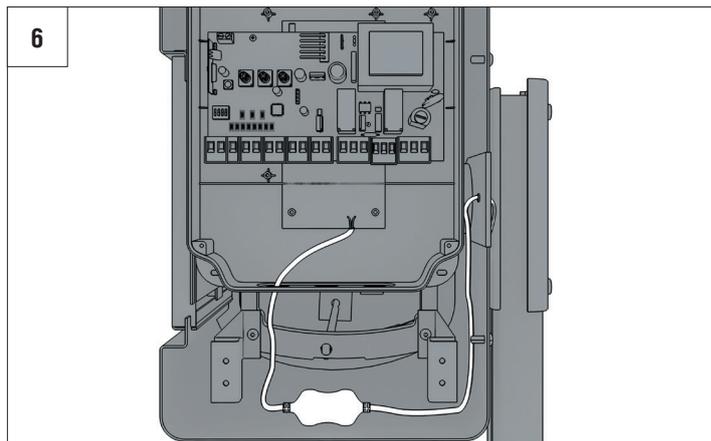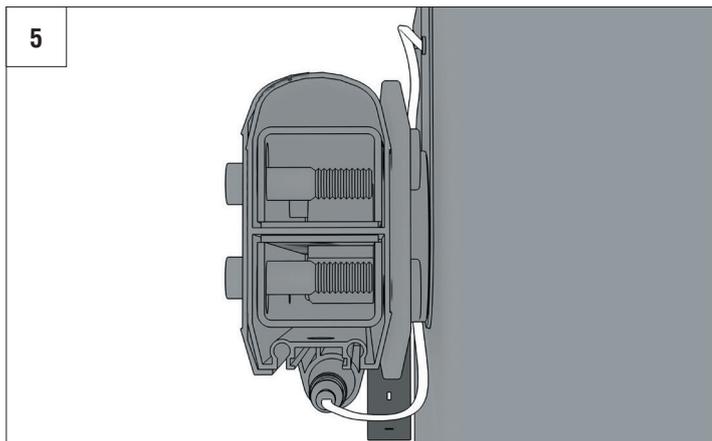

### 3. СХЕМА ПОДКЛЮЧЕНИЯ / WIRING DIAGRAM

Маркировку цвета проводов смотреть на датчике/ For wiring colour codes see the sensor

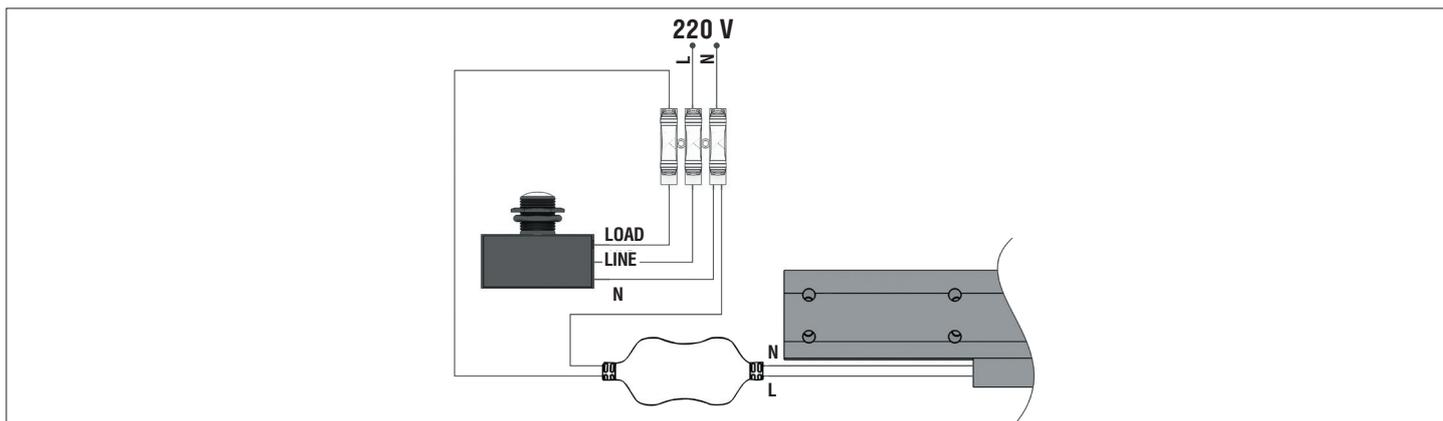

# *DOORHAN*<sup>®</sup>

Компания DoorHan благодарит вас за приобретение нашей продукции. Мы надеемся, что вы останетесь довольны качеством данного изделия.

По вопросам приобретения, дистрибьюции и технического обслуживания обращайтесь в офисы региональных представителей или центральный офис компании по адресу:  
ГК DoorHan  
Россия, 143002, Московская обл., г. Одинцово,  
с. Акулово, ул. Новая, д. 120, стр. 1  
Тел.: 8 495 933-24-00  
E-mail: [info@doorhan.ru](mailto:info@doorhan.ru)  
[www.doorhan.ru](http://www.doorhan.ru)

We very much appreciate that you have chosen the product manufactured by our company and believe that you will be satisfied with its quality.

For information on purchasing, distribution and servicing contact DoorHan central office at:

120 Novaya street bld. 1, Akulovo village,  
Odintsovo, Moscow region,  
143002, Russia  
Phone: +7 495 933-24-00  
E-mail: [info@doorhan.com](mailto:info@doorhan.com)  
[www.doorhan.com](http://www.doorhan.com)