

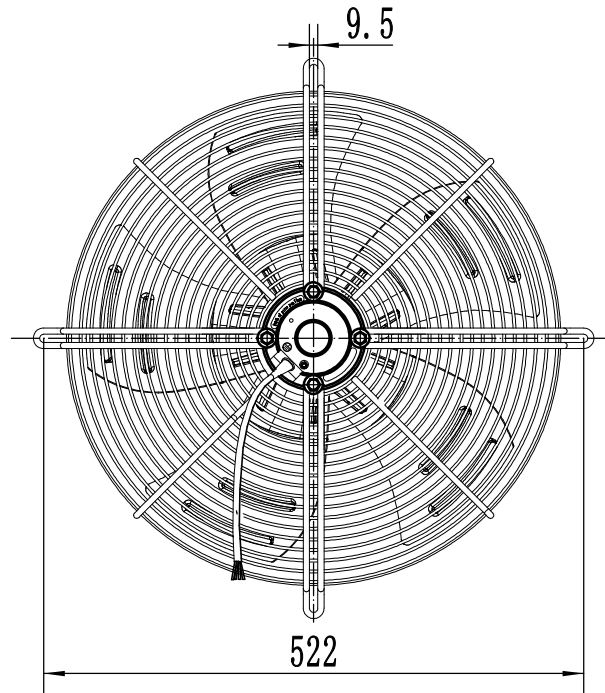



NO. 4D450S-2022-A0

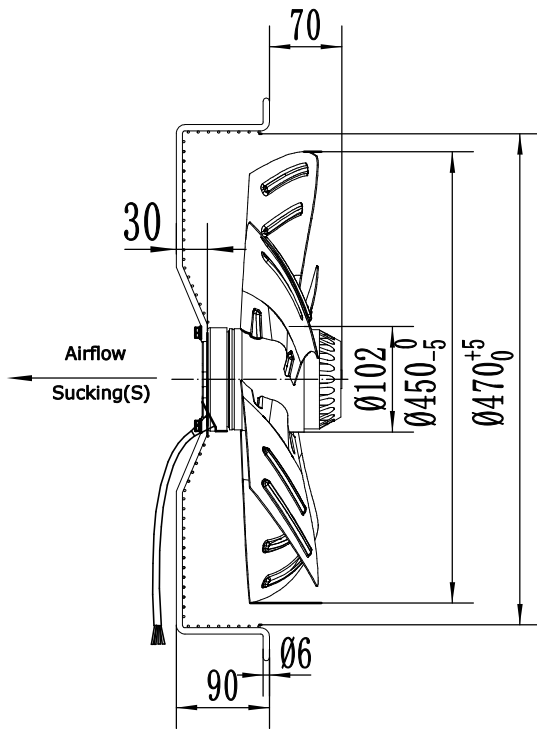


LABEL (铭牌):

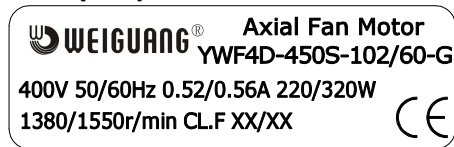

WIRING DIAGRAM (接线图):

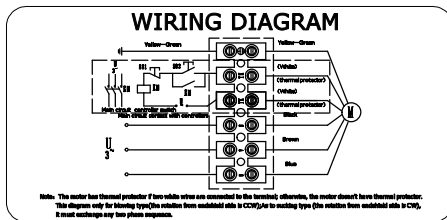

FLOW RATE CURVE (风量曲线):

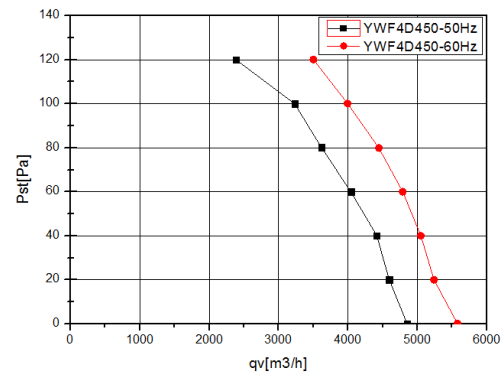

WEIGUANG®

SPECIFICATION 规格说明
HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Three phases motor
MOTOR TYPE 电机型号	YWF4D-450S-102/60-G
VOLTAGE 额定电压 (V)	400
FREQUENCY 频率 (Hz)	50/60
INPUT POWER 输入功率 (W)	220/320
CURRENT 电流 (A)	0.52/0.56
SPEED 转速 (r/min)	1380/1550
AIR FLOW 风量 20Pa (m³/h)	4596/5241
NOISE 噪音 (dBA)	69/70
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
TYPE OF PROTECTION 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire RV-90 4G 0.50mm² ,Length 1500±15mm 斜出线 (4芯0.5mm²线长1500±15mm)
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT净重/毛重	8.0/9.0kg
PACKING 包装	48.5*48.5*18cm

REV.	DESCRIPTION	APPROVED	DATE	DRN. BY	SIGN	DATE	TITLE
				CHD. BY			YWF4D-450S-102/60-G
				ENG. BY			PROJECTION
				APP. BY			A4
							SCALE
							SHEET: of