




NO. 2E250S-2022-A0

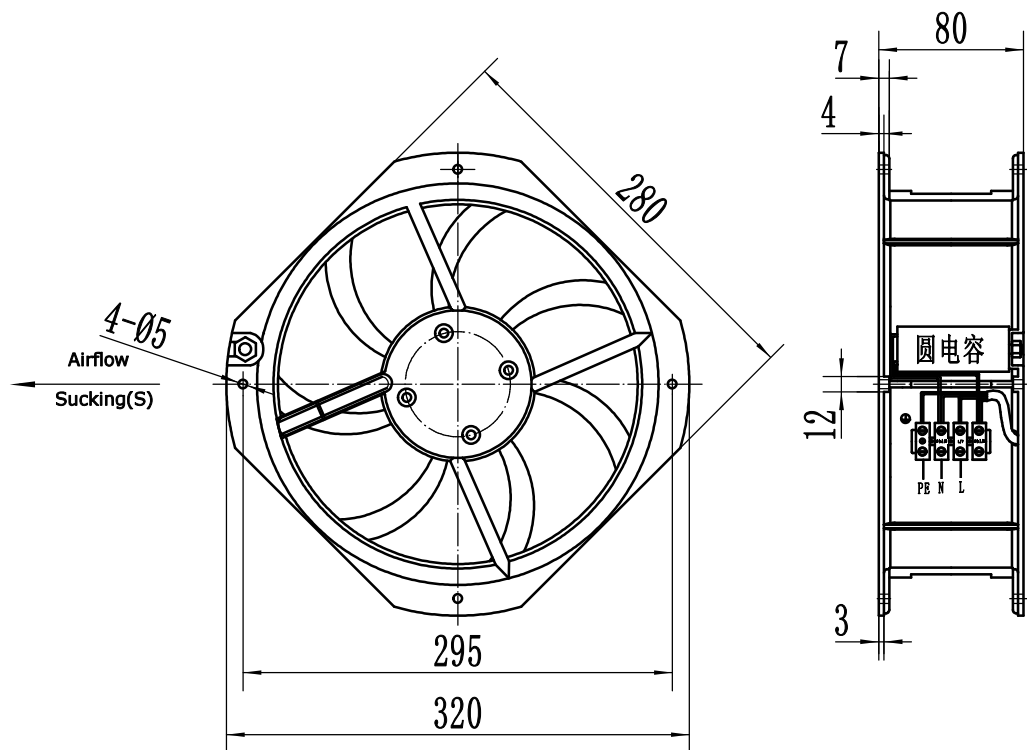


LABEL (铭牌):

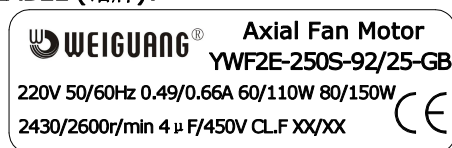

WIRING DIAGRAM (接线图):

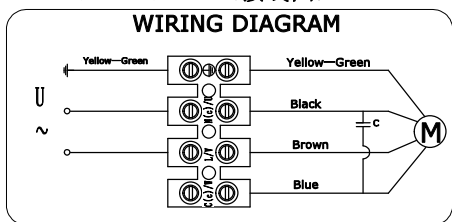


FLOW RATE CURVE (风量曲线):

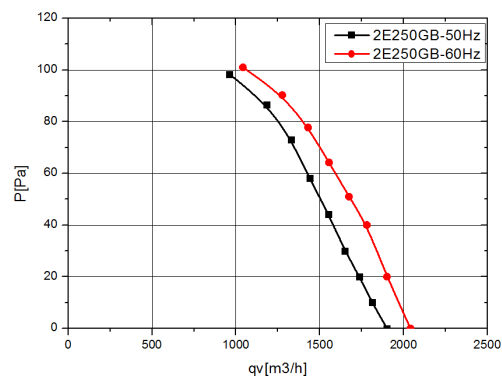

WEIGUANG®

SPECIFICATION 规格说明  
HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.

|                               |                                                               |
|-------------------------------|---------------------------------------------------------------|
| UNIT 类型                       | Axial fan motor 外转子轴流风机                                       |
| MOTOR 电机型式                    | Single phase motor with capacitor                             |
| MOTOR TYPE 电机型号               | YWF2E-250S-92/25-GB                                           |
| VOLTAGE 额定电压 (V)              | 220                                                           |
| FREQUENCY 频率 (Hz)             | 50/60                                                         |
| INPUT POWER 输入功率 (W)          | 110/150                                                       |
| CURRENT 电流 (A)                | 0.49/0.66                                                     |
| SPEED 转速 (r/min)              | 2430/2600                                                     |
| AIR FLOW 20Pa 风量 (m³/h)       | 1736/1900                                                     |
| NOISE 噪音 (dBA)                | 60/61                                                         |
| CAPACITOR 电容 (μF/450V)        | 4                                                             |
| ROTATION 旋转方向                 | CCW ,looking into the end-shield<br>逆时针, 从端盖端方向看              |
| INSULATION CLASS 绝缘等级         | F                                                             |
| MOTOR PROTECTION 电机保护         | Thermocontact 150±5℃ 热保护器                                     |
| TEMPERATURE RISE 温升           | 75K max 运行温升不超过75K                                            |
| TYPE OF PROTECTION 防护等级       | IP54                                                          |
| OPERATING TYPE 工作定额           | S1 连续工作制                                                      |
| AMBIENT TEMPERATURE 适用环境温度    | -30℃ +60℃                                                     |
| BEARINGS 轴承型式                 | Ball bearings 滚珠轴承                                            |
| MOUNTING TYPE 安装方式            | Square Frame 工频方框                                             |
| ELECTRICAL CONNECTION 电源线     | Lead wire 4G 0.50mm² ,Length 220mm<br>单芯0.22米( 外露) 四芯线, 不用护套线 |
| APPROVALS 认证标记                | CE                                                            |
| NET WEIGHT/GROSS WEIGHT 净重/毛重 | 2.5/3.0kg                                                     |
| PACKING 包装                    | 29.5*29.5*10cm                                                |

| REV. | DESCRIPTION | APPROVED | DATE | DRN. BY | SIGN | DATE | TITLE                                                                                            |
|------|-------------|----------|------|---------|------|------|--------------------------------------------------------------------------------------------------|
|      |             |          |      | CHD. BY |      |      | YWF2E-250S-92/25-GB                                                                              |
|      |             |          |      | ENG. BY |      |      | PROJECTION  |
|      |             |          |      | APP. BY |      |      | A4<br>SCALE<br>SHEET: of                                                                         |