

# Filterelement

## Filter element

PI3105PS10

### Material-Nr.:

Material no.:

### Bezeichnung:

Designation:

### Filterfeinheit<sup>1</sup>:

10 µm

Filtration grade<sup>1</sup>:

### Filtrationsquotient<sup>1</sup>:

$\beta_{10}(c) = 200 / \beta_{11}(c) = 1000$  (ISO 16889)

Filtration ratio<sup>1</sup>:

### Filtermaterial<sup>1</sup>:

Glasfasermaterial PWR / H..XL

Filter media<sup>1</sup>:

glass fiber material PWR / H..XL

### Kollapsdruckbeständigkeit bar [psi]:

20 [290]

Collapse pressure rating bar [psi]:

### Temperaturbeständigkeit °C [°F]:

-40...100 [-40...212]

Temperature rating °C [°F]:

### Bypass Öffnungsdruck bar [psi]:

∅

Bypass cracking pressure bar [psi]:

### Dichtungswerkstoff:

NBR

Sealing material:

### Abmessungen mm [inch]:

Dimensions mm [inch]:


OD = 47,0 [1.9]

ID = 25,5 [1.0]

L = 93,0 [3.7]

Gewicht kg [lbs]: 0,1 [0.3]

Weight kg [lbs]:

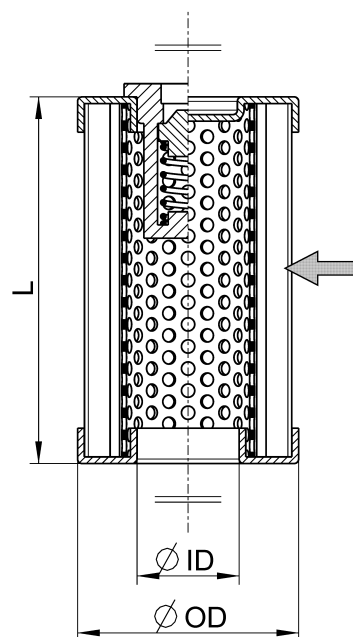

Vereinfachte Darstellung  
The drawing shown is a simplistic representation