

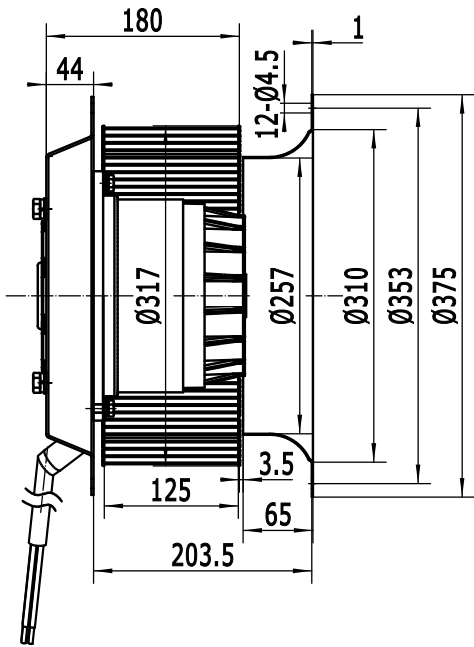
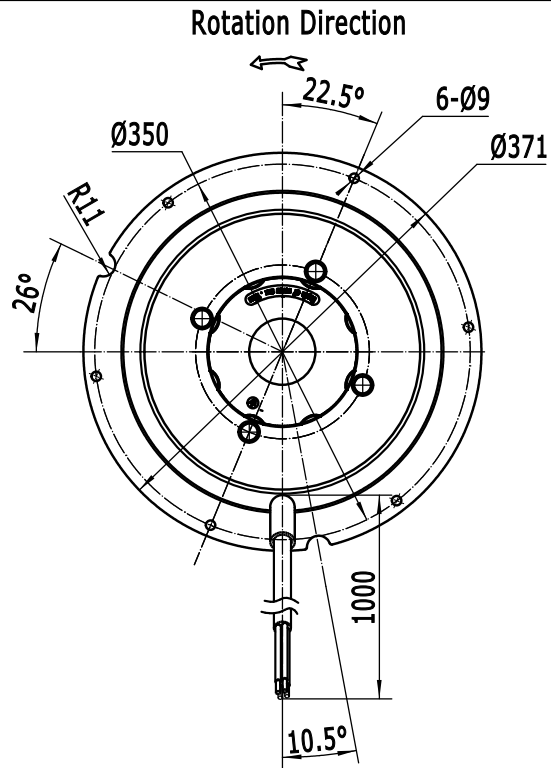
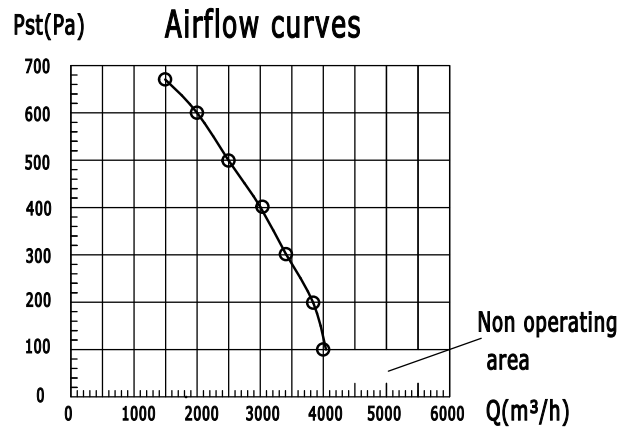


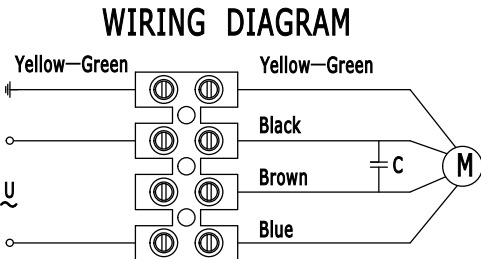

LABEL:



External Rotor Motor

Hangzhou Weiguang Electronic Co.,Ltd.

Unit: External Rotor Motor

Type:

Motor: single phase motor with capacitor

Customer:

Motor type: LXFF4E315/125-M180/75-AA02

Customer-type:

Voltage V	Frequency Hz	Input power W	Current A	Speed r/min	Capacitor μ F/ V _{AC}	Remarks 100Pa
230	50	2100	9.3	1350	60	With Housing

Insulation class : F

Operating type: S_1

Permissible ambient temperature : -30℃~60℃
--

Temperature increase:

Motor protection:thermocontact	150±5℃
--------------------------------	--------

Bearings: ball bearings

Model meanings:

LXFF4 E 315/125- M180/75- AA02

Centrifugal Fan

Forward

Motor poles

single phase

The diameter of the imperller

The thickness of impeller

Item

The thickness of laminated core

The diameter of the rotor

Metal

Electrical connection: lead wire Silikon 4*16AWG+2*0.5mm² , Length 1000±20mm

				DECIMAL	TOLERANCE		SIGN	DATE	TITLE LXFF4E315/125-M180/75-AA02	
				X	±0.5	DRN.BY	chunboliu	03/01-22		
				X.X	±0.25	CHD.BY			PROJECTION 	A4
				X.XX	±0.15	ENG.BY				SCALE
REV.	DESCRIPTION	APPROVED	DATE	ANGLE	±3°	APP.BY				SHEET: 1 of 1