





LABEL (铭牌):

**WEIGUANG®**


Axial Fan Motor
YWF6D-710S-180/75-G
△ 380V 50Hz 1.90A 700/900W 900r/min
Y 380V 50Hz 1.15A 494/650W 730r/min
CL.F IP54 XX/XX

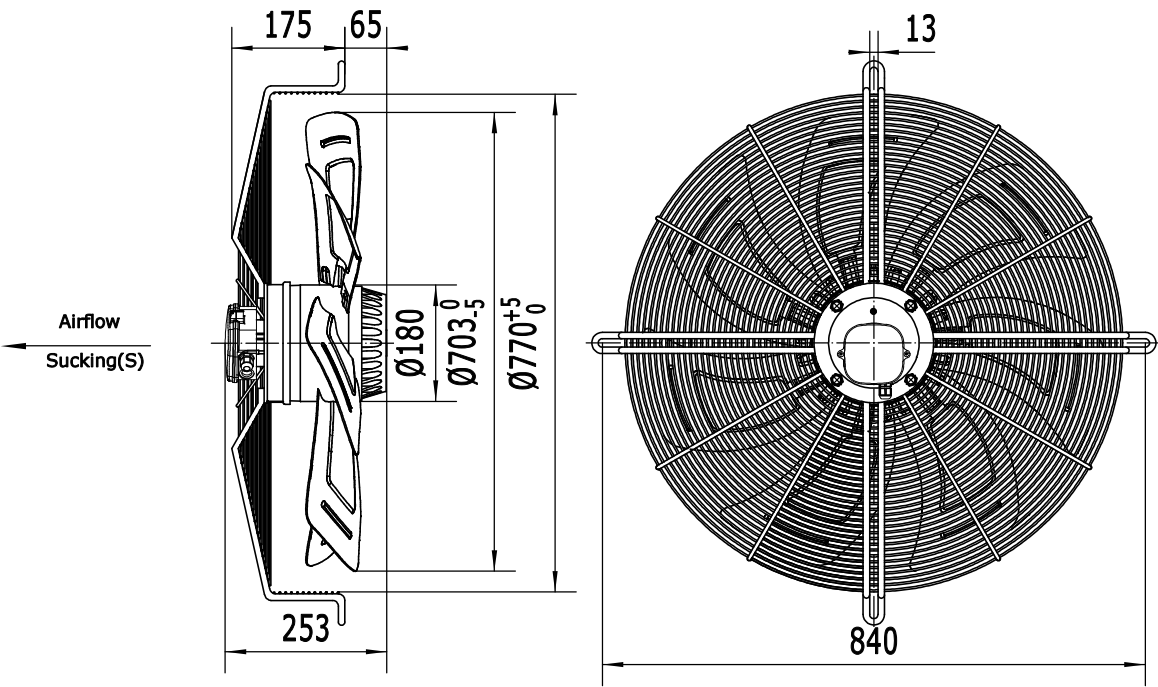


WIRING DIAGRAM (接线图):

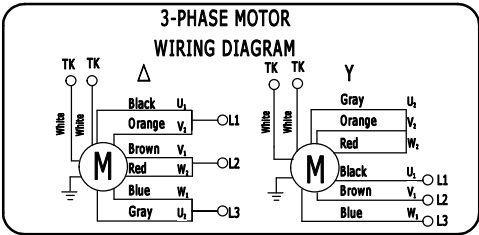

FLOW RATE CURVE (风量曲线):

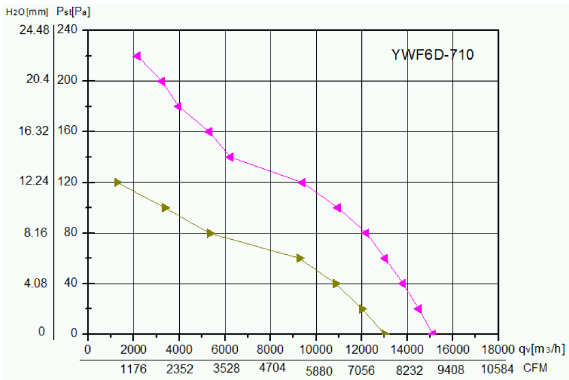

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Three phases motor
MOTOR TYPE 电机型号	YWF6D-710S-180/75-G
VOLTAGE 额定电压 (V)	380
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	△/Y 900/650
CURRENT 电流 (A)	△/Y 1.90/1.15
SPEED 转速 (r/min)	△/Y 900/730
AIR FLOW 风量 20Pa(m³/h)	△/Y 14500/12015
NOISE 噪音 (dBA)	△/Y 73/72
ROTATION 旋转方向	CW ,looking into the end-shield 顺时针, 从端盖端方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器
TEMPERATURE RISE 温升	75K max 运行温升不超过75K
PROTECTION CLASS 防护等级	IP54
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-30℃ +60℃
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 7G 1.31mm²+ 2G 0.35mm², Length 100mm in terminal box connected 接线盒 (7芯1.31mm²+2芯0.35mm²线长100mm)
APPROVALS 认证标记	CCC、CE
NET WEIGHT/GROSS WEIGHT净重/毛重	30/45kg
PACKING 包装	80*80*27.5cm

								SIGN		DATE	TITLE	
								DRN.BY			YWF6D-710S-180/75-G	
								CHD.BY				
								ENG.BY				
								APP.BY			PROJECTION	
												
											A4	
											SCALE	
											SHEET: of	
REV.	DESCRIPTION	APPROVED	DATE									